



ASSEMBLY INSTRUCTIONS

Nightstand

MOD-7070 / V5.04.27.26

modway



Questions? Contact us!

609.256.9000

cs@modway.com

Welcome.

Let's get started.

Before you begin, here are some things to keep in mind:

Assembly will take most people **about 45 minutes**. Consider having a friend help you!

Only use hand tools to assemble this item
Do not use power tools. Do not tighten bolts or screws completely until all hardware is lined up and inserted into the holes.

Read through all of the instructions before starting. Make sure you have all parts and components before discarding any packing materials.

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Assemble your item on a flat, carpeted area, with plenty of space to work. This will prevent damage and scratches to your floors or the item while you're assembling the product.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.


















Care instructions are listed in the last step of this manual.

WAIT!

Missing parts or hardware? Need assistance?
Contact us before returning your item.
We're here to help!



HARDWARE INCLUDED IN THE BOX:

A		Cam Bolt Ø6 x 35 mm	x8
B		Cam Lock Ø15 mm	x8
C		Cam Lock Ø12 mm	x4
D		Wood Dowel Ø8 x 30 mm	x32
E		Wood Dowel Ø6 x 30 mm	x2
F		Screw M 7 x 50 mm	x4
G		Allen Key	x1
H		Screw M 6 x 10.5 mm	x4
I		Screw M 3.5 x 13 mm	x6
J		Screw M 4 x 39 mm	x4
K		Screw M 6.4 x 25 mm	x4
L		Floor Protector	x4
M		Wedge	x8
N		Screw M 3.5 x 15.5 mm	x8
O		Screw Cap Ø15 mm	x4
P		Cam Bolt Ø6 x 32 mm	x4
RM30A		Drawer Runner	x1

WHAT YOU NEED:




Phillips



Phillips Head Screwdriver

FURNITURE COMPONENTS INCLUDED IN THE BOX:

All parts are numbered with a sticker according to this list.

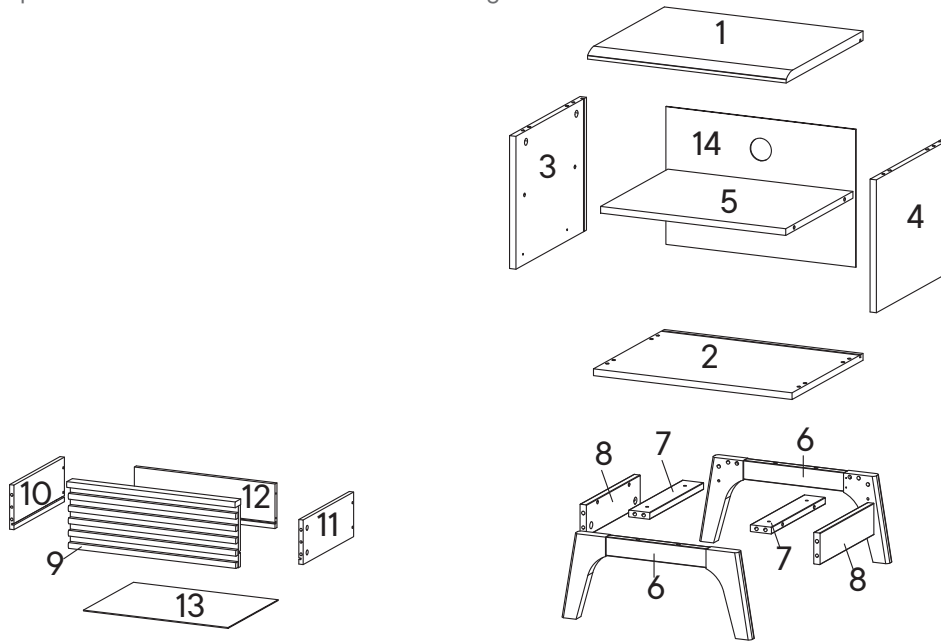

1	Top Board	x1	11	Side Drawer Right	x1
2	Bottom Board	x1	12	Back Drawer	x1
3	Side Board Left	x1	13	Bottom Drawer	x1
4	Side Board Right	x1	14	Back Board	x1
5	Fixed Shelf	x1			
6	Assembly Leg	x2			
7	Bottom Skirt 1	x2			
8	Bottom Skirt 2	x2			
9	Front Drawer	x1			
10	Side Drawer Left	x1			

HARDWARE

- E** Wood Dowel Ø6 x 30 mm x2
- P** Cam Bolt Ø6 x 32 mm x4


COMPONENTS

- 9** Front Drawer x1
- 10** Side Drawer Left x1
- 11** Side Drawer Right x1

1.1 Insert Cam Bolt Ø6 x 32 mm (P) into the Front Drawer (9), then tighten using screwdriver.

1.2 Insert Wood Dowel Ø6 x 30 mm (E) into the Side Drawer Left (10).

1.3 Insert Wood Dowel Ø6 x 30 mm (E) into the Side Drawer Right (11).

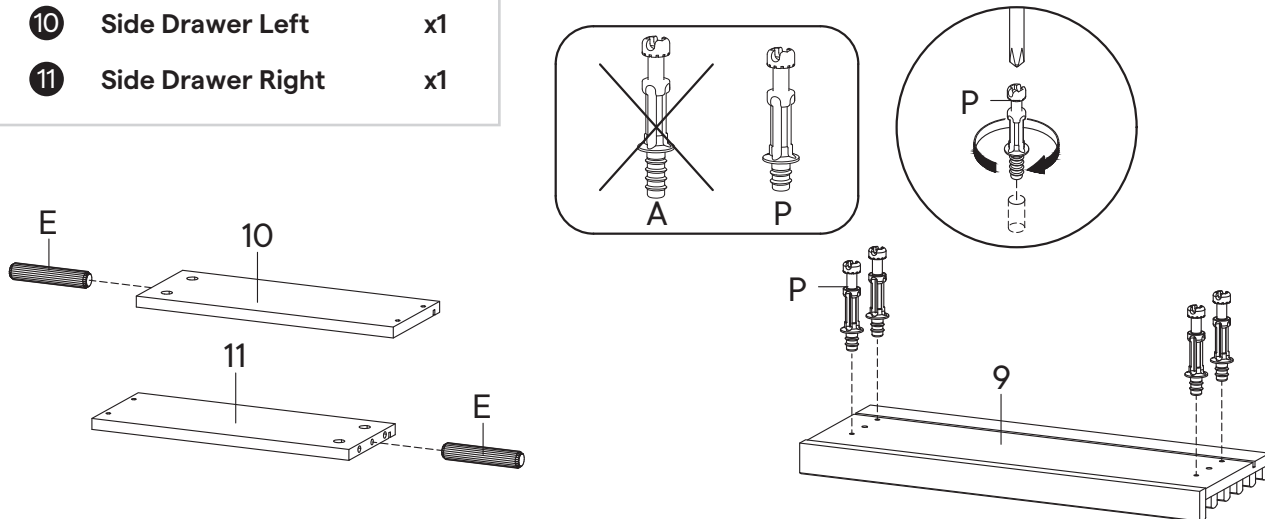

STEP 02

HARDWARE


- C** Cam Lock Ø12 mm x4
- J** Screw M 4 x 39 mm x4

COMPONENTS

- 9** Front Drawer x1
- 10** Side Drawer Left x1
- 11** Side Drawer Right x1
- 12** Back Drawer x1
- 13** Bottom Drawer x1

2.1 Combine Side Drawers (10&11) into Front Drawer (9) secure with Cam Lock Ø12 mm (C) then tighten using screwdriver.

2.2 Insert Bottom Drawer (13), into Front Drawer with laminated face facing upward. Insert Back Drawer (12) secure with Screw M 4 x 39 mm (J) tighten using screwdriver, as shown in the picture.

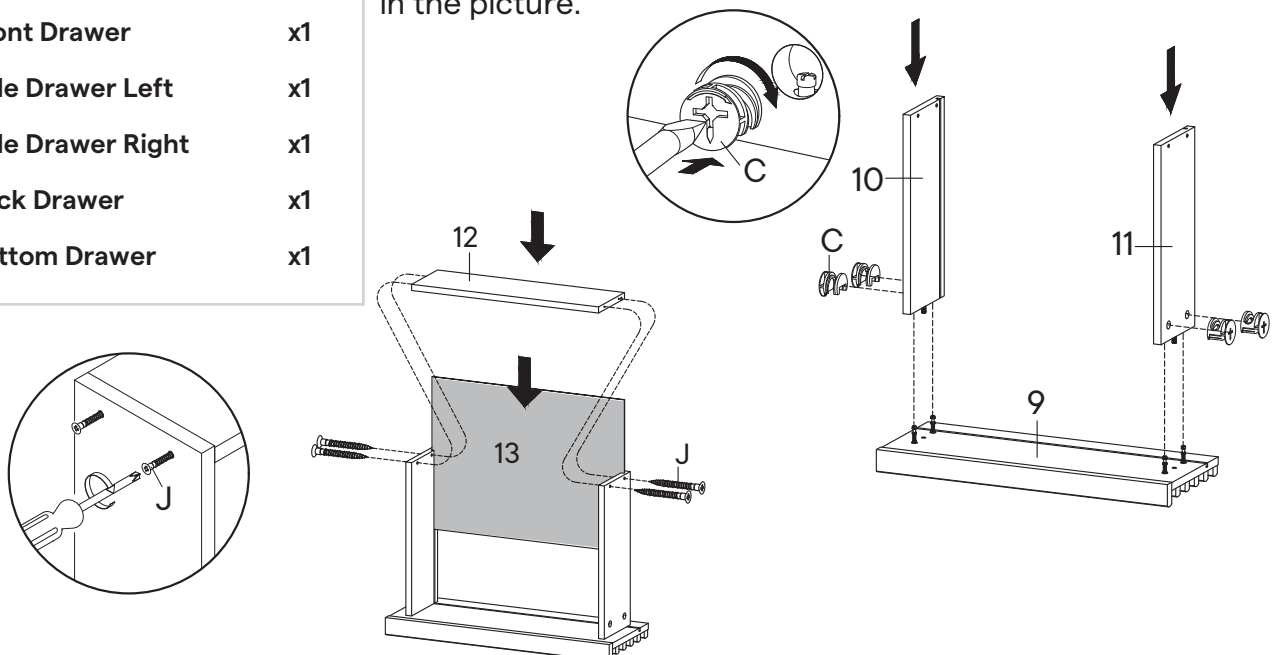


HARDWARE

I	Screw M 3.5 x 13 mm	x6
M	Wedge	x4
N	Screw M 3.5 x 15.5 mm	x4
RM30A	Drawer Runner	x1

3.1 Install the Drawer Runner (RM30A) into position as shown in picture. Secure with screws M 3.5 x 13 mm (I), then tighten using screwdriver.

3.2 Insert the Wedge (M) and Screw M 3.5 x 15.5 mm (N) into the bottom of the drawer then tighten the screw using screwdriver and the position according to the picture.

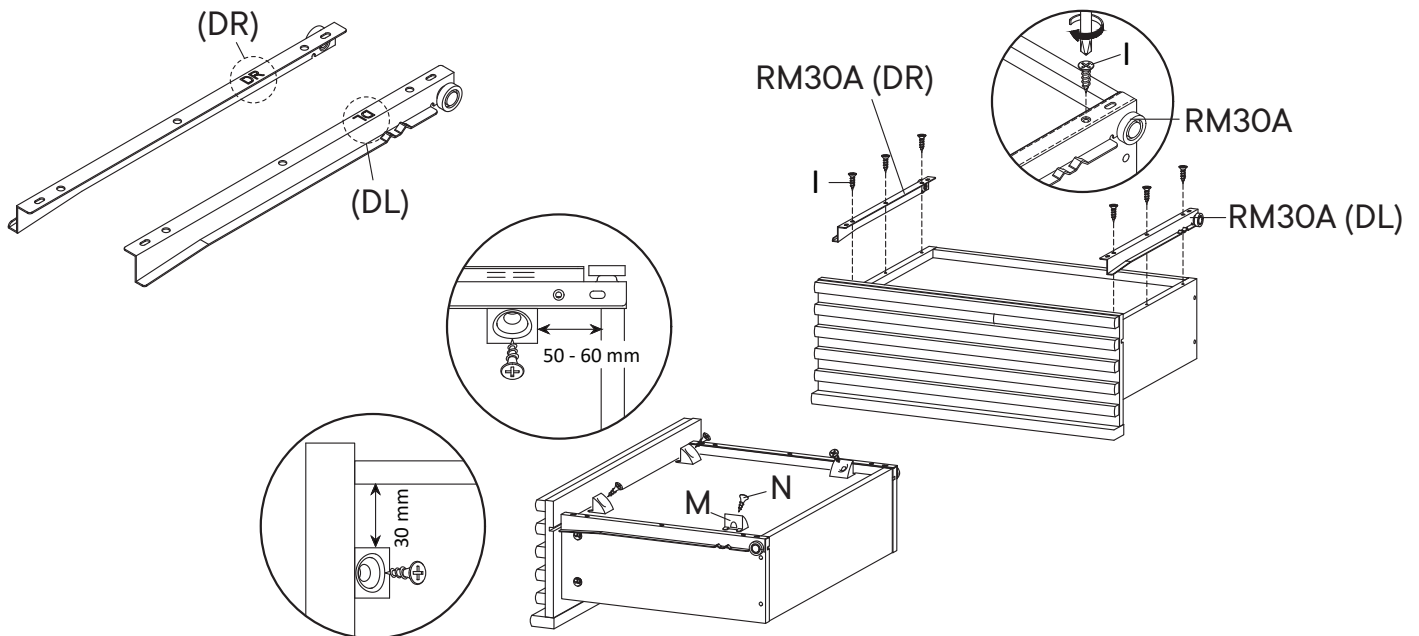

STEP 04

HARDWARE


A	Cam Bolt $\varnothing 6$ x 35 mm	x4
D	Wood Dowel $\varnothing 8$ x 30 mm	x4

COMPONENTS

1	Top Board	x1
5	Fixed Shelf	x1

4.1 Insert Cam Bolt $\varnothing 6$ x 35 mm (A) into the Top Board (1), then tighten using screwdriver.

4.2 Insert Wood Dowel $\varnothing 8$ x 30 mm (D) into the Fixed Shelf (5).

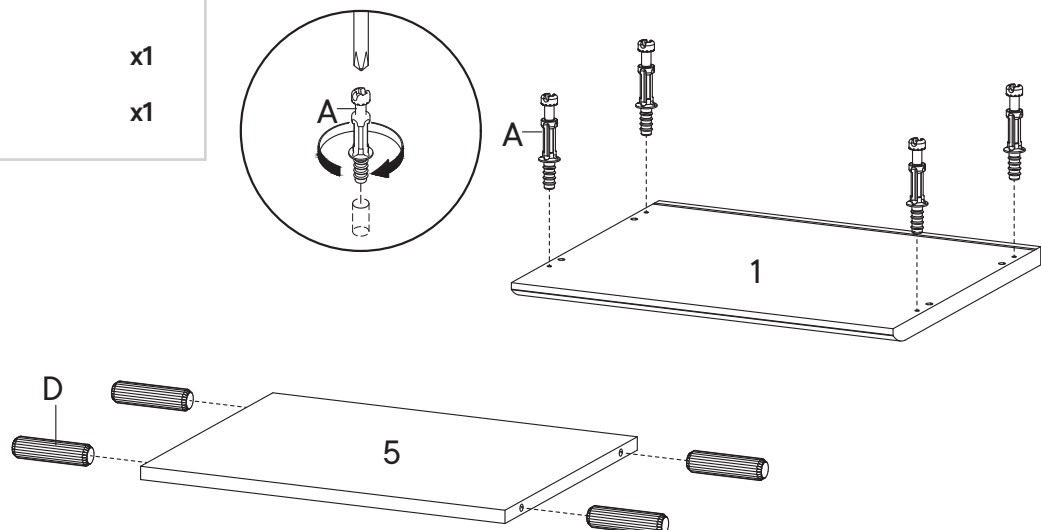

HARDWARE



- D** Wood Dowel Ø8 x 30 mm x8
- H** Screw M 6 x 10.5 mm x4
- RM30A** Drawer Runner x1

COMPONENTS

- 3** Side Board Left x1
- 4** Side Board Right x1

5.1 Securing part of the Drawer Runner (RM30A) (CL) into Side Board Left (3) secure with screw M 6 x 10.5 mm (H) then tighten screw using screwdriver. Ensure the position as the above details.

5.2 Securing part of the Drawer Runner (RM30A) (CR) into Side Board Right (4) secure with screw M 6 x 10.5 mm (H) then tighten screw using screwdriver. Ensure the position as the above details.

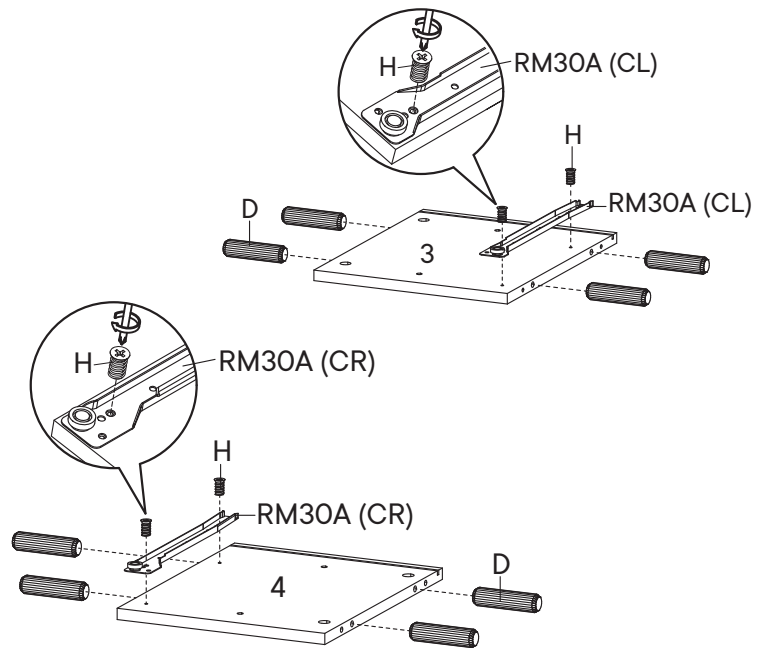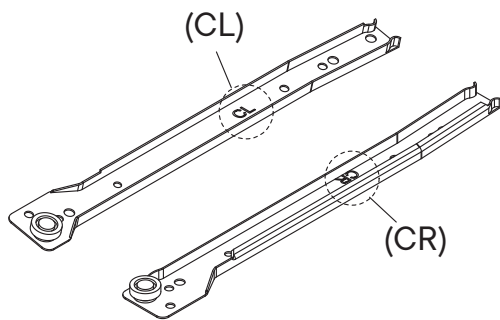


STEP 06

COMPONENTS

- 3** Side Board Left x1
- 4** Side Board Right x1
- 5** Fixed Shelf x1

6.1 Attach the Side Board Left (3) and Side Board Right (4) to the Fixed Shelf (5) component. Position as shown in the figure.

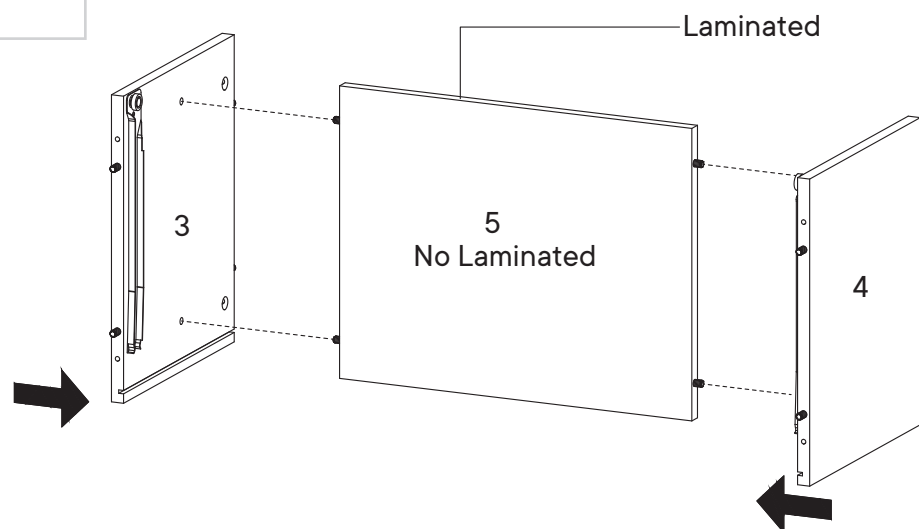



HARDWARE

- B** Cam Lock Ø15 mm x4
- O** Screw Cap Ø15 mm x4

COMPONENTS

- 1** Top Board x1

7.1 Insert Top Board (1) and secure with Cam Lock Ø15 mm (B) then tighten using screwdriver. Put Screw Cap (O) over the Cam lock on Side Boards. Position as shown in the figure.

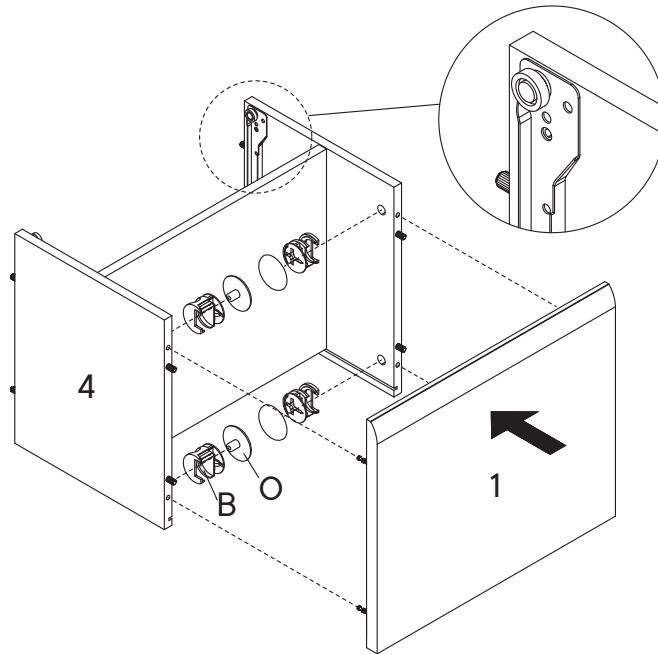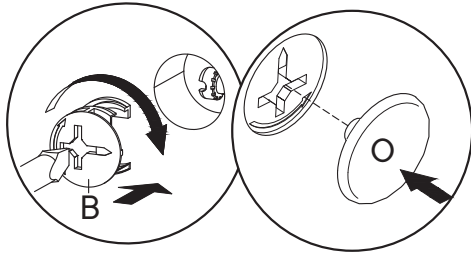

STEP 08

HARDWARE



- F** Screw M 7 x 50 mm x4
- G** Allen Key x1

COMPONENTS

- 2** Bottom Board x1
- 14** Back Board x1

8.1 Insert Back Board (14) into Top Board. Position as shown in the figure.

8.2 Insert Bottom Board (2) and secure with Screw M 7 x 50 mm (F), tighten screws using Allen Key (G).

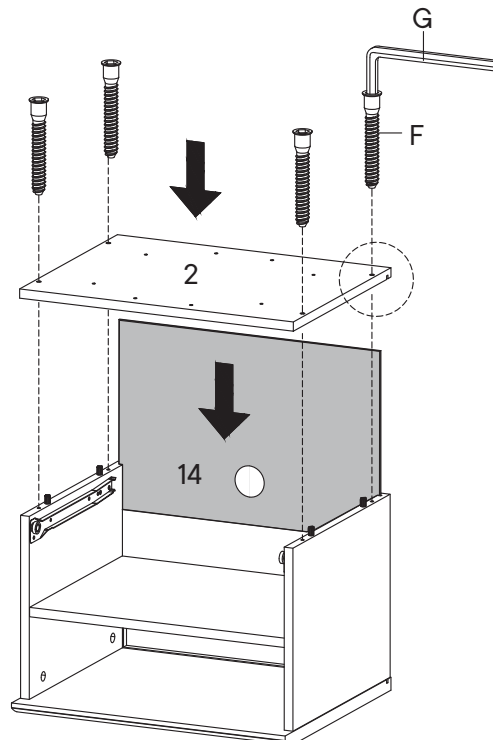

HARDWARE

- A** Cam Bolt Ø6 x 35 mm x4
- D** Wood Dowel Ø8 x 30 mm x16


COMPONENTS

- 6** Assembly Leg x2
- 7** Bottom Skirt 1 x2
- 8** Bottom Skirt 2 x2

9.1 Insert Cam Bolt Ø6 x 35 mm (A) into the Assembly Leg (6), then tighten using screwdriver.

9.2 Insert Wood Dowel Ø8 x 30 mm (D) into the Bottom Skirt 1 (7).

9.2 Insert Wood Dowel Ø8 x 30 mm (D) into the Bottom Skirt 2 (8).

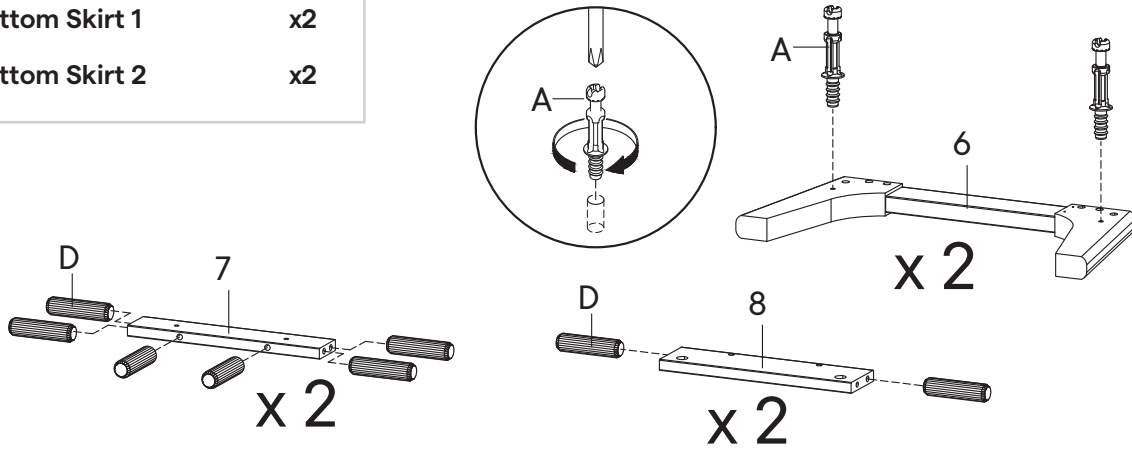

STEP 10

HARDWARE




- B** Cam Lock Ø15 mm x4

COMPONENTS

- 6** Assembly Leg x2
- 7** Bottom Skirt 1 x2
- 8** Bottom Skirt 2 x2

10.1 Combine Bottom Skirt 1 (7) and Bottom Skirt 2 (8) according to picture. Position as shown in the figure.


10.2 Combine Assembly Leg (6) with Pre - Assembled of Bottom Skirt according to picture. Secure with Cam Lock Ø15 mm (B) then tighten using screwdriver. Position as shown in the figure.

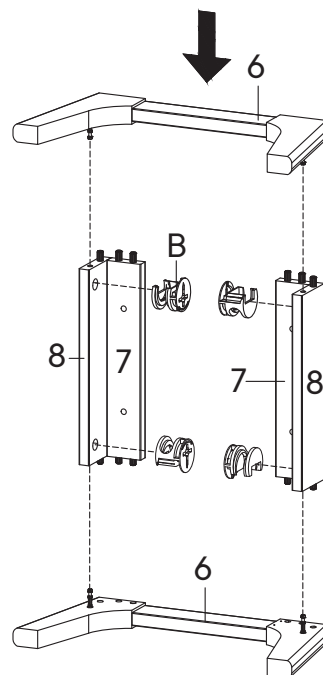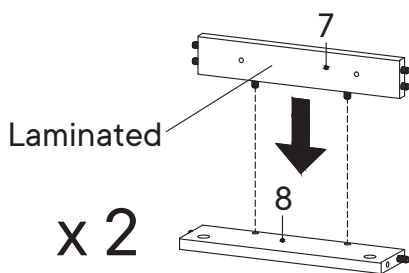

HARDWARE

- D** Wood Dowel Ø8 x 30 mm x4

11.1 Insert Wood Dowel Ø8 x 30 mm (D) into Assembly Leg from Previous step. Position as shown in the figure.

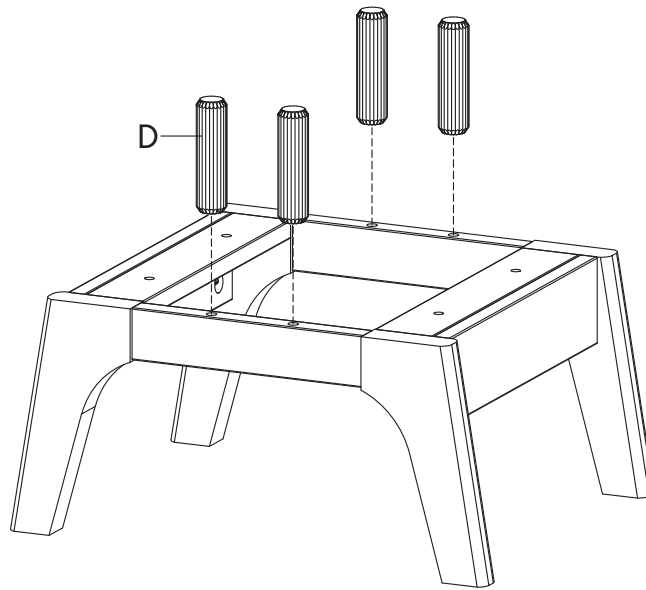


STEP 12

HARDWARE



- G** Allen Key x1
K Screw M 6.4 x 25 mm x4
L Floor Protector x4

12.1 Attach Assembly Leg from previous step into Bottom Board secure with Screw M 6.4 x 25 mm (K), tighten screws using Allen Key (G).

12.2 Peel off the paper from the Floor Protector (L) and stick it onto the Assembly Leg.

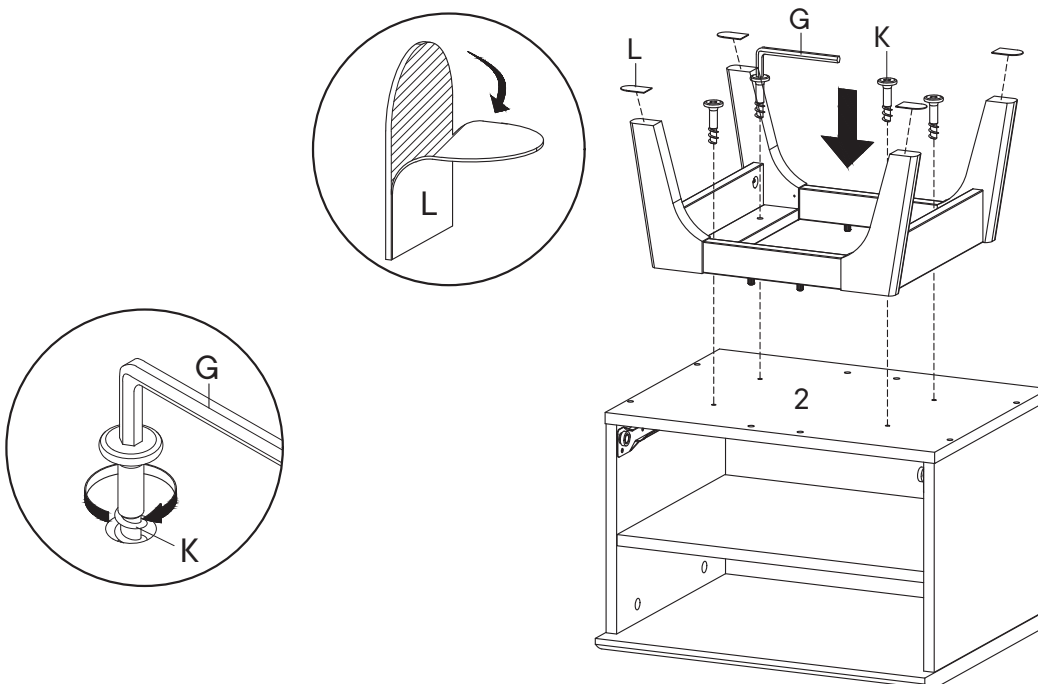

13.1 Hold the sides of drawer, position the wheel of rail at drawer back and the wheel of rail at side boards, according to the image. Slide in the drawers one by one into the Nightstand.

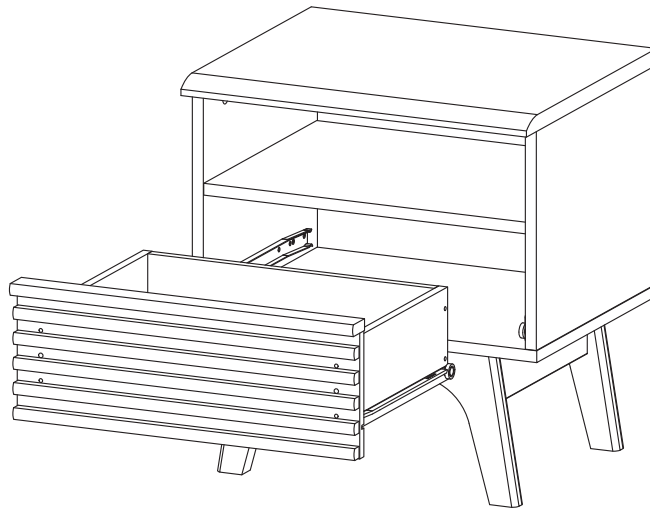
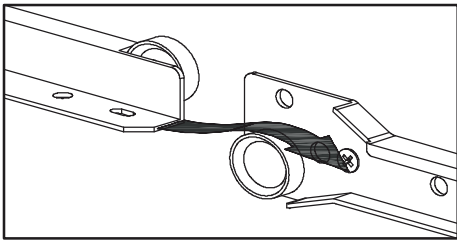


STEP 14

HARDWARE

- | | | |
|----------|-----------------------|----|
| M | Wedge | x4 |
| N | Screw M 3.5 x 15.5 mm | x4 |

14.1 Use the Wedge (M) and Screw M 3.5 x 15.5 mm (N) to tighten the back of the night stand using screwdriver. Before securing the wedges (M), ensure that the top board and bottom board are aligned at a 90° angle against the night stand.

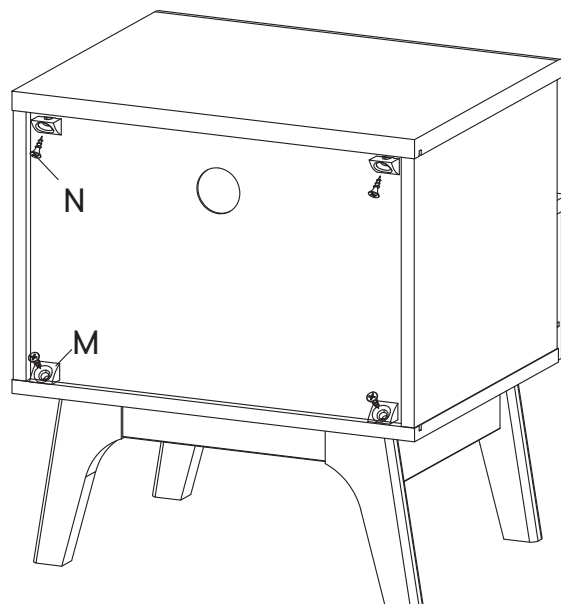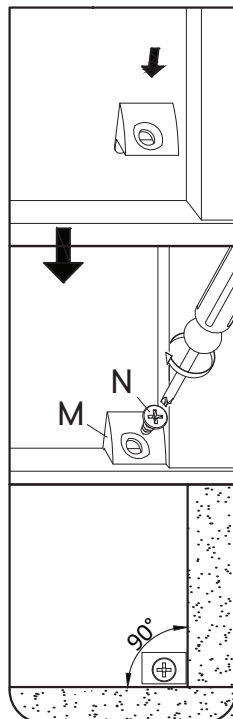


Great job!

Night Stand assembly is complete

CARING FOR YOUR ITEM

- Indoor use only.
- Not contract grade.
- Clean using a non-abrasive cloth and a mild cleaner.
- Never use harsh chemicals, as they could damage the finish or integrity of the item.

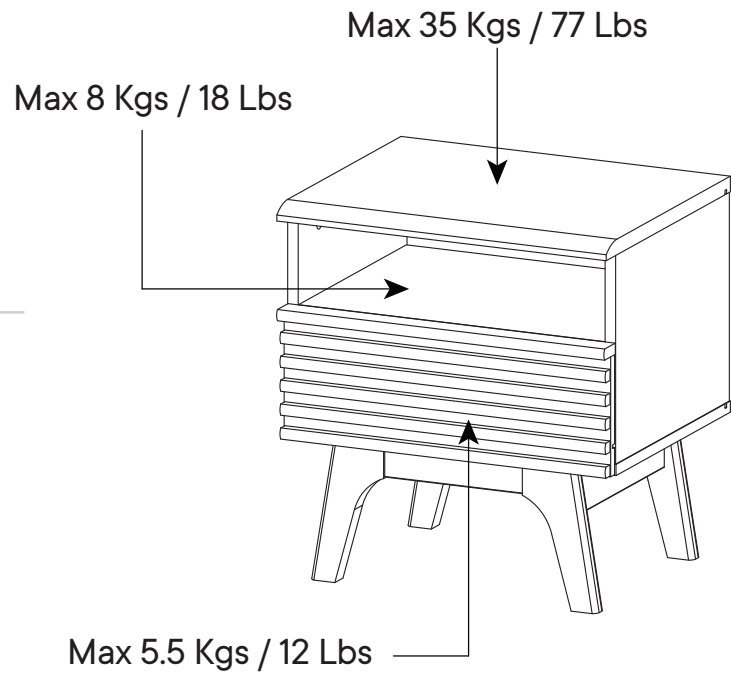

CONNECT WITH US!

Tag us [@modway_furniture](#) and [#modway](#) for a chance to be featured.

modway



Questions? Contact us!
609.256.9000
cs@modway.com