

























ASSEMBLY INSTRUCTIONS

(For LD1031ASF-52)

ATTENTION:

1. Please read these instructions carefully before assembly.
2. Aluminum is soft metal over tighten may strip threads or break the part.
3. DO NOT use power tools.
4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

Parts list	Parts picture	Description	Q'ty	Parts list	Parts picture	Description	Q'ty
A		Table top	1	E	 (M8*30)	Bolt	4
B		Door	1	F	 (M8)	Big flat washer	4
C		Side panel	2	G	 (M8)	Big lock washer	4
D		Back panel	1	H	 (M8)	Big nut	4
Q		Tank ring	1	I		Nut cap	4
R		Basin cover	1	J	 (M6*25)	Bolt	1
S		Cross stretcher	1	K	 (M6*20)	Bolt	8
U		Gas grill basin	1	T		PVC washer	1
V		Black glass beads (10KG)	1	L	 (M6)	Small flat washer	9
Q		Foot leveler	Factory already assembled	M	 (M6)	Small lock washer	8
W		Umbrella ring	1	N		PVC cover	8
				O		Wrench	1
				P		Wrench	1

Made in China

* DO NOT OVER TIGHTEN

* NO POWER TOOLS

* NO SOCKET DRIVERS




ASSEMBLY INSTRUCTIONS

(For LD1031ASF-52)

Assembly steps:

1. Loosely attach the Side panel (C) to the table top(A) with bolts(E),big flat washers(F),lock washers(G),nuts(H) and nut caps(I).DO NOT over-tighten.Loosely attach the Back panel (D) to the Side panel (C) with small flat washers (L),small lock washers(M),bolts(K) and PVC covers(N).
2. Loosely attach the door(B) to the Foot box(C)with PVC washer(T), small flat washers(L) and bolt(J).Tighten all the bolts and nuts completely.
3. Loosely attach the Cross stretcher(S) to the Side panel(C) with small flat washers(L),small lock washers(M),bolts(K) and PVC covers(N).
4. Loosely attach the Tank ring (Q) to the door(B) with small flat washers(L),small lock washers(M),bolts(K) and PVC covers(N).Tighten all the bolts completely.
5. Turn the table as needed upright and put Basin cover(R) on the table top. Use the levelers to adjust the table.
6. Loosely attach the gas grill basin(U) on the table. Connect the tank with gas grill basin(U).Resistance to black glass beads(V) is poured into the gas grill basin(U).Note: volcano out of the crater can not cover off ! Finally ,open the gas grill basin appear to fire just fine.

Warning : DO NOT use acid or alkaline washing liquid to clean the product.

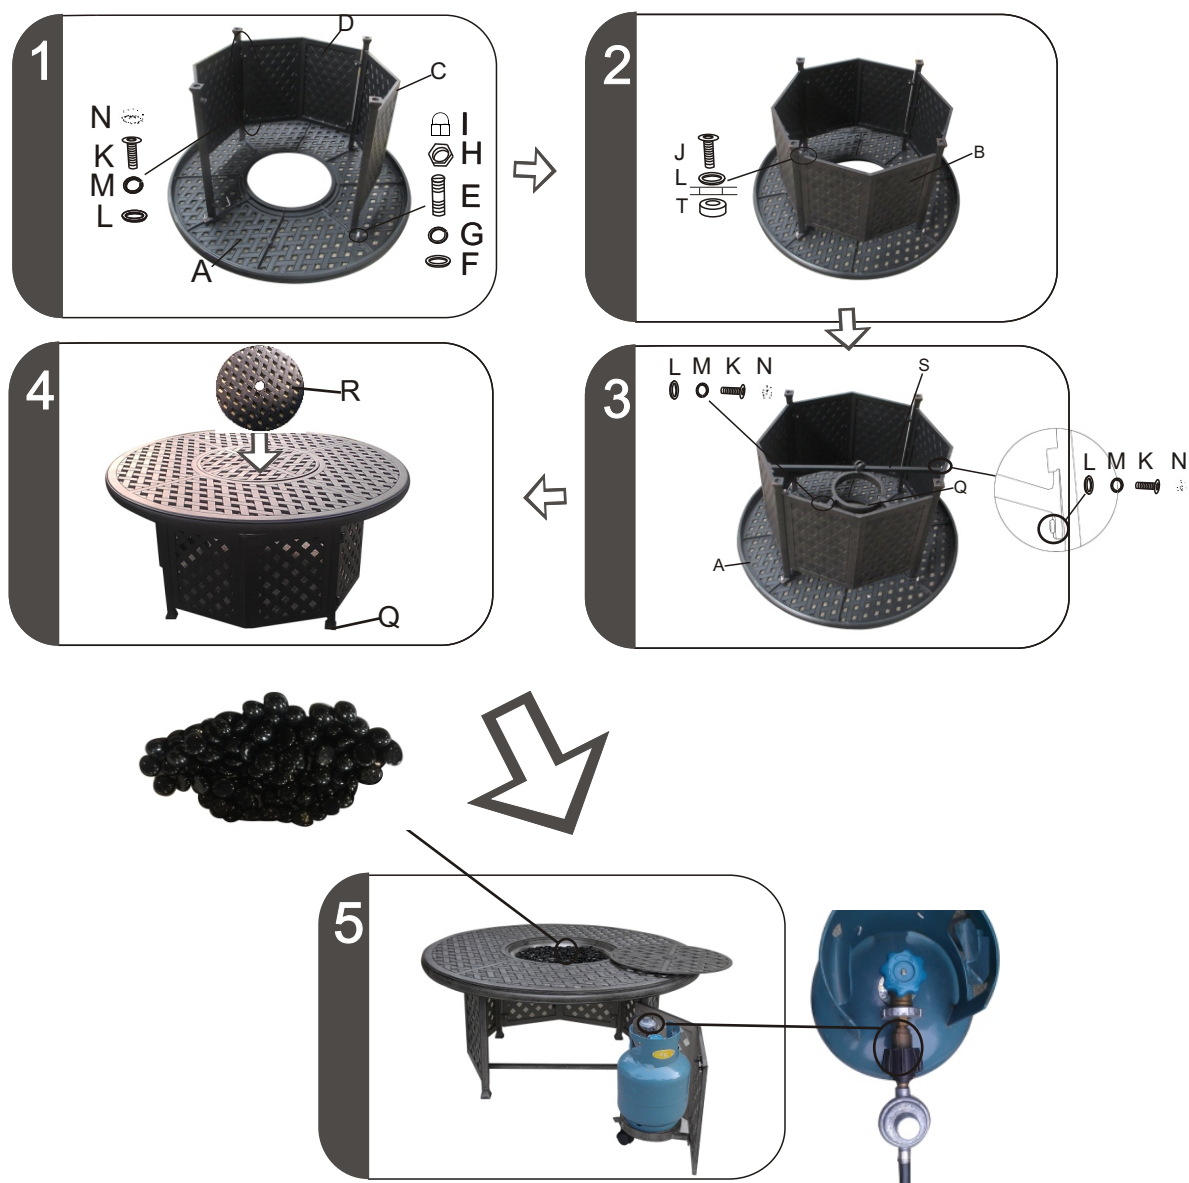

* DO NOT OVER TIGHTEN

* NO POWER TOOLS

* NO SOCKET DRIVERS

