



ASSEMBLY INSTRUCTIONS

Nightstand

MOD-7237 / V0.05.08.25

modway



Questions? Contact us!

609.256.9000

cs@modway.com

Welcome.

Let's get started.

Before you begin, here are some things to keep in mind:

Assembly will take most people **about 60 minutes**. Consider having a friend help you!

Only use hand tools to assemble this item
Do not use power tools. Do not tighten bolts or screws completely until all hardware is lined up and inserted into the holes.

Read through all of the instructions before starting. Make sure you have all parts and components before discarding any packing materials.

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Assemble your item on a flat, carpeted area, with plenty of space to work. This will prevent damage and scratches to your floors or the item while you're assembling the product.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.




















Care instructions are listed in the last step of this manual.

WAIT!

Missing parts or hardware? Need assistance?
Contact us before returning your item.
We're here to help!



HARDWARE INCLUDED IN THE BOX:

A		Cam Bolt Ø6 x 35 mm	x30
B		Cam Lock Ø15 mm	x18
C		Cam Lock Ø12 mm	x12
D		Wood Dowel Ø8 x 30 mm	x22
E		Wood Dowel Ø6 x 30 mm	x8
F		Screw M 7 x 50 mm	x6
G		Screw M 6 x 10.5 mm	x8
H		Screw M 4 x 39 mm	x8
I		Screw M 4.5 x 12.5 mm	x8
J		Screw M 3.5 x 13 mm	x12
K		Bracket	x2
L		Screw Cap Ø15 mm	x8
M		Allen Key	x2
N		Screw M 3.5 x 15.5 mm	x8
O		Wedge	x8
P		List	x2
Q		Screw M 4 x 20 mm	x4
R		Handle	x2
RM35A		Drawer Runner	x2

WHAT YOU NEED:




Phillips



Phillips Head Screwdriver

FURNITURE COMPONENTS INCLUDED IN THE BOX:

All parts are numbered with a sticker according to this list.

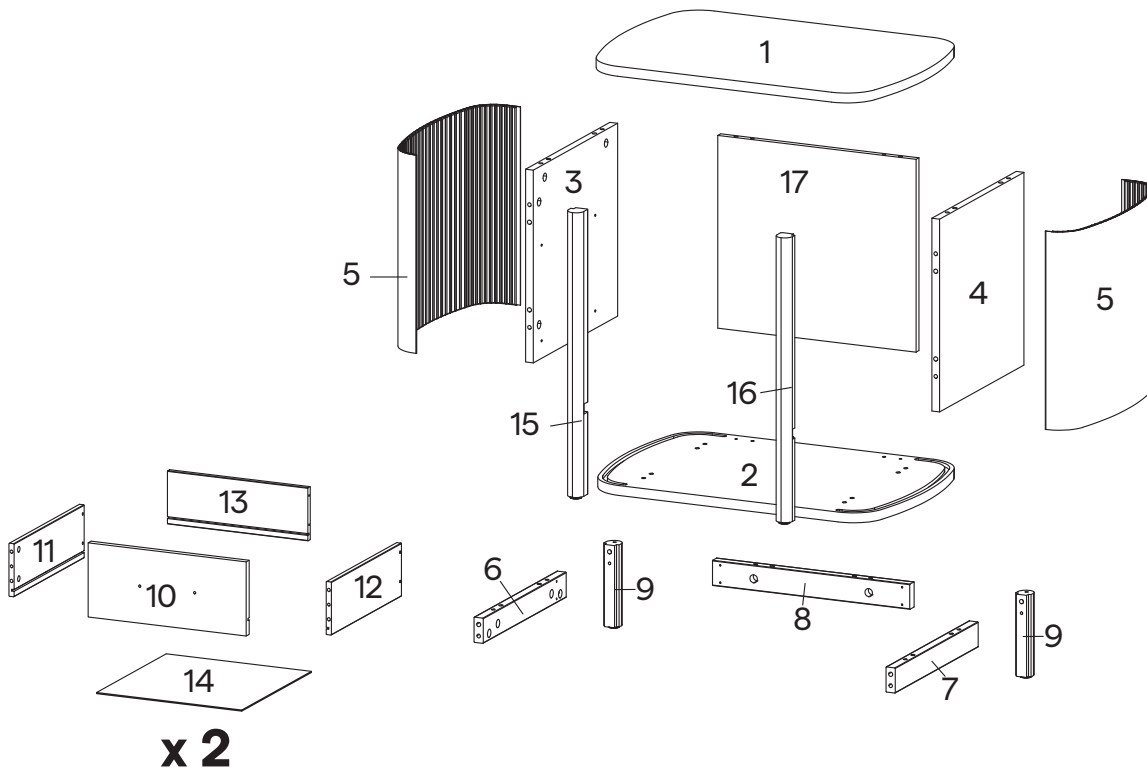

1	Top Board	x1	7	Bottom Skirt 2	x1	13	Back Drawer	x2
2	Bottom Board	x1	8	Bottom Skirt 3	x1	14	Bottom Drawer	x2
3	Center Board Left	x1	9	Back Leg	x2	15	Front Leg Left	x1
4	Center Board Right	x1	10	Front Drawer	x2	16	Front Leg Right	x1
5	Bar Side	x2	11	Side Drawer Left	x2	17	Back Board	x1
6	Bottom Skirt 1	x1	12	Side Drawer Right	x2			

HARDWARE

- A** Cam Bolt Ø6 x 35 mm x8
- E** Wood Dowel Ø6 x 30 mm x4


COMPONENTS

- 10** Front Drawer x2
- 11** Side Drawer Left x2
- 12** Side Drawer Right x2

1.1 Insert Cam Bolt Ø6 x 35 mm (A) into the Front Drawer (10), then tighten using screwdriver.

1.2 Insert Wood Dowel Ø6 x 30 mm (E) into the Side Drawer Left (11).

1.3 Insert Wood Dowel Ø6 x 30 mm (E) into the Side Drawer Right (12).

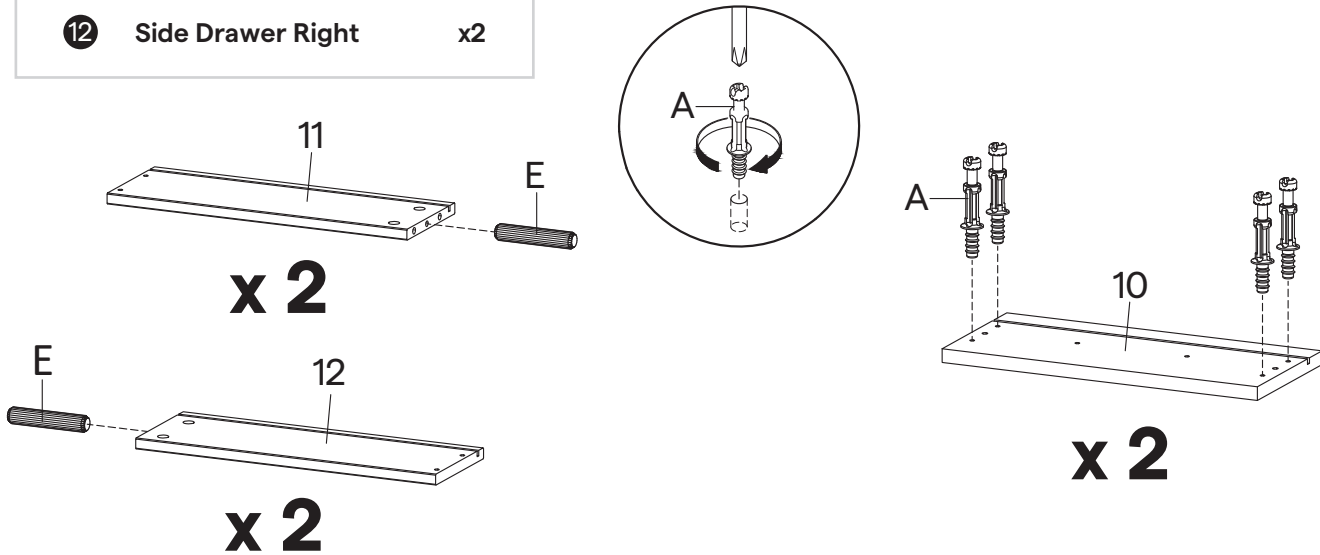

STEP 02

HARDWARE


- C** Cam Lock Ø12 mm x8

COMPONENTS

- 10** Front Drawer x2
- 11** Side Drawer Left x2
- 12** Side Drawer Right x2
- 14** Bottom Drawer x2

2.1 Combine Side Drawers (11&12) into Front Drawer (10) secure with Cam Lock Ø12 mm (C) then tighten using screwdriver.

2.2 Insert Bottom Drawer (14), into Front Drawer with laminated face facing upward.

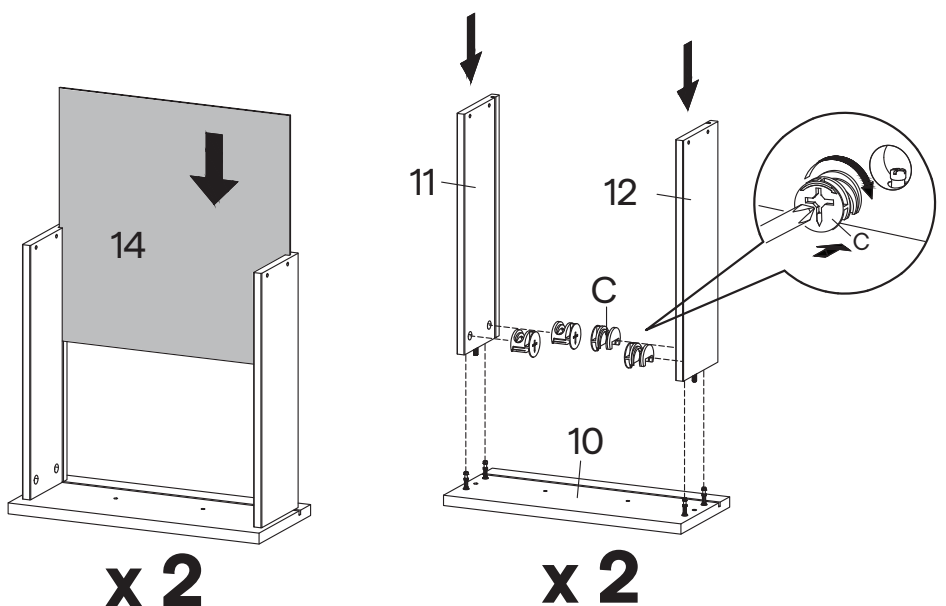

HARDWARE





- H** Screw M 4 x 39 mm x8
- Q** Screw M 4 x 20 mm x4
- R** Handle x2

COMPONENTS

- 13** Back Drawer x2

3.1 Combine Back Drawer (13) secure with Screw M 4 x 39 mm (H) tighten using screwdriver, as shown in the picture.

3.2 Install the Handle (R) into the Front Drawer and secure with Screw M 4 x 20 mm (Q), then tighten using screwdriver.

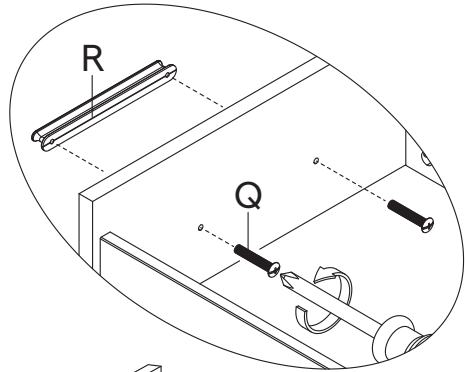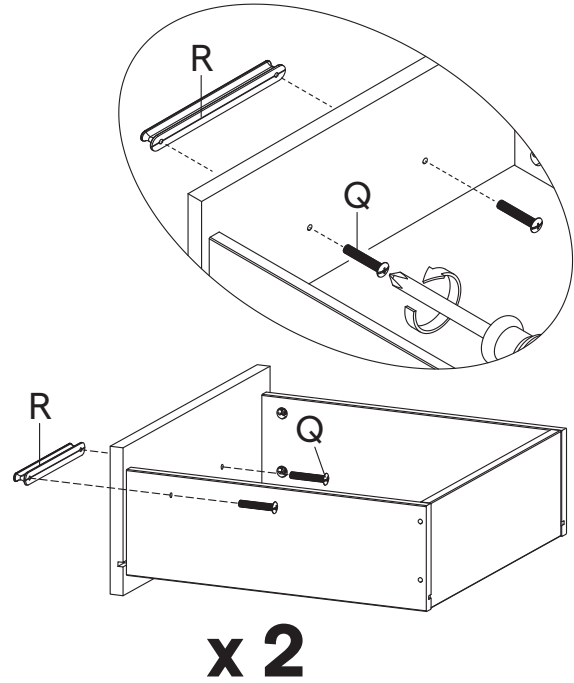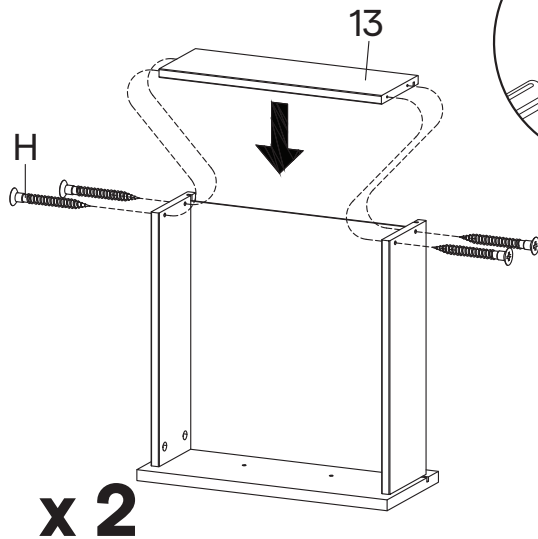




STEP 04

HARDWARE

- J** Screw M 3.5 x 13 mm x12
- N** Screw M 3.5 x 15.5 mm x8
- O** Wedge x8
- RM35A** Drawer Runner x2

4.1 Install the Drawer Runner (RM35A) into position as shown in picture. Secure with screws M 3.5 x 13 mm (J), then tighten using screwdriver.

4.2 Insert the Wedge (O) into the Bottom of the drawer and insert the Screw M 3.5 x 15.5 mm (N), then tighten using screwdriver.

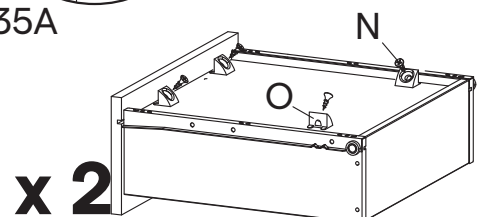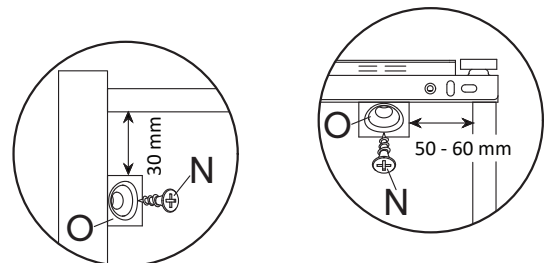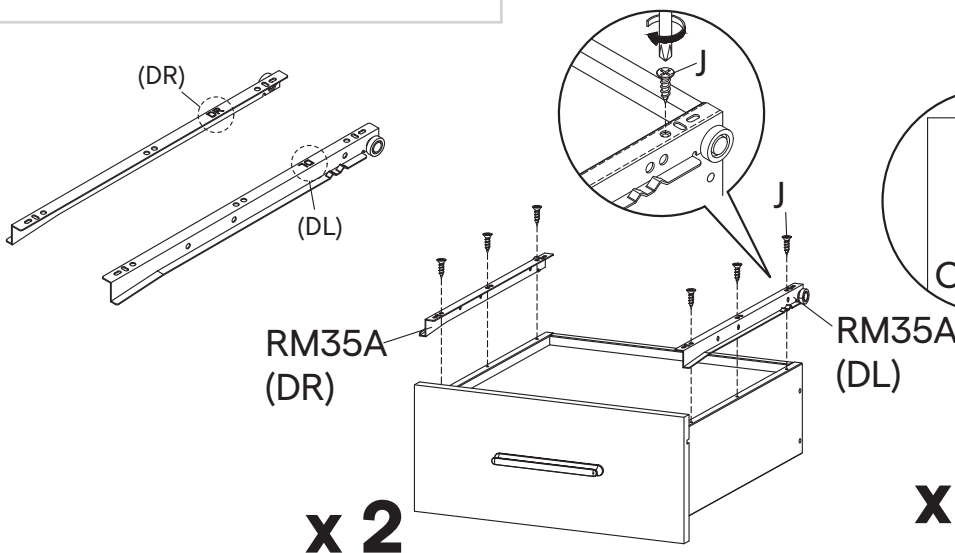

HARDWARE


- D** Wood Dowel Ø8 x 30 mm x12
- G** Screw M 6 x 10.5 mm x8
- RM35A** Drawer Runner x2

COMPONENTS

- 3** Center Board Left x1
- 4** Center Board Right x1

5.1 Securing part of the Drawer Runner (RM35A) (CL) into Center Board Left (3) to position as the below detail, insert Screw M 6 x 10.5 mm (G) then tighten using screwdriver, and insert Wood Dowel Ø8 x 30 mm (D) position as shown in the picture.

5.2 Securing part of the Drawer Runner (RM35A) (CR) into Center Board Right (4) to position as the below detail, insert Screw M 6 x 10.5 mm (G) then tighten using screwdriver, and insert Wood Dowel Ø8 x 30 mm (D) position as shown in the picture.

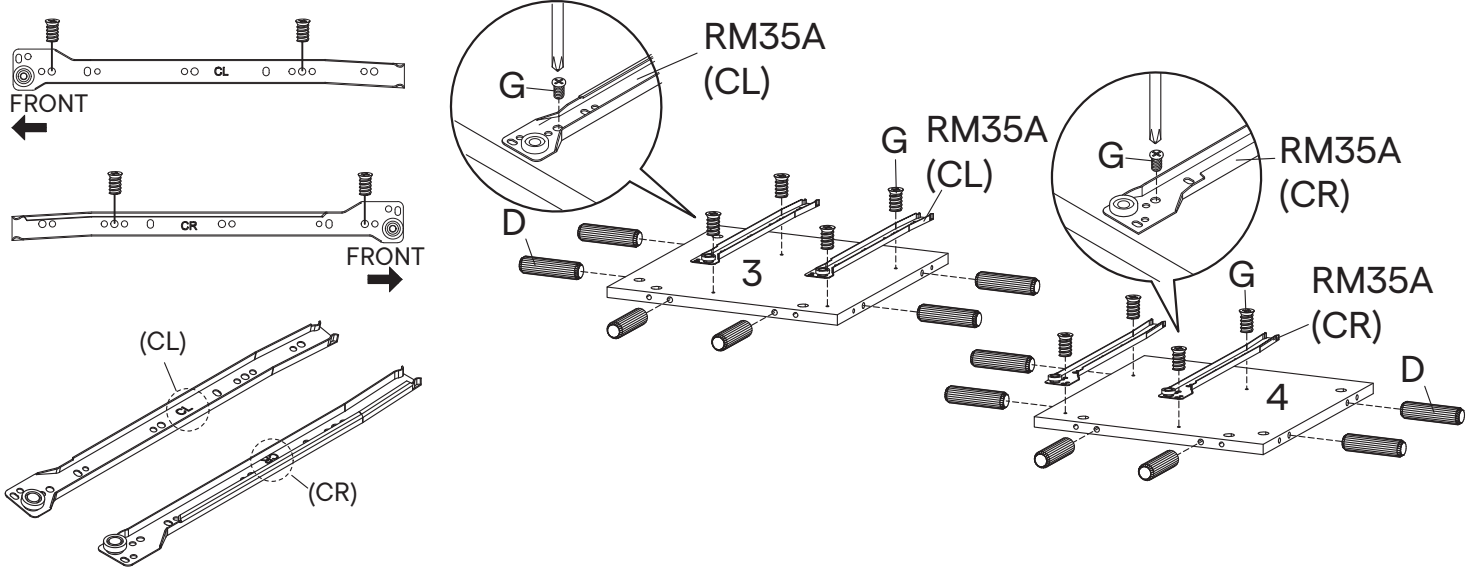

STEP 06



HARDWARE

- F** Screw M 7 x 50 mm x4
- M** Allen Key x1

COMPONENTS

- 2** Bottom Board x1



6.1 Combine Bottom Board (2) to Center Boards and secure with Screw M 7 x 50 mm (F), tighten screws using Allen Key (M). Make sure the hole of Bottom Board component position as shown in the picture.

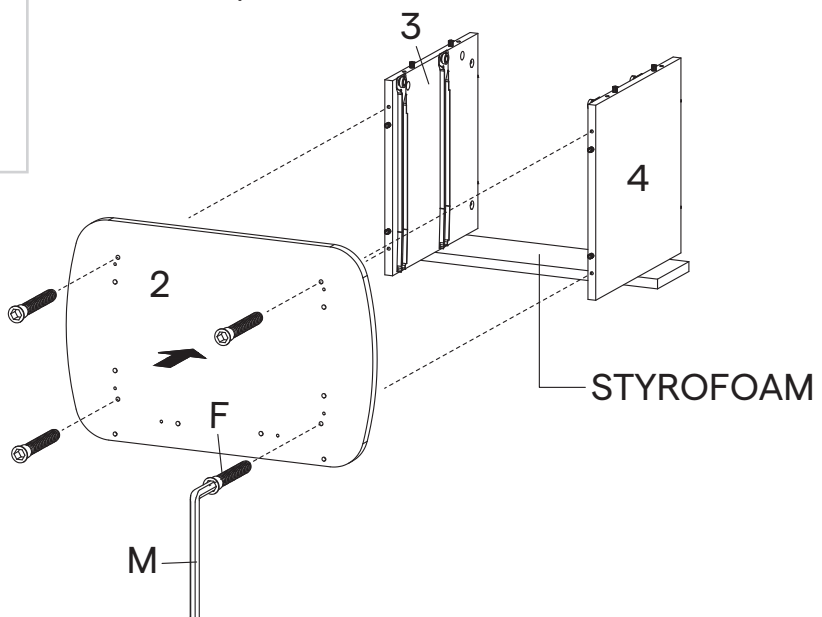

HARDWARE

A Cam Bolt Ø6 x 35 mm x6

7.1 Insert Cam Bolt Ø6 x 35 mm (A) into the Bottom Board (2), then tighten using screwdriver.

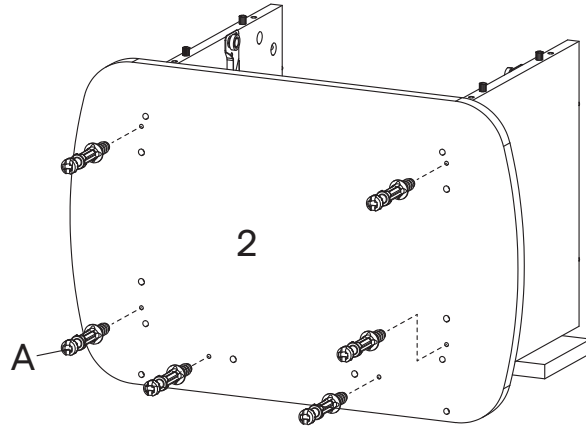

STEP 08

HARDWARE

A Cam Bolt Ø6 x 35 mm x2

D Wood Dowel Ø8 x 30 mm x10

COMPONENTS

6 Bottom Skirt 1 x1





7 Bottom Skirt 2 x1

8 Bottom Skirt 3 x1


9 Back Leg x2

8.1 Insert Wood Dowel Ø8 x 30 mm (D) into the Bottom Skirt 1 (6), Bottom Skirt 2 (7) and Bottom Skirt 3 (8).

8.2 Insert Cam Bolt Ø6 x 35 mm (A) into the Back Leg (9), then tighten using screwdriver.

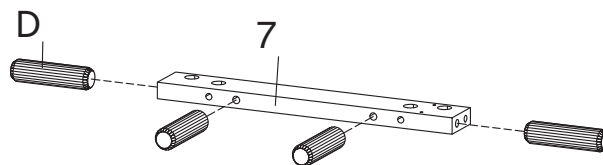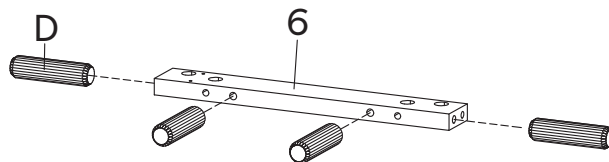

x 2



HARDWARE

B Cam Lock Ø15 mm x2

COMPONENTS


6 Bottom Skirt 1 x1

7 Bottom Skirt 2 x1

9 Back Leg x2

9.1 Combine Bottom Skirt 1 (6) and Back Leg (9) according to picture. Secure with Cam Lock Ø15 mm (B) then tighten using screwdriver. Position as shown in the figure.

9.2 Combine Bottom Skirt 2 (7) and Back Leg (9) according to picture. Secure with Cam Lock Ø15 mm (B) then tighten using screwdriver. Position as shown in the figure.

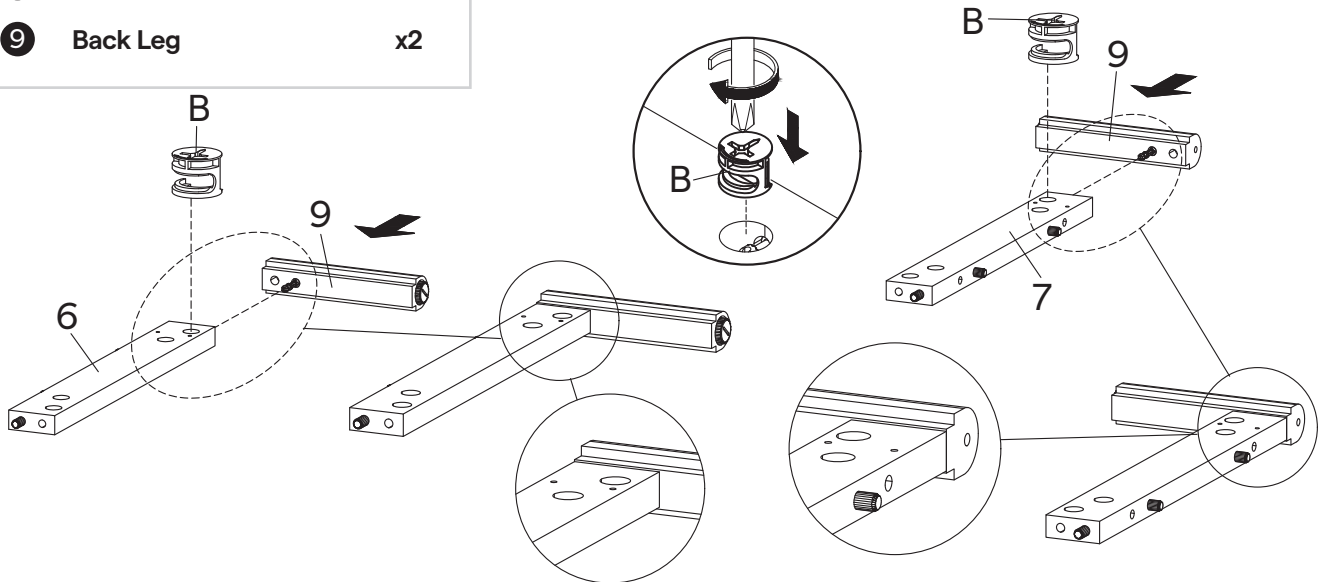

STEP 10


COMPONENTS

6 Bottom Skirt 1 x1

7 Bottom Skirt 2 x1

9 Back Leg x2

10.1 Combine Pre - Assembly of the Bottom Skirt to Bottom Board. Position as shown in the figure.

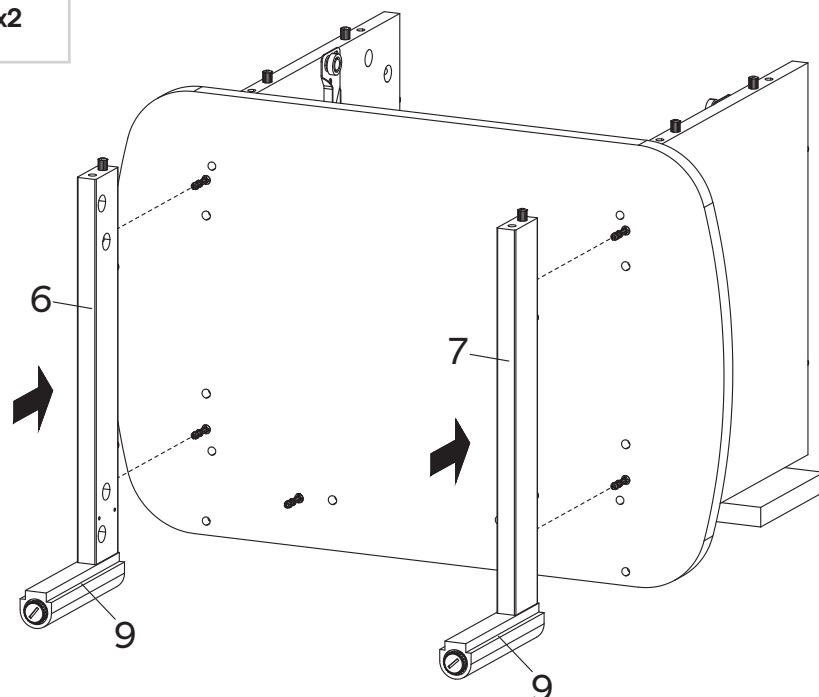

HARDWARE


- B** Cam Lock Ø15 mm x6
- L** Screw Cap Ø15 mm x6

COMPONENTS

- 8** Bottom Skirt 3 x1

11.1 Insert Bottom Skirt 3 (8) secure with Cam Lock Ø15 mm (B), then tighten using screwdriver. Put Screw Cap Ø15 mm (L) to the Cam Lock on Bottom Skirt 3 (8). Position as shown in the figure.

11.2 Then insert Cam Lock Ø15 mm (B), then tighten using screwdriver. Put Screw Cap Ø15 mm (L) to the Cam Lock on Bottom Skirts (1&2). Position as shown in the figure.


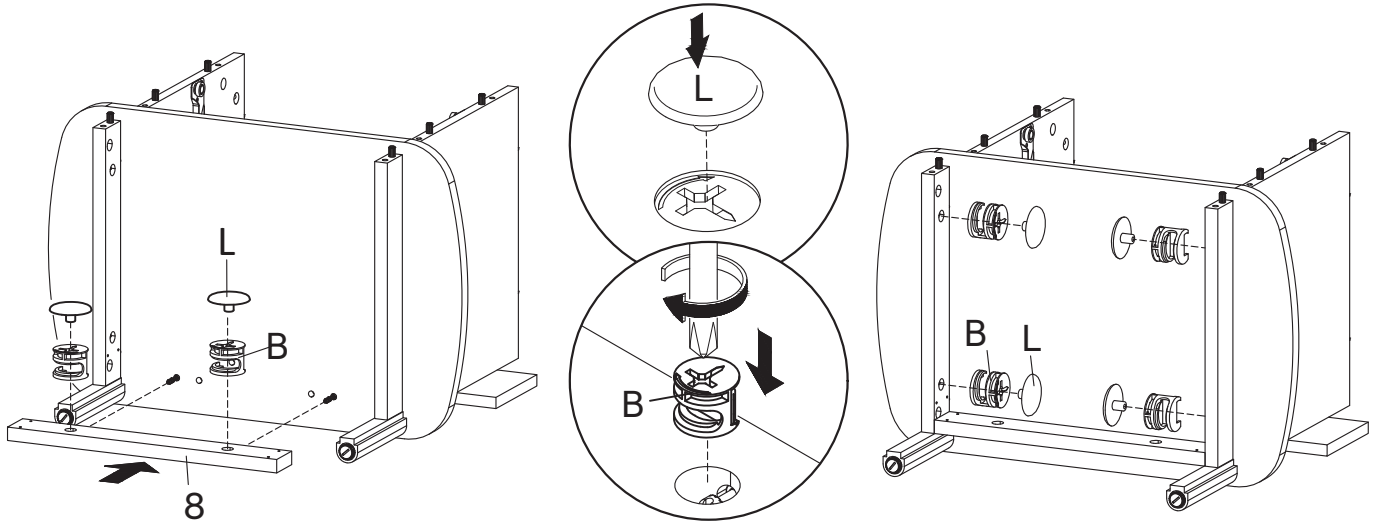


STEP 12

HARDWARE

- I** Screw M 4.5 x 12.5 mm x8
- K** Bracket x2

12.1 Install Bracket (K) into the Bottom Skirts and secure with Screw M 4.5 x 12.5 mm (I) using screwdriver. Position as shown in the figure.

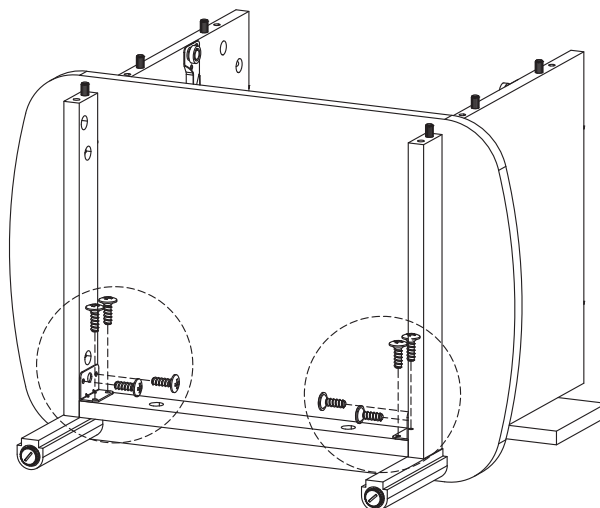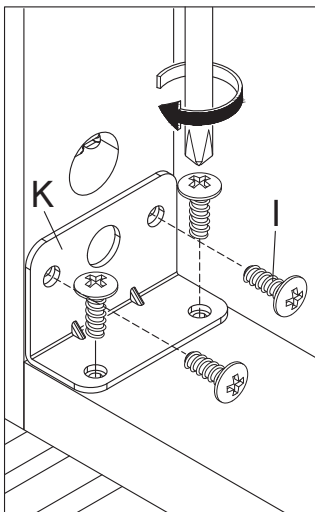

HARDWARE


- A** Cam Bolt Ø6 x 35 mm x6
- E** Wood Dowel Ø6 x 30 mm x4

COMPONENTS

- 15** Front Leg Left x1
- 16** Front Leg Right x1
- 17** Back Board x1

13.1 Insert Cam Bolt Ø6 x 35 mm (A) into the Front Leg Left (15) and Front Leg Right (16), then tighten using screwdriver.

13.2 Insert Wood Dowel Ø6 x 30 mm (E) into the Back Board (17).

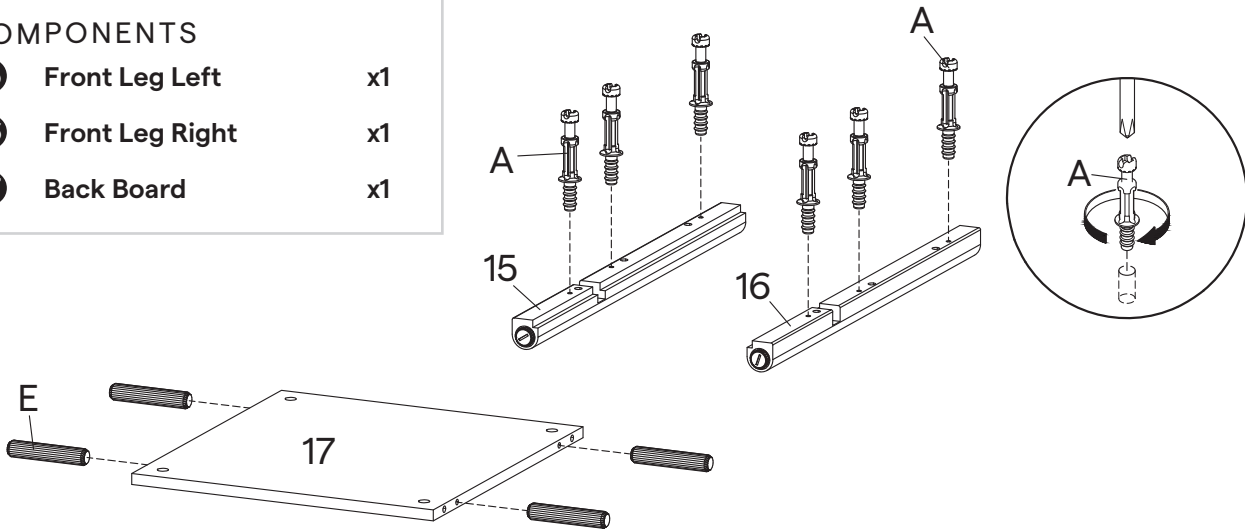

STEP 14


HARDWARE

- B** Cam Lock Ø15 mm x6
- L** Screw Cap Ø15 mm x2

COMPONENTS

- 15** Front Leg Left x1
- 16** Front Leg Right x1



14.1 Combine Front Leg Left and Right (15&16) to component Center Board and Bottom Skirt, secure with Cam Lock Ø15 mm (B), then tighten using screwdriver, put Screw Cap Ø15 mm (L) to the Cam Lock on Bottom Skirts. Position as shown in the figure.

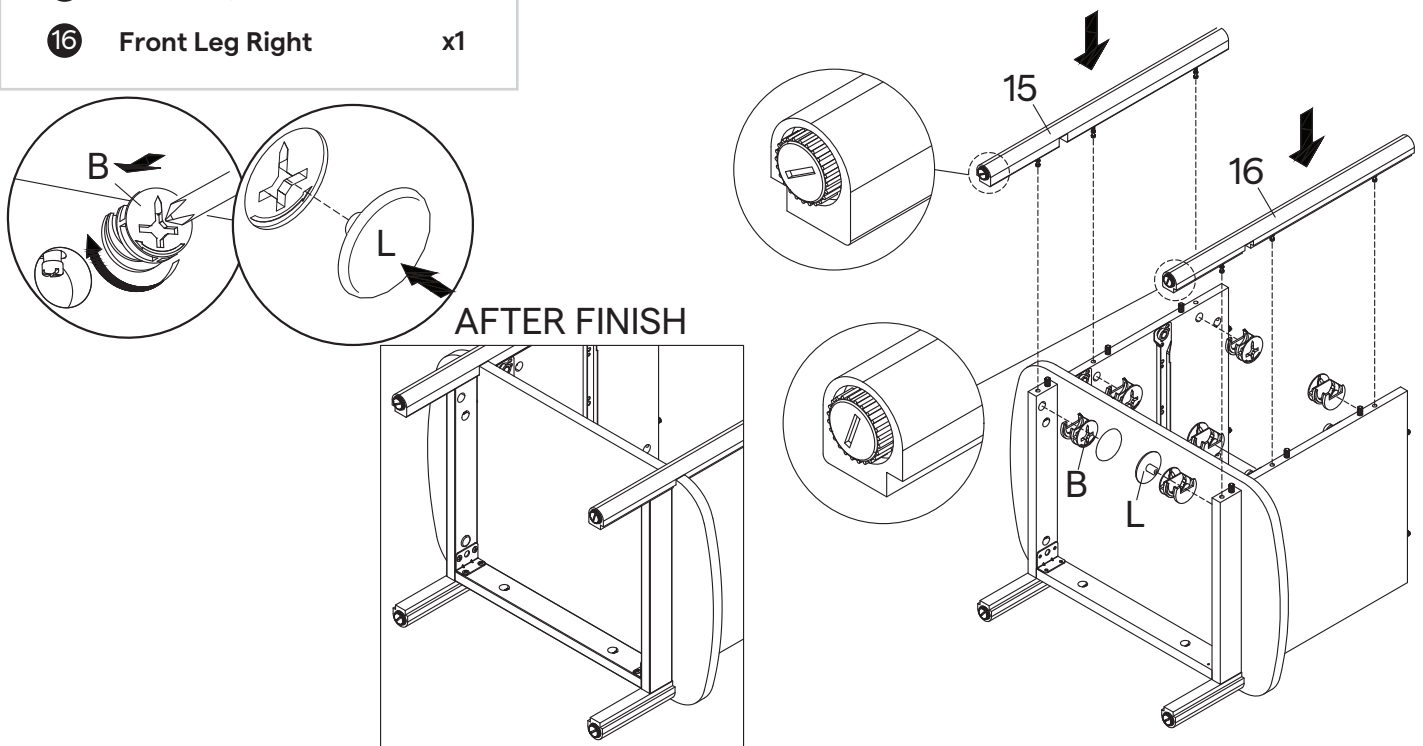

HARDWARE

- | | | |
|----------|-------------------|----|
| F | Screw M 7 x 50 mm | x2 |
| M | Allen Key | x1 |

15.1 Insert Screw M 7 x 50 mm (F) into Bottom Board, then tighten screws using Allen Key (M). Position as shown in the figure.

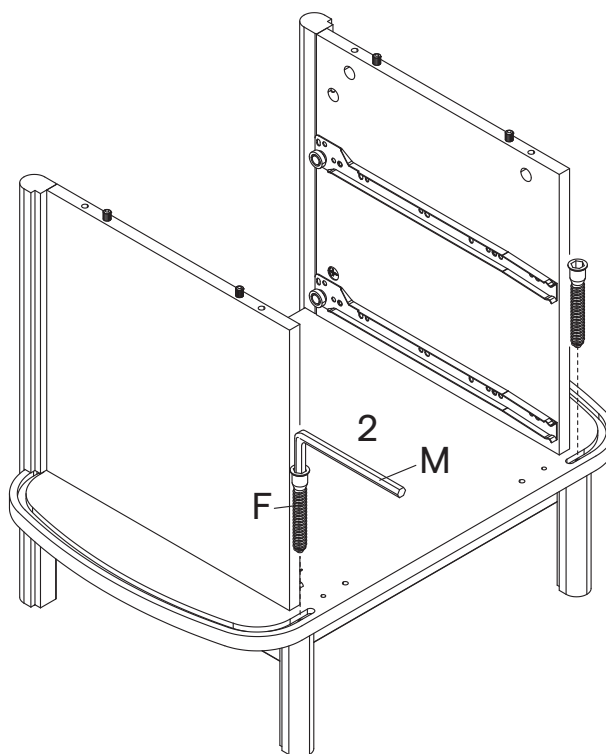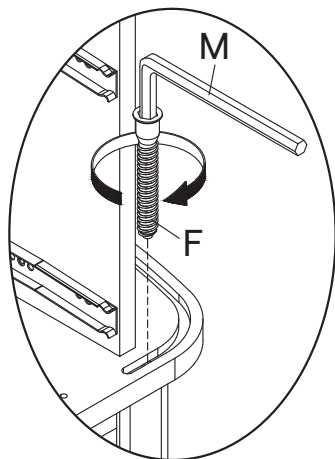

STEP 16

HARDWARE


- | | | |
|----------|---------------------------------------|----|
| A | Cam Bolt $\varnothing 6 \times 35$ mm | x2 |
| C | Cam Lock $\varnothing 12$ mm | x2 |

COMPONENTS

- | | | |
|-----------|------------|----|
| 17 | Back Board | x1 |
|-----------|------------|----|

16.1 Insert Cam Bolt $\varnothing 6 \times 35$ mm (A) into the Bottom Board, then tighten using screwdriver.


16.2 Combine Back Board (17) to component Bottom Board, secure with Cam Lock $\varnothing 12$ mm (C), then tighten using screwdriver. Position as shown in the figure.

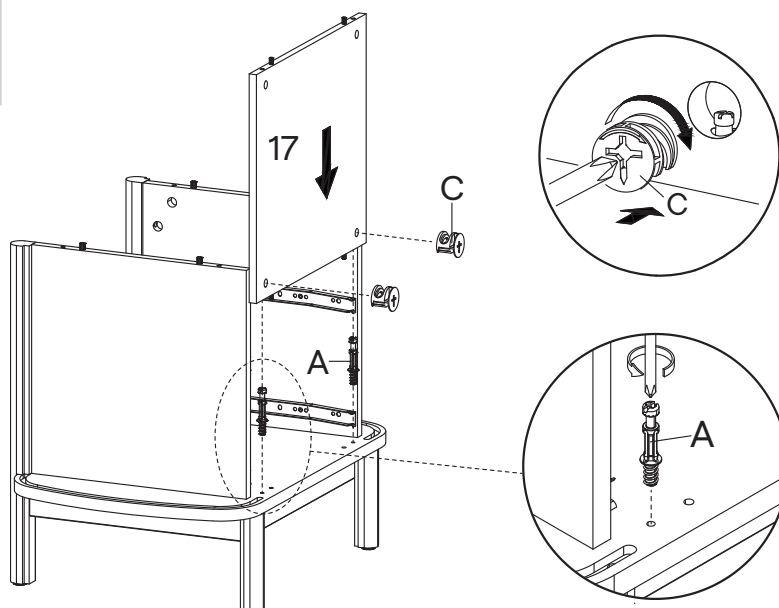

COMPONENTS

5 Bar Side x2

17.1 Combine Bar Side (5) into Bottom Board. Position as shown in the figure.

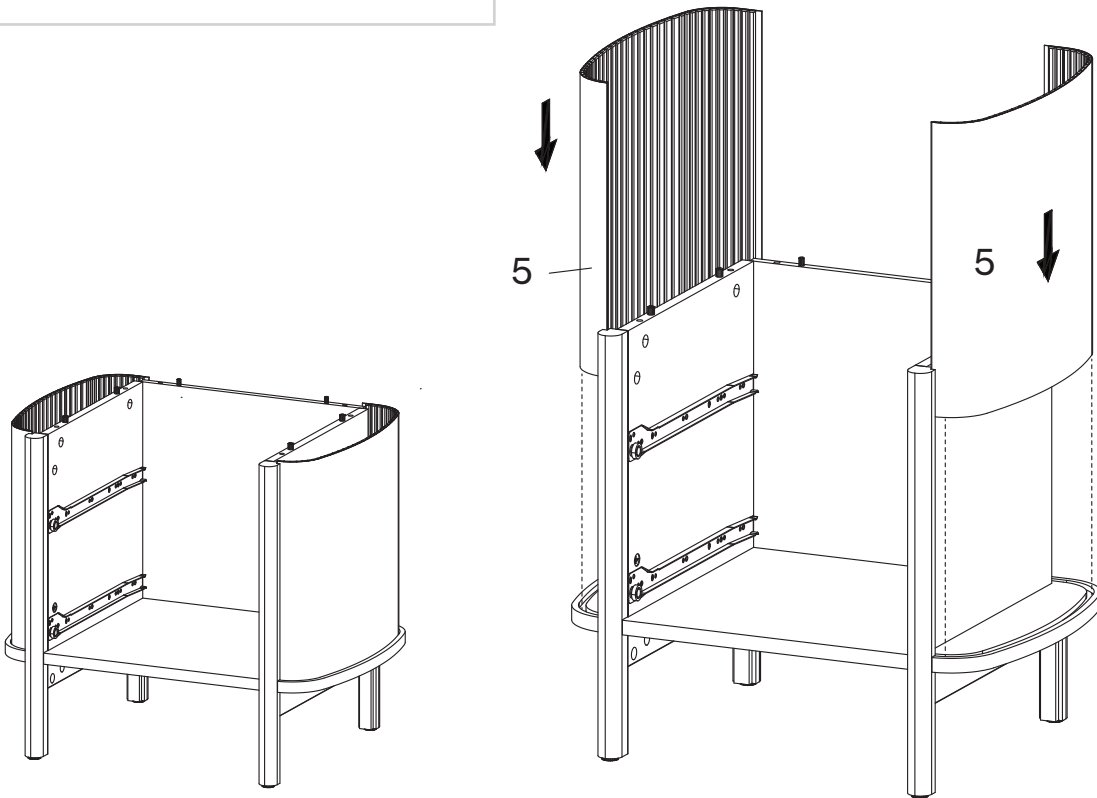

STEP 18



HARDWARE

A Cam Bolt Ø6 x 35 mm x6

COMPONENTS

1 Top Board x1

18.1 Insert Cam Bolt Ø6 x 35 mm (A) into the Top Board (1), then tighten using screwdriver.

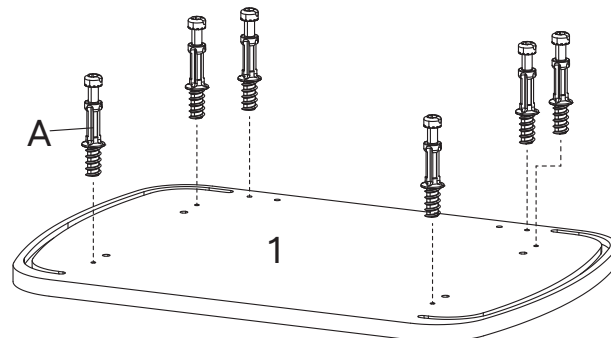




HARDWARE

- B** Cam Lock Ø15 mm x4
- C** Cam Lock Ø12 mm x2

COMPONENTS



- 1** Top Board x1

19.1 Combine Top Board (1) to Pre - Assembly from previous step. Secure with Cam Lock Ø15 mm (B) into Center Board and secure with Cam Lock Ø12 mm (C) into Back Board. Position as shown in the figure.

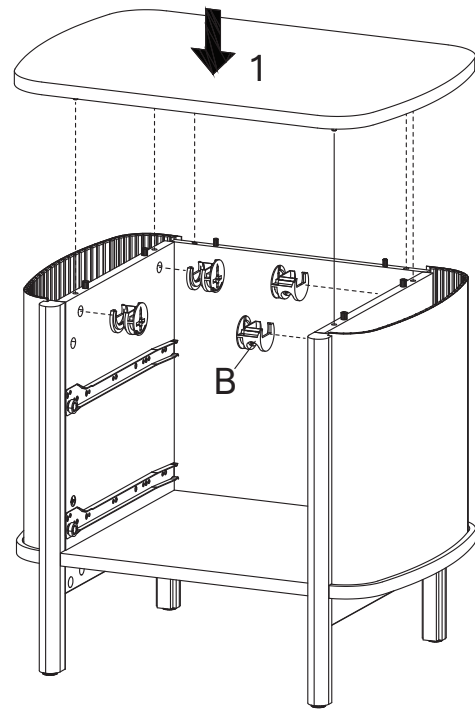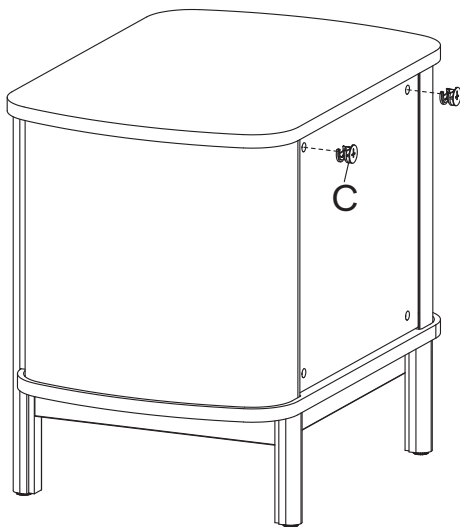

STEP 20

20.1 Hold the sides of drawer, position the wheel of rail at drawer back and the wheel of rail at Center boards, according to the image. Slide in the drawers one by one into the Nightstand.

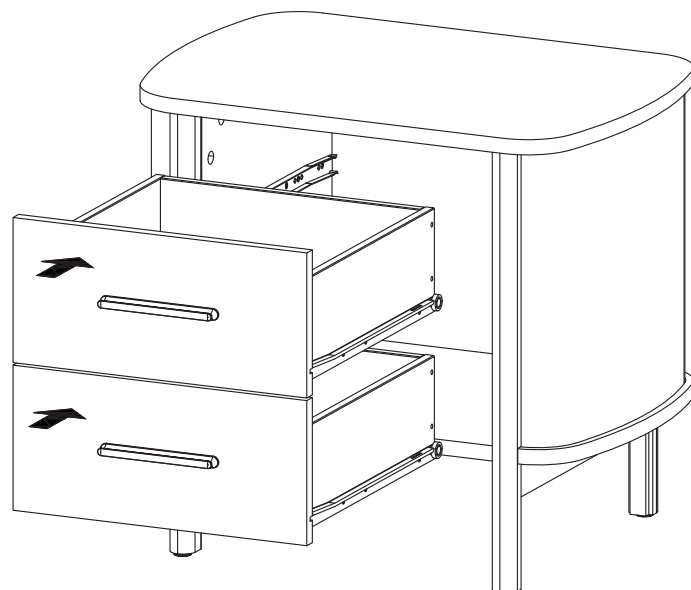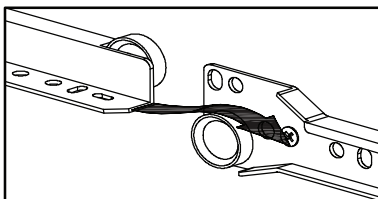

HARDWARE

P List


x2

21.1 Install List (P) into Groove on Bottom Board. Position as shown in the figure.



Great job!

Nightstand assembly is complete

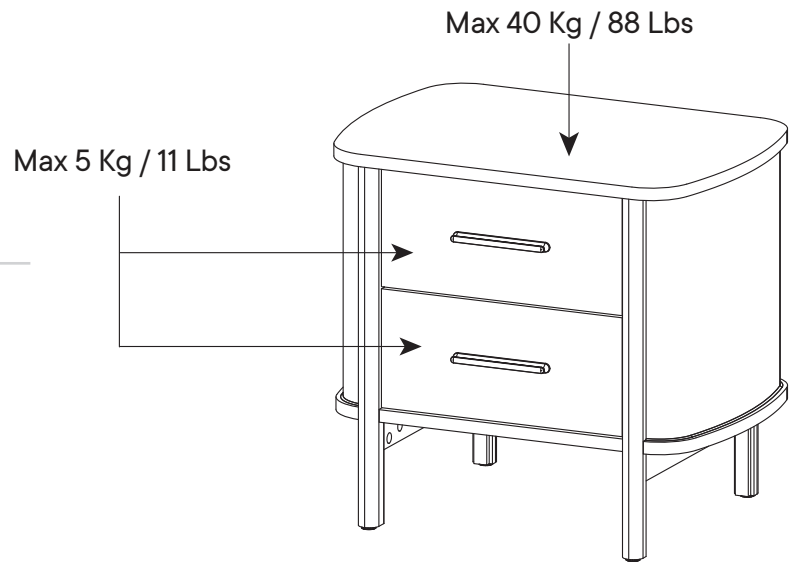

CARING FOR YOUR ITEM

- Indoor use only.
- Not contract grade.
- Clean using a non-abrasive cloth and a mild cleaner.
- Never use harsh chemicals, as they could damage the finish or integrity of the item.



CONNECT WITH US!

Tag us [@modway_furniture](#) and [#modway](#) for a chance to be featured.

modway



Questions? Contact us!
609.256.9000
cs@modway.com