
LUXURY VINYL

vinyl plank



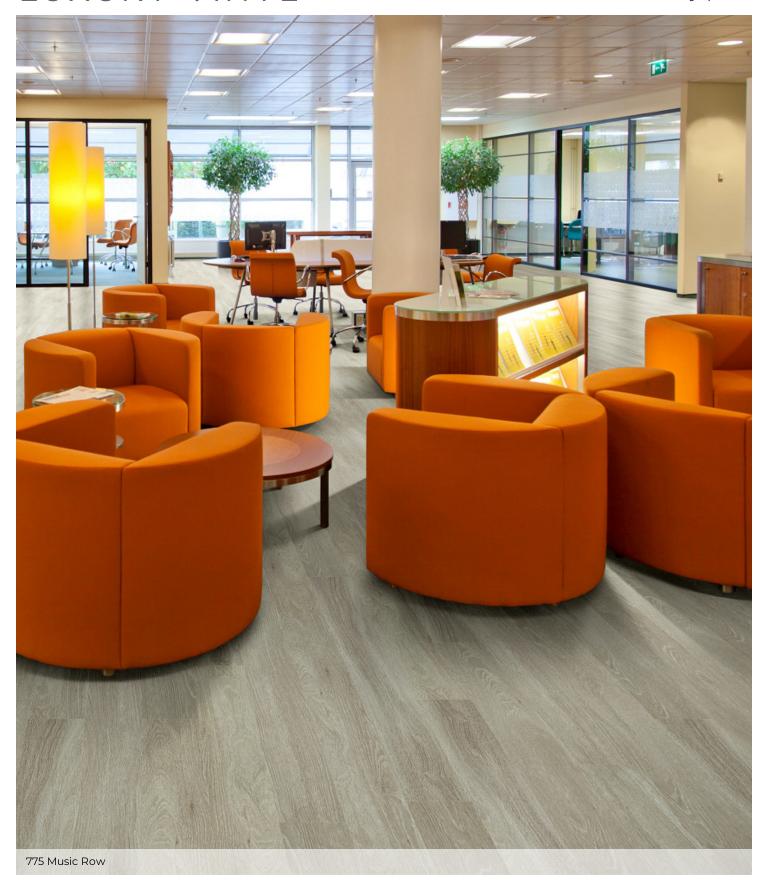

LUXURY VINYL

| | US Units | Metric Units | |
|---------------------------|--|--|--|
| Style Number | 0832V | | |
| Construction | Manufactured LVT <5.0 mm Dryb | Manufactured LVT <5.0 mm Dryback Residential | |
| Profile | Direct Glue | | |
| Size | 6" x 48" | 15.24 cm x 121.92 cm | |
| Overall Thickness | 0.098" | 2.5 mm | |
| Wear Layer Thickness | 12 mil (0.012") | 0.3 mm | |
| Finish | ScuffResist | | |
| Edge Description | Square | | |
| Area per Carton | 41.72 sq ft | 3.88 sq m | |
| Area per Pallet | 2002.56 sq ft | 186.04 sq m | |
| Installation | Glue | | |
| Installation Grade | Above, On, Below | | |
| FloorScore Certified | Yes | | |
| Residential Warranty | Residential Resilient Limited Warranty - Defects, Wear | | |
| | 25 Years | | |
| Commercial Warranty | 7 Year Light Commercial | | |
| | Com Ub Bond 4100/S150-95/4151 | | |
| Radiant Panel (ASTM E648) | Passes, Class I | | |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Colors









Color Variation: V2 -Slight

Color Variation: V2 - Slight

Suggested Adhesive


| Style Name | Style Number |
|-----------------|--------------|
| LG4100-4GALLON | 312VS |
| KWIKFLASH 4 GAL | 080VS |
| KWIKFLASH LV1 | 081VS |
| S150 SPRAY ADHS | 069VS |
| SHAW 200 TPS 4G | 026VS |
| SHAW 2001 GAL | 052VS |

Coordinating Trim



*Packaged with molding track

Coordinating Metal Trim

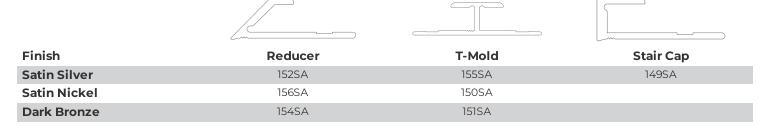

Installation Range

| Profile Size | Installation Range | |
|---------------------|------------------------|--|
| 3.5mm | 1.5mm to 3.5mm heights | |
| 5.5mm | 3.6mm to 5.5mm heights | |
| 8mm | 6mm to 8mm heights | |



LUXURY VINYL

TREADZ®



*packages of 3





