


OVERALL DIMENSIONS


SPECIFICATIONS

Overall Width	23 5/8" (58.6 cm)
Overall Height	34 1/8" (86.7 cm)
Overall Depth	23 1/4" (59.1 cm)
Door Clearance	8 3/8" (20.1 cm) @ 110° 1/2" (1.3 cm) @ 90° 25 1/8" (63.5) door length
Overall Capacity	5.4 cu. ft.
Minimum Cabinet Width	23 3/4" (60.3 cm)
Minimum Cabinet Depth	24" (60.9 cm)
Cutout Width	23 3/4" (60.3 cm)
Cutout Height	34 1/2" (87.7 cm) Min 35" (89 cm) Max
Electrical Requirements	1.0 A
Volt/Hertz/Amps	120 V, 60 Hz, 15 or 20 amp circuit
Shipping Weight	126 lb (57 kg)


**ATTENTION ELECTRICIAN:**  
A 115 volt 60Hz., 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.

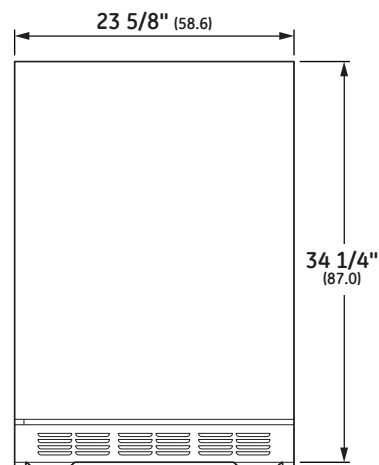

FRONT VIEW

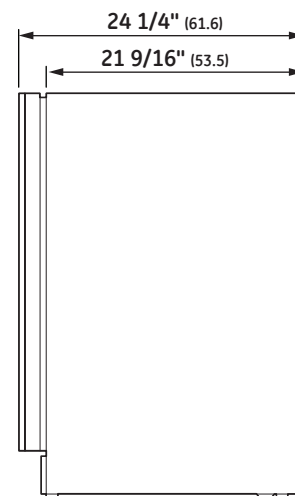

SIDE VIEW

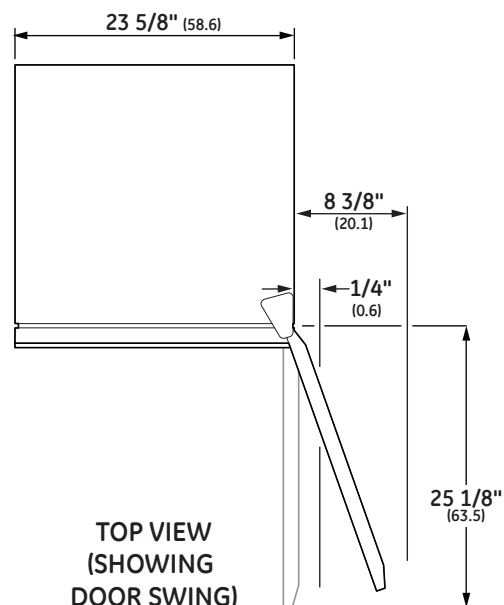


TOP VIEW (SHOWING DOOR SWING)


Dimensions in parentheses are in centimeters unless otherwise noted.

Actual product dimension may vary due to manufacturing tolerances.



INSTALLATION

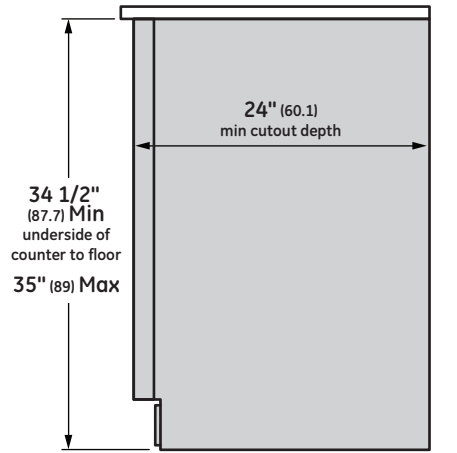

**FLUSH CUTOUT INSTALLATION  
SIDE VIEW**

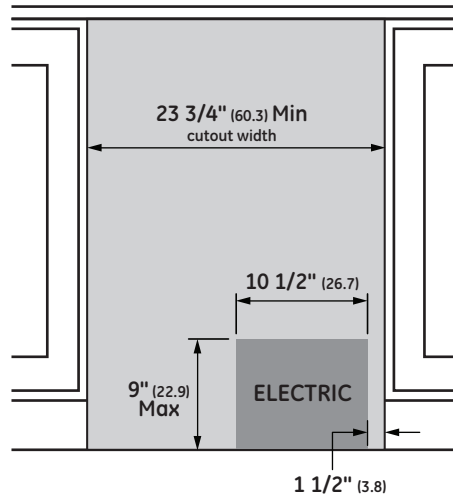


**INSTALLATION CUTOUT  
FRONT VIEW**

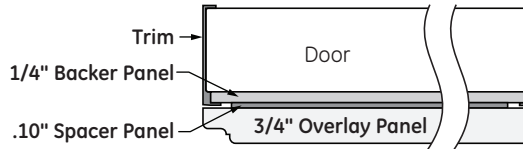

**3/4" OVERLAY PANEL DIMENSIONS  
(IN INCHES)**

	A (WIDTH)	B (HEIGHT)
1/4" Backer	23 3/16"	29 9/16"
.10" Spacer	22 1/2"	29 1/16"
3/4" Overlay	23 5/8"	30"

Note: Max assembled drawer panel weight is 25 lbs.

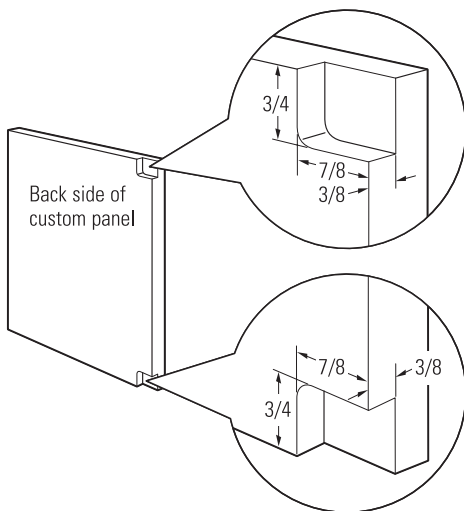

NOTES

Note: If installing between frameless cabinets, a 1/2" wide filler strip or side panel may be required. The filler strip will act as a spacer between the door case and adjacent cabinet and will prevent interference with cabinet door swing. The width of the opening must include filler panels.

Note: This product can be installed as a built-in or used free-standing. The top canopy can be removed for installation below a countertop.

The cutout depth must be 24". The cutout dimensions shown allows for a full door swing and access to the pull-out racks when installed as a built-in.

- The outdoor/indoor refrigerator can be used freestanding.
- Stainless steel top canopy can be removed for built-in installation.
- Vented stainless steel toe-kick.

## FEATURES AND BENEFITS

**ADJUSTABLE TEMPERATURE CONTROL**  
MAINTAINS  
a consistent temperature

**LED TEMPERATURE DISPLAY**  
Allows you to monitor the temperature at a glance

**CLEAR LEXAN CRISPER ON FULL-EXTENSION SLIDES**  
Provides easy access to contents

**REMOVABLE SPILLPROOF GLASS SHELVES**  
Helps contain spills for ease of cleaning

**CUSTOM-PANEL OPTION**  
Designed to be customized with a customer provided 3/4" thick custom door panel; A custom handle is also required

**FLUSH INSTALLATION**  
Allows near-seamless integration with surrounding cabinetry

**QUICK SPACE SHELF**  
Slides out of the way to make room for tall items

**LED LIGHTING**  
Places contents into clear, brilliant view

**BEVERAGE SHELF ON FULL-EXTENSION SLIDES**  
Holds up to five wine bottles or ten 12-oz. cans

**REVERSIBLE DOOR SWING**  
Easily reversed to left or right door swing as needed

