

CLEAN AND DRY DISHES QUIET PERFORMANCE

52 dBA 24" Built-In Dishwasher with Extended Dry

[MDF24P1BST](#) - [MDF24P1BWW](#) - [MDF24P1BBB](#) Hybrid Tub

Superior cleaning technology, combined with an Extended Dry feature, ensures dishes come out clean and extra dry. The hybrid stainless steel tub, with bright interior lighting, has a sleek, durable look and makes loading easier. The flexibility of loading and the NSF-certified Sanitize Cycle guarantee an effortless and carefree cleaning experience.

Extended Dry

Forget the towel, always ensure your dishes are extra dry.

Hybrid Stainless Steel Tub

The stainless-steel tub with a plastic bottom is durable and has a sleek look.

Flexible Loading

The adjustable upper rack and flip tines provide various loading options for dishes and cookware.

4 Wash Levels

Two wash arms with four wash levels provide better coverage.

LED Tub Light

Allows you to clearly see the inside, making loading and unloading easier.

NSF Certified Sanitize Cycle

Removes up to 99.9% of common household bacteria, ensuring your dishes are thoroughly cleaned with a high-temperature wash cycle.

Auto Wash Cycle

Intelligently detects the soil level, delivering clean dishes at lower cost.

Highlights

EXTENDED DRY



Forget the towel, always ensure your dishes are extra dry.

HYBRID INTERIOR TUB




The stainless-steel tub with a plastic bottom is durable and has a sleek look.

BRILLIANT TUB LIGHT



Allows you to clearly see the inside, making loading and unloading easier.

NSF-CERTIFIED SANITIZE CYCLE

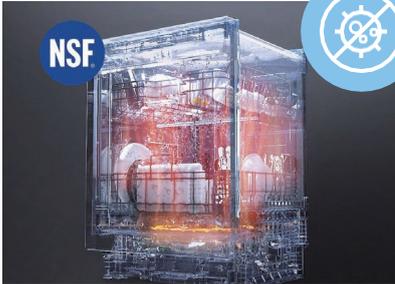


NSF



Removes up to 99.9% of common household bacteria, ensuring your dishes are thoroughly cleaned with a high-temperature wash cycle.

4 WASH LEVELS

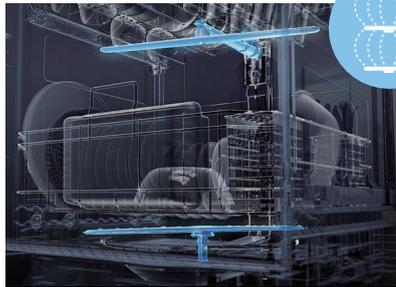

Two wash arms with four wash levels provide better coverage.

ADJUSTABLE UPPER RACK



Maximize the space in the lower basket for tall or bulky items.

FLIP TINES



Provides flexibility for loading pots, pans, and dishes.

3 PIECE SILVERWARE BASKET



Easily separate and remove part of the basket to accommodate extra dishes.

SPECIFICATION

UPC		
Color		Stainless Steel, White, Black
PERFORMANCE		
ENERGY STAR		Yes
Energy Level (kW/yr)		230 - 240
Certification, Safety		UL, NSF
Sound Level (dBA)		52
HYDRAULIC SYSTEM		
Disposer		Yes
Filter System		Blue Triple Filters
Main/Drain Pump		AC
Heating System		Visible
Water Metering		Flow Meter
Drying System		Exposed heating
Tub Top Spray System		Rotary
3-Level Spray Wash (Top)		No
Middle Spray System		Rotary
Lower Spray System		Rotary
FEATURES		
Capacity (Place Settings)		12
No. of Cycles		4 (Heavy, Auto, Normal, Quick)
No. of Options		4 (Sanitize, Heated Dry, Extended Dry, Delay Wash 2-4-8 Hour)
Control Lock		Yes
Cancel & Drain or Reset Button		Yes
Start & Pause Button		Yes
Digital Leak Sensor		Yes
Overflow Sensor		Yes
Water Fill Sensor (Flow Meter)		Yes
Turbidity Sensor		Yes
Audible End of Cycle Signal		On/Off
Triple Filter		Yes
Last Cycle Memory		Default to Normal Cycle with Heated Dry
Interior Lighting		Yes - 1 LED Lights
3rd Rack		No
Silverware Basket		3 pcs, Flexible
Upper Rack		
Height Adjustable		Yes, Manual adjustable
Cup Shelves		No
Flip Tines		No
Flip Tine Bracket Color		Midea Blue
Ball End Tines		Yes
Rack Color		Silver Metallic
Rack Handle		No
Lower Rack		
Flip Tines		2
Flip Tine Bracket Color		Midea Blue
Ball End Tines		Yes
Rack Color		Silver Metallic
Rack Handle		No
ELECTRICAL		
Power Supply		120V/60hz
Input Power (W)		600
PHYSICAL ATTRIBUTES		
Fascia Style		Front control with pocket handle
Button Style		Press button
Display/Cycle Indicator		1 indicator on control panel
Tub Material		Stainless Steel
Inner Door Material		Stainless Steel
Finish		Anti-Fingerprint Stainless Steel
Dimensions (W*D*H)	in	23 5/8 x 22 6/8 x 33 6/8
	mm	600 x 576 mm x 855
Net Weight	kg	32.2


BUILT-IN DISHWASHER

MDF24P1BST

MDF24P1BWW

MDF24P1BBB

UNIT DIMENSIONS

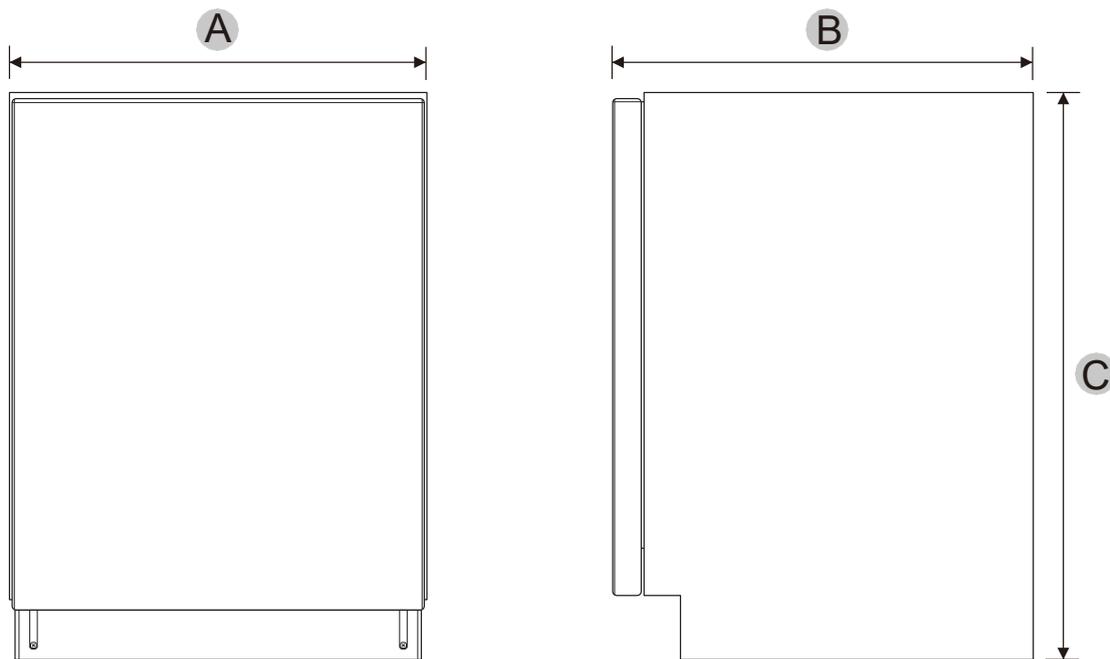

A (in) 23 5/8
(mm) 600

B (in) 22 6/8
(mm) 576

C (in) 33 6/8
(mm) 855

ELECTRICAL REQUIREMENTS

This dishwasher is designed for operation on an adequately wired individual 120 V, 60 Hz, 15- or 20-amp fused electrical supply with copper wire only. It is recommended that a time-delay fuse or circuit breaker be used, and that a separate circuit serving only this appliance be provided. If an outlet is used, it should be placed in an adjacent cabinet.

LOCATION REQUIREMENTS

Install the dishwasher where it will be protected from the elements. Protect it against freezing to avoid possible rupture of the fill valve. Such ruptures are not covered by the warranty. For winter storage information, see "Storing" in the "Dishwasher Care" section. Install and level the dishwasher on a floor that can support its weight, in an area suitable for its size and use.

WATER SUPPLY REQUIREMENTS

The water supply temperature should be 120°F to 150°F (49°C to 66°C).

The water supply must maintain water pressure between 20 and 80 psi for sufficient flow.