24" DUAL ZONE BEVERAGE CENTER

MARVEL PROFESSIONAL COLLECTION



MAIN FEATURES

- 2.69 cu ft. upper zone can hold up to 112 cans (12-oz), 64 longneck bottles or 2 upright two-liter bottles
- Upper zone features 3-in-1 Glide-Out Convertible Shelf with removable glass pane to convert to wine rack
- 2.3 cu ft. lower zone stores up to 16 wine bottles on 2 smooth-glide wine racks
- · Two independently controlled temperature zones
- Dynamic cooling technology delivers rapid cool down, frostfree operation, and temperature stability
- Argon-filled, UV-resistant tinted dual pane glass door options protect contents
- Digital controls allow you to select a temperature for each zone - Upper zone: 33°F to 45°F, Lower zone: 38°F to 65°F (The lower temperature must be equal to or greater than the upper temperature, maximum 20° higher)
- · Door ajar and high/low temperature alerts
- Adjustable LED theater-style lighting in arctic white or sapphire blue
- · Elegant midnight black interior
- Professional styling: Robust full-length handle and stainless steel accents
- · Reversible soft-close door allows for right or left swing
- · Door lock provides added security
- Panel ready model requires 3/4" or 5/8" custom panel and handle (not supplied by Marvel)

WARRANTY

 3-year parts and labor warranty with product registration and 5-year sealed system parts warranty (see complete warranty for details)

FINISH OPTIONS



DOOR STYLE	MODEL NUMBER
Stainless Steel Frame Glass	MPBD424-SG31A
Panel Ready Frame Glass	MPBD424-IG31A
Solid Stainless Steel	MPBD424-SS31A
Solid Panel Ready	MPBD424-IS31A



















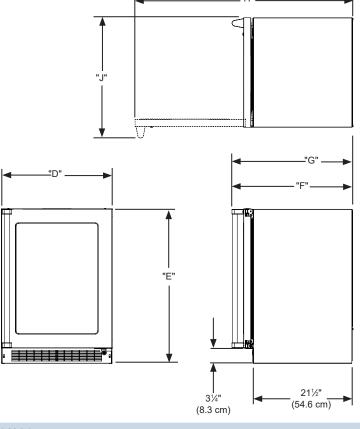

ROUGH IN DIMENSIONS*			CABINET DIMENSIONS.						
	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"J"
	24"	34" to 35"	24"	23-7/8"	33-3/4" to 34-3/4"	23-5/8"*	26-1/8"*	47-3/4"*	26-3/8"*
	(61 cm)	(86.4 cm to 88.9 cm)	(61 cm)	(60.7 cm)	(85.7 cm to 88.3 cm)	(60 cm)	(66.4 cm)	(121.3 cm)	(67 cm)

^{*}Stainless steel model dimensions only. For panel-ready models, see the owner's guide online at marvelrefrigeration.com.

PRODUCT SPECIFICATIONS

Capacity 5.0 cu. ft. **Cord Length** 6 ft.

Electrical Requirements 115V / 60 Hz / 15A

ENERGY STAR Yes

Panel Height 30-7/16" (77.3 cm)

Panel Thickness 5/8" (1.6 cm) or 3/4" (1.9 cm)

Panel Type 2-3/4" (7 cm) Frame Panel or Solid Panel

Panel Width 23-5/8" (60 cm)

Refrigerant Type R600a Sabbath Mode **Shipping Dimensions Shipping Weight**

Yes

28" W x 31" D x 37" H

160 lbs

Temperature Range

Upper Zone: 33°F to 45°F Lower Zone: 38°F to 65°F

For comprehensive installation instructions, including panel overlay details, please visit marvelrefrigeration.com to access the owner's guide. All specifications are subject to change without notice.

MARVEL