ASSEMBLY INSTRUCTION



KL OFFICE CHAIR


OFFICE CHAIR

ASSEMBLY INSTRUCTION

▽ ASSEMBLY PROGRAM


STEP 1

Attention:
take off the cape

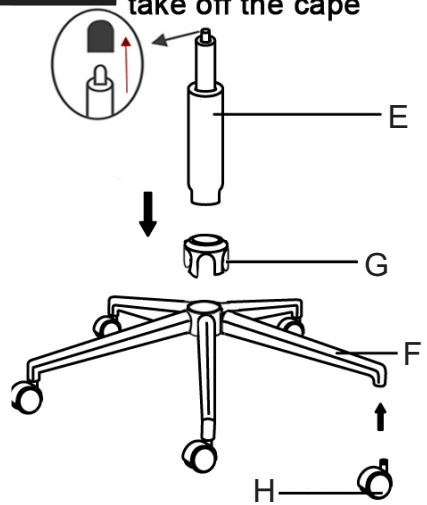

STEP 2


Assembly the armrest

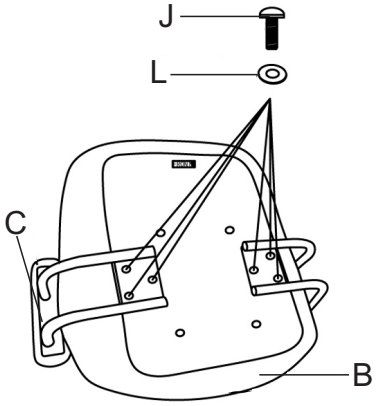

Attention:
Lock the screws to 80% first, then adjust the **armrest to right position before tighten them.**


STEP 3

Assembly the mechanism

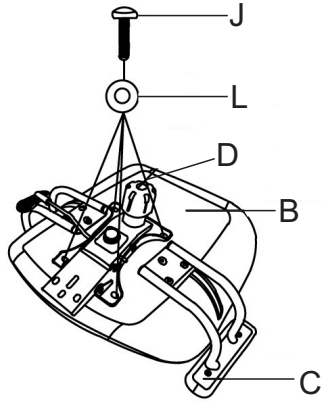


STEP 4

Assembly the backrest

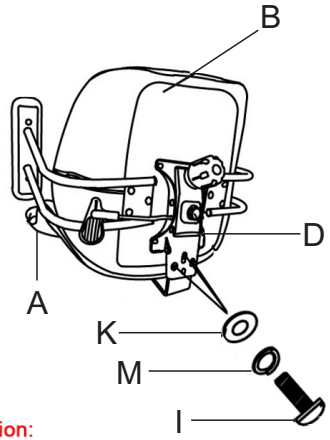

Attention:
Lock the screws to 80% first, then adjust the backrest to be very straight before tighten them


STEP 5

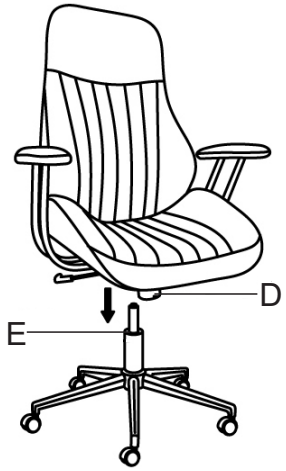


FINISH




▽ PARTS x QTY


A=Backrest x1 	H=Caster x5 
B=Cushion x1 	I=Screw(M8X25mm) x3 
C=Armrest x1 	J=Screw(M6X20mm) x10 
D=Mechanism x1 	K=Spacer(M8X17mm) x3 
E=Gaslift x1 	L=Spacer(M6X18mm) x10 
F=Base x1 	M=Spacer(M8X13mm) x3 
G=Art Cover x1 	N=Spanner x1 

The back can be locked in 4 positions

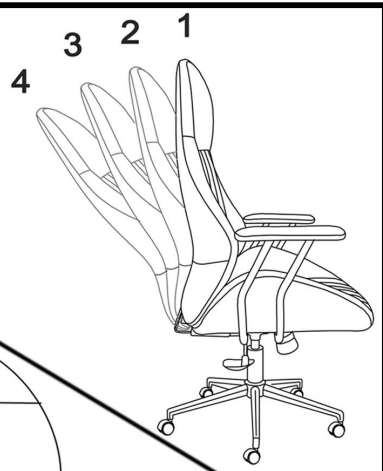


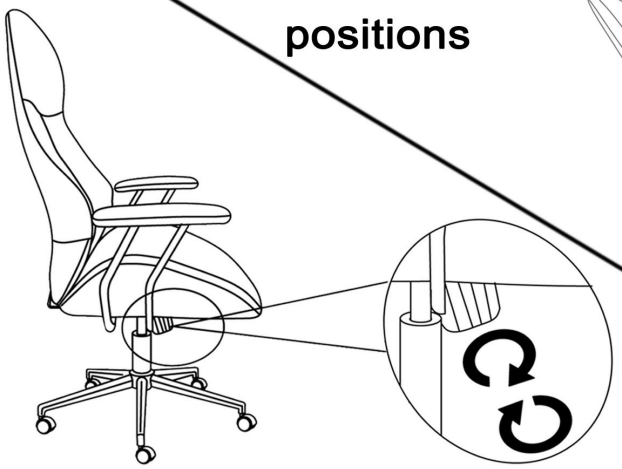

Spin this button clockwise or anticlockwise, to increase or decrease the strength needed when pushing the backrest backwards

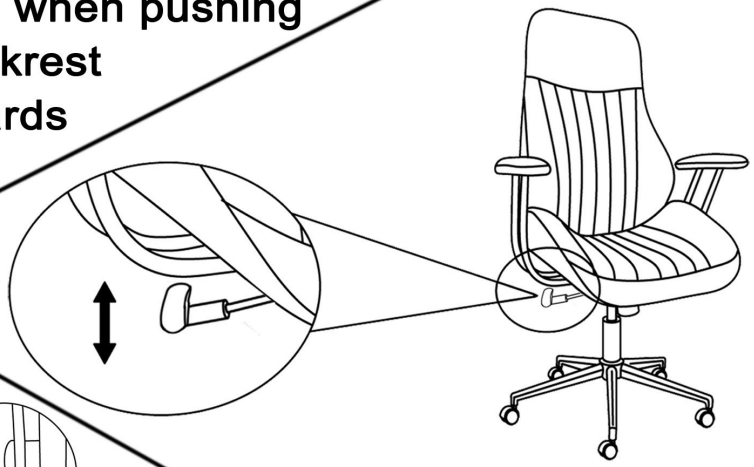


Adjust the lift of the seat

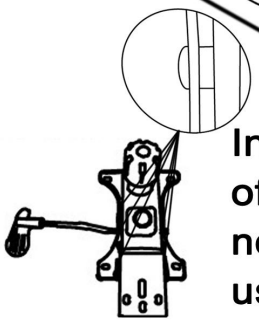


In case of abnormal noise or not smooth use of the mechanism, pls add the lubricating oil or edible oil on the marked place.

How to lock the position

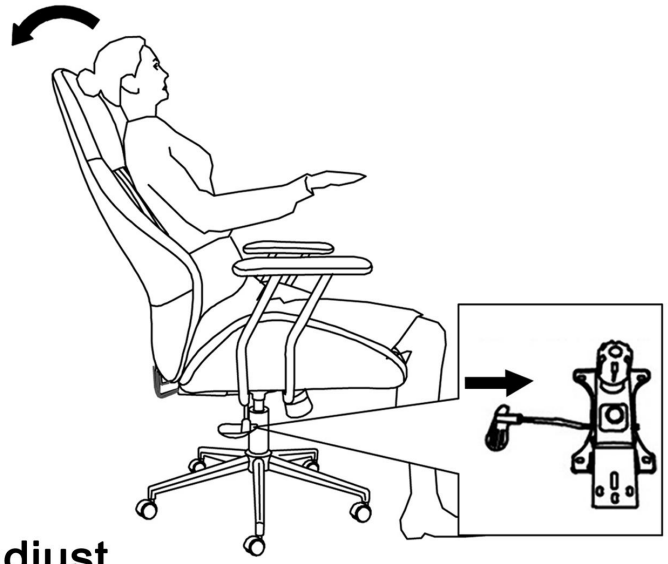

Lean back and adjust to the desired angle,then push the handle inside

How to unlock the position

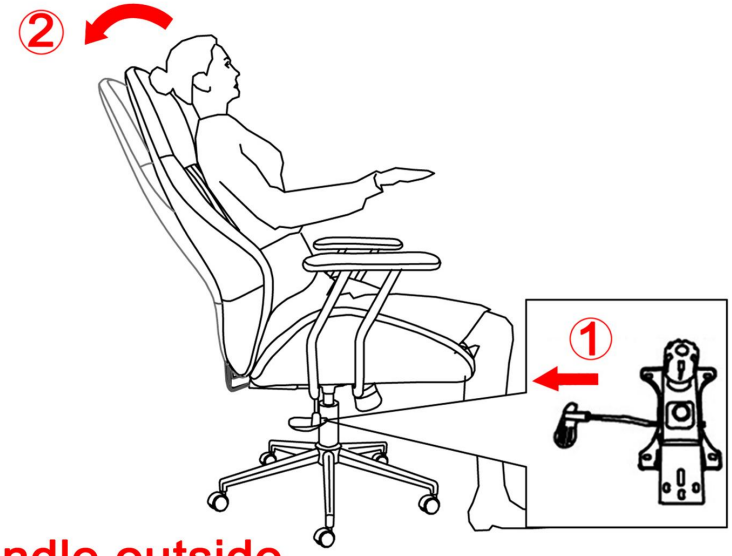

①Pull the handle outside

②Lean back and the backrest will be unlocked