

KM 7735 FL

30-inch induction cooktop, operated with its own controls with PowerFlex cooking area for maximum performance



- Intuitive quick selection via number sequences – Smart Select
- 4 cooking zones incl. 1 powerful PowerFlex cooking area
- With a width of 30 3/8 (769) in (mm) for proud-mounted or flush-mounted installation
- Shortest heating-up times – TwinBooster
- Communication with the ventilation hood – automatic Con@ctivity function

EAN: 4002516611400 / Material number: 12074210 / Old Material Number: 26773570USA

General information	
Model identifier	KM 7735 FL
Manufacturer material number	12074210
EAN number	4002516611400
Marketing class	Platinum
Heating type	
Fuel type	Induction
Design	
Independent of oven	•
Design	
Elegant glass ceramic surface	•
Ceramic surface color	Black
Flush-mounted installation	•
Proud installation	•
Cooking zone details	
No. of rings	4
Number of cooking areas	1
Maximum number of pans	4
PowerFlex cooking zones	
No.	2
Type	PowerFlex cooking zone
Size in mm	Ø 150 – 230
Max. rating in W	2100
Max. booster rating in W	3000
Max. TwinBooster rating in W	3700
1st cooking zone/cooking area	
Position	front left
Type	Variable cooking zone
Size in mm	Ø 180-280
Max. rating in W	2600
Max. Booster power rating in W	3000
Max. TwinBooster power rating in W	3700
2nd cooking zone/cooking area	
Position	rear left
Type	Variable cooking zone
Size in mm	Ø 100-160
Max. rating in W	1400
Max. Booster power rating in W	1700
Max. TwinBooster power rating in W	2200
3rd cooking zone/cooking area	
Position	right
Type	PowerFlex bridge
Size in mm	230x390
Max. rating in W	3400
Max. Booster power rating in W	4800
Max. TwinBooster power rating in W	7400
User convenience	
Networking with Miele@home	•

KM 7735 FL

30-inch induction cooktop, operated with its own controls
with PowerFlex cooking area for maximum performance




EAN: 4002516611400 / Material number: 12074210 /
Old Material Number: 26773570USA

Automatic function	Con@ctivity 3.0
Pan and pan size recognition	•
Operation via touchpad sensors	SmartSelect
Display color	Yellow
Permanent pan recognition	•
Stop & Go function	•
Wipe protection	•
Recall function	•
Minute minder	•
AutoBoost	•
Keep-warm function	•
Individual setting options (e.g. acoustic signal tones)	•
Cleaning convenience	
Easy to clean ceramic glass	•
Safety	
Safety cut-out	•
Lock function	•
System lock	•
Integrated cooling blower	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions (width) in in. (mm)	30 3/8 (769)
Dimensions (height) in in. (mm)	3 1/8 (77)
Depth in in. (mm)	21 1/4 (538)
Built-in height with mains connection box in in. (mm)	3 7/8 (98)
Cutout dimensions (width) in in. (mm)	28 5/8 in (724 mm)
Cutout dimensions (depth) in in. (mm)	20 1/2 in (518 mm)
Internal cutout dimensions in mm (width) with flush installation	749
Internal cutout dimensions in mm (depth) with flush installation	518
Weight in lbs. (kg)	46 (21)
External cutout dimensions in mm (width) with flush installation	773
External cutout dimensions in mm (depth) with flush installation	542
Total connected load in kW	7.60
Power cord length in in. (m)	3 (1.2)
Voltage in V	208-240
Frequency in Hz	50-60
Standard accessories	
Power cord	Yes

KM 7735 FL


30-inch induction cooktop, operated with its own controls with PowerFlex cooking area for maximum performance

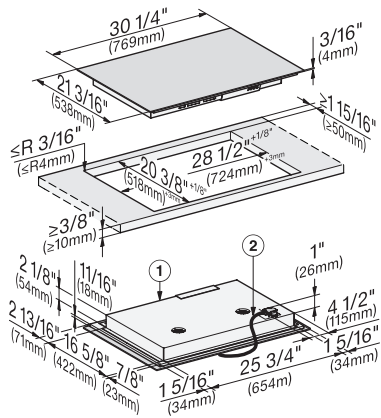

KM7735FL – frameless overlaying installation

(*footnote) – drawing

① front, ② Flexible metal hose with power cords, L = 4' (1,200 mm),

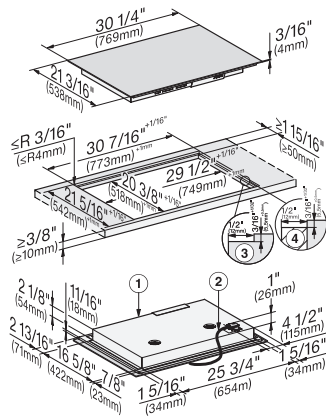

KM7735FL – flush installation (*footnote) – drawing

① Front, ② Flexible metal hose with power cords, L = 4' (1,200 mm), ③ Stepped cut-out, natural stone countertop, ④ Wooden strip 1/2" (12 mm) (not supplied)