




**GE APPLIANCES**  
a Haier company

## JVM6175SKSS

### GE 1.7 Cu. Ft. Over-the-Range Sensor Microwave Oven

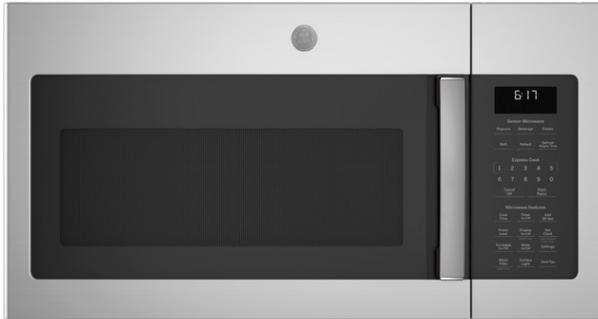

Optional Kits	15" Bump Out Kit - JXBUMPBB
Optional Side Filler Panel Kit	JX36BSS
Recirculating Charcoal Filter Kit	WB02X35687   Included
Color Appearance	Stainless Steel
Door Color	Stainless Steel
Handle Color	Stainless Steel Appearance
Installation	Easy Mount
Oven Door Features	Oven Window
Total Capacity (cubic feet)	1.70 cu ft
Vent CFM	300
Non-Vented	Recirculating (Factory Set - Filter Included)
Venting Type	Convertible to External Venting
Control Features	Add 30 Seconds   Surface Light   Vent Fan   Turntable On/Off   Replace Filter Notification   Defrost Weight/Time   Melt   Mute On/Off   Timer On/Off   Cook Time   Set Clock   Power Level   Clock Display   Cancel/Off   Lock Controls   Start/Pause
Control Type	Electronic Touch
Cooking Modes	Microwave

*Specifications are subject to change without warning. Specifications are intended for initial planning purposes and any final planning, cabinet & countertop cutouts, etc. should be calculated using the manufacturer's installation guide or actual appliance.*



**GE APPLIANCES**  
a Haier company

Cooking Technology	Microwave
Cooktop Lighting	Halogen - 2 Bulbs   Bright/Night/Off
Display On/Off	Yes
Electronic Digital Display with Clock	Digital (1 line)
Exhaust Fan	2-Speed   300-CFM
Express Cook	1-5 Minutes
Interior Oven Light	Incandescent
Microwave Sensor Cooking Controls	Beverage   Melt   Defrost Weight/Time   Popcorn   Potato   Reheat
Microwave Watts (IEC-705)	1,000 W
Power Levels	10
Product Type	Over-the-range Microwave
Sound Volume Control	Yes
Style	Over-The-Range
Turntable	Glass
Turntable On / Off	Yes
Turntable Size	12.80 in
Electrical Input - 120V Amperage	15
Electrical Input - 120V Watts	1580
Input Volts/Hertz	120/60
Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance
Warranty Notes	See written warranty for full details
Approximate Shipping Weight	59 lb
Cabinet Width	30 in
Cavity (W x H x D)	20-11/16 x 10-5/16 x 14-3/16
Net Weight	52 lb
Overall Depth	15 9/16 in
Overall Height	16 5/16 in
Overall Width	29 7/8 in

*Specifications are subject to change without warning. Specifications are intended for initial planning purposes and any final planning, cabinet & countertop cutouts, etc. should be calculated using the manufacturer's installation guide or actual appliance.*

# JVM6175SK/EK/BL/YK

## GE® 1.7 cu. ft. Over-the-Range Sensor Microwave Oven

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


**NOTE:** Requires 120V grounded outlet. Electrical receptacle must be located in cabinet above microwave oven. No additional wiring, venting or cabinet rebuilding necessary in Many cases. Complete detailed, easy-to-follow installation instructions and convenient full-size templates are packed with the microwave oven.

**IMPORTANT INFORMATION:** When installing the microwave oven over a range, allow minimum of 2" from bottom of microwave oven to top of range backguard to allow for removal of light covers.

**VENTILATION OPTIONS:** The microwave ovens are designed for adaptation to the following three types of ventilation:

- Outside exhaust (vertical - as shown)
- Outside exhaust (horizontal)
- Recirculating (non-vented ductless - see Filter Kit drawing)

**INSTALLATION INFORMATION:** This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

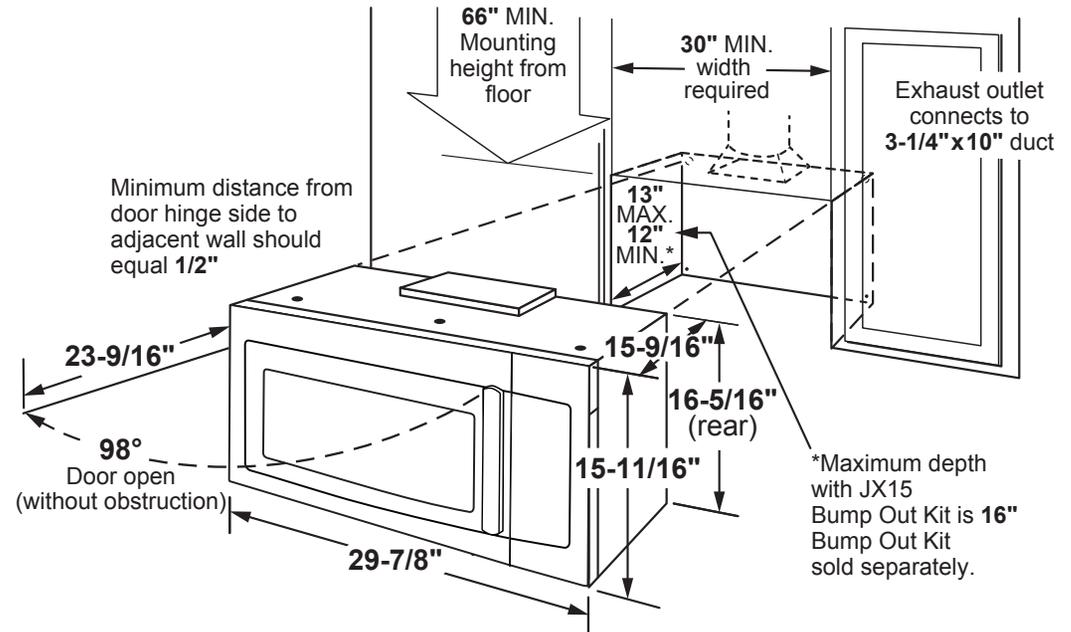

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



# JVM6175SK/EK/BL/YK

## GE® 1.7 cu. ft. Over-the-Range Sensor Microwave Oven

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

**HOOD EXHAUST DUCT:** Outside ventilation requires a HOOD EXHAUST DUCT. Read the following carefully.

**EXHAUST CONNECTION:** The hood exhaust has been designed to mate with a standard 3-1/4" x 10" rectangular duct. If a round duct is required, a rectangular-to-round transition adaptor must be used. Do not use less than a 6" diameter duct

**REAR EXHAUST:** If a rear or horizontal exhaust is to be used, care should be taken to align exhaust with space between studs, or wall should be prepared at the time it is constructed by leaving enough space between the wall studs to accommodate exhaust.

**MAXIMUM DUCT LENGTH:** For satisfactory air movement, the total duct length of 3-1/4" x 10" rectangular or 6" diameter round duct should not exceed 140 equivalent feet.


**ELBOWS, TRANSITIONS, WALL AND ROOF CAPS**, etc., present additional resistance to airflow and are equivalent to a section of straight duct which is longer than their actual physical size. When calculating the total duct length, add the equivalent length of all transitions and adaptors plus the lengths of all straight duct sections. The chart below shows the approximate feet of equivalent length of some typical ducts.

DUCT	EQUIVALENT FEET
<b>A.</b> Rectangular-to-round Transition Adaptor	5 ft.
<b>B.</b> Wall Cap	40 ft.
<b>C.</b> 90° Elbow	10 ft.
<b>D.</b> 45° Elbow	5 ft.
<b>E.</b> 90° Elbow	25 ft.
<b>F.</b> 45° Elbow	5 ft.
<b>G.</b> Roof Cap	24 ft.

### OPTIONAL ACCESSORIES

Filler Panel Kit JX36BWW/  
BBB/BSS/BES/BTS

When replacing a 36" range hood, this kit fills in the additional width to provide a custom built-in appearance. For installation between cabinets only; not for end-of-cabinet installation. Each kit contains two 3"-wide filler panels.

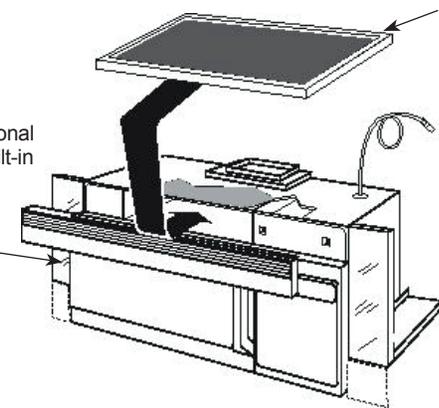

Filter Kit  
WB02X35687  
(included)  
Recirculating Charcoal  
Filter Kit to be used  
when the microwave  
oven cannot be vented  
to the outside.



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.