




Style Name	<b>Symbiotic 12</b>	
Style Number	<b>5M302</b>	
Construction	<b>High Performance Luxury Vinyl Tile</b>	
Class / ASTM F1700	<b>Class III Printed Film Vinyl Tile</b>	
Finish	<b>ExoGuard+®</b>	
	U.S.	Metric
Nominal Dimensions	<b>6 in w, 48 in l</b>	<b>15 cm w, 122 cm l</b>
Actual Dimensions	<b>5.96 in w, 48 in l</b>	<b>15.14 cm w, 121.92 cm l</b>
Wear Layer Thickness	<b>12 mil (0.012 in)</b>	<b>0.3 mm</b>
Overall Thickness	<b>0.098 in</b>	<b>2.5 mm</b>
Installation	<b>Direct Glue</b>	
Recommended / Required Adhesive	<b>LokWorx+Resilient 7015M (4gal) 7005M (1 gal) or S150 5125M</b>	


## Packaging

Pieces per box	<b>21 pcs</b>	
Area per box	<b>41.72 sq ft</b>	<b>3.88 sq m</b>
Weight per box	<b>36 lbs</b>	<b>16.33 kg</b>


## Recommended Installation Method

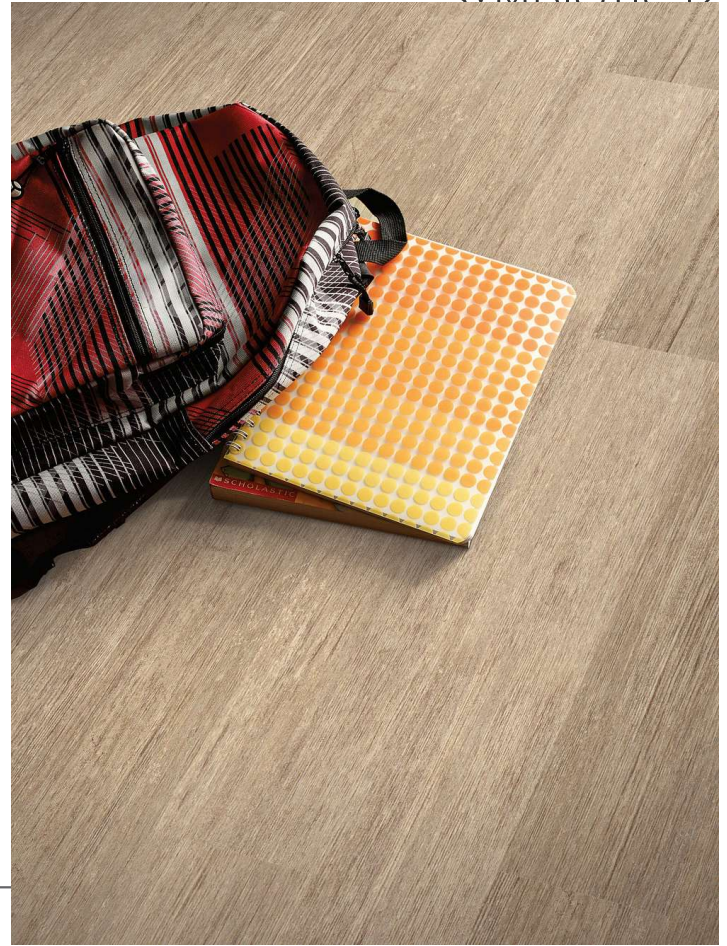

ashlar



brick



herringbone



monolithic



stagger

## Performance Testing

Static Load (ASTM F970)	<b>Passes (Modified), 1500 PSI</b>
Residual Indentation (ASTM F1914)	<b>Passes</b>
Resistance to Heat (ASTM F1514)	<b>Passes</b>
Resistance to Light (ASTM F1515)	<b>Passes</b>
Resistance to Chemicals (ASTM F925)	<b>Passes</b>
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>
Slip Resistance (ASTM D2047)	<b>ADA compliant</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

**7 Year Commercial Limited**

## Environmental

Indoor Air Quality	<b>FloorScore® Certified</b>
Recycled Content	<b>Pre-consumer - 30%, Post-consumer - 0%</b>

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

