

---

# BERTAZZONI PROFESSIONAL SERIES

## UNDERMOUNT AND WALLMOUNT HOOD, 1 BLOWER



The single-motor canopy hoods deliver extraction power up to 600 CFM with three different power settings. They come equipped with aluminum mesh filters or optional baffle filters, all easily removable and dishwasher safe. They can be installed under a cabinet or on the wall with an optional narrow or wide duct cover. The design matches Bertazzoni Professional Series ranges and cooktops while also complementing other Bertazzoni Series.



Single-motor canopy hood shown with optional  
Narrow Duct Cover



Single-motor canopy hood shown with optional  
Full Width Duct Cover



THE INTEGRATED KITCHEN

## BERTAZZONI PROFESSIONAL SERIES

48" UNDERMOUNT CANOPY HOOD, 1 BLOWER  
36" UNDERMOUNT CANOPY HOOD, 1 BLOWER

**Range Hood 48**  
KU48 PRO 1 X

**Range Hood 36**  
KU36 PRO 1 X


### Features

Motor	1 - 3 speed	1 - 3 speed
Electronics control	1	1
Halogen lights	2	2
Filters	aluminium mesh	aluminium mesh
Recommended Distance from woktop	25 1/2" - 31 1/2"	25 1/2" - 31 1/2"
Motor power	600 cfm	600 cfm
Electrical requirements	120V - 60Hz	120V - 60Hz
Max. Amp usage	3.3 A	3.3 A

All KU hoods can be installed under 12" deep wall cabinets or with the optional height-adjustable narrow and large duct covers.

Recirculation Kit (Item 901154) can be installed in combination with the narrow Duct Cover (Item 901262), and full width Duct Cover (Item 901261 for 48"; Item 901265 for 36"). Duct Cover for ceiling height 8-10 ft (item 901281).

Optional: European Baffle Filter available (item 402433 - 4 filters for KU48, 3 filters for KU36)

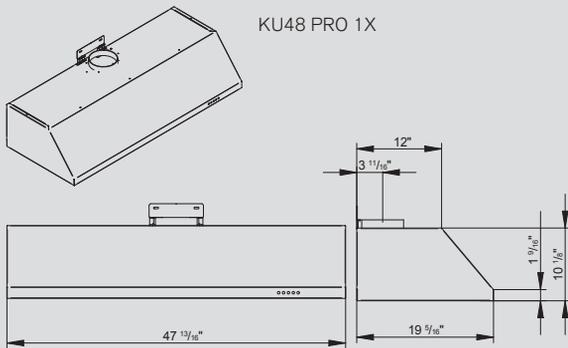

KU48 PRO 1X

## BERTAZZONI PROFESSIONAL SERIES

30" UNDERMOUNT CANOPY HOOD, 1 BLOWER  
24" UNDERMOUNT CANOPY HOOD, 1 BLOWER

**Range Hood 30**  
KU30 PRO 1 X

**Range Hood 24**  
KU24 PRO 1 X


### Features

Motor	1 - 3 speed	1 - 3 speed
Electronics control	1	1
Halogen lights	2	2
Filters	aluminium mesh	aluminium mesh
Recommended Distance from woktop	25 1/2" - 31 1/2"	25 1/2" - 31 1/2"
Motor power	600 cfm	600 cfm
Electrical requirements	120V - 60Hz	120V - 60Hz
Max. Amp usage	3.3 A	3.3 A


All KU hoods can be installed under 12-inch deep wall cabinets or with the optional height-adjustable narrow and large duct covers.

Recirculation Kit (Item 901154) can be installed in combination with the narrow Duct Cover (Item 901262) and full width Duct Cover (Item 901266 for 30"). Duct Cover for ceiling height 8-10 ft (item 901281).


Optional: European Baffle Filter available (item 402432 for KU30 - 3 filters, item 402433 for KU24 - 2 filters)

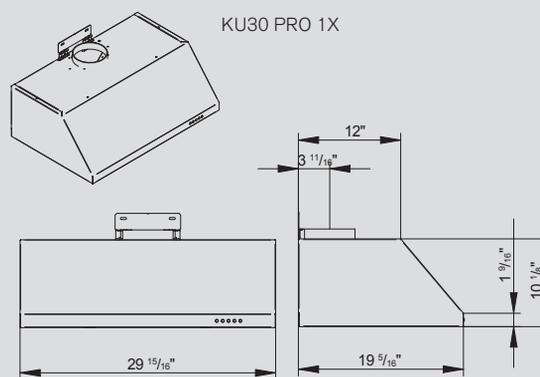

KU30 PRO 1X

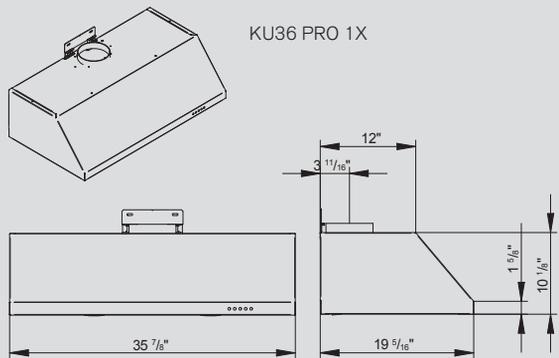

KU36 PRO 1X

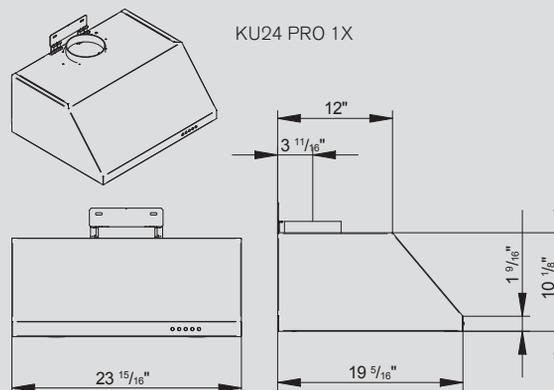

KU24 PRO 1X

## ACCESSORIES

### 901253 Kit Baffle Filters

#### for KU24 KU36 KU48 PRO


contains: 4 filters suitable for all 3 hood sizes all lines; K36 requires 3, K48 requires 4, KU24 requires 2 filters item 402433

### 901252 Kit Baffle Filters for K30 PRO HER

KU30 requires 3 filters 402432

### 901262 Narrow Duct Cover

for KU48 PRO 1 X - KU36 PRO 1 X  
KU30 PRO 1 X - KU24 PRO 1 X



### 901261 Large Duct Cover

for KU48 PRO 1 X

### 901265 Large Duct Cover

for KU36 PRO 1 X

### 901266 Large Duct Cover

for KU30 PRO 1 X

