

# SCCG50 & SCCP50 – 50 lb Gourmet Ice Machine

SCCG50 & SCCP50 – 50 lb Gourmet Ice Machine

## Brilliance™ Under-Counter Gourmet Ice Machine



### Features

15" cabinet width, produces up to 65 lbs. of gourmet ice in 24 hours. Stores up to 26 lbs.

Uniquely-shaped, crystal-clear, slow-melting, taste-free, odorless ice - won't dilute the flavor of drinks.

Uses less than half the energy and one third the water of Legacy model

Designed with sleek styling and virtually disappears when installed with a custom wood front that matches surrounding cabinetry. If a custom wood front panel is not used, then stainless will be the finishing option.

Outdoor stainless steel model available.

Water-quality sensor detects hard water conditions and control system purges mineral laden water with every harvest cycle, which helps to reduce water consumption.

Lighted bin and self-closing door.

User-friendly control panel informs whether power is on, alerts a no-water condition, and a time to clean reminder.

Available with built-in drain pump.

### 24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
65 / 30	48 / 22	26 / 12



**Control Board**



**Water Sensor**



**Scoop**



### Gourmet Ice




Gourmet Cube  
1" x 1½" x 1¼"  
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for mixed drinks.

### Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

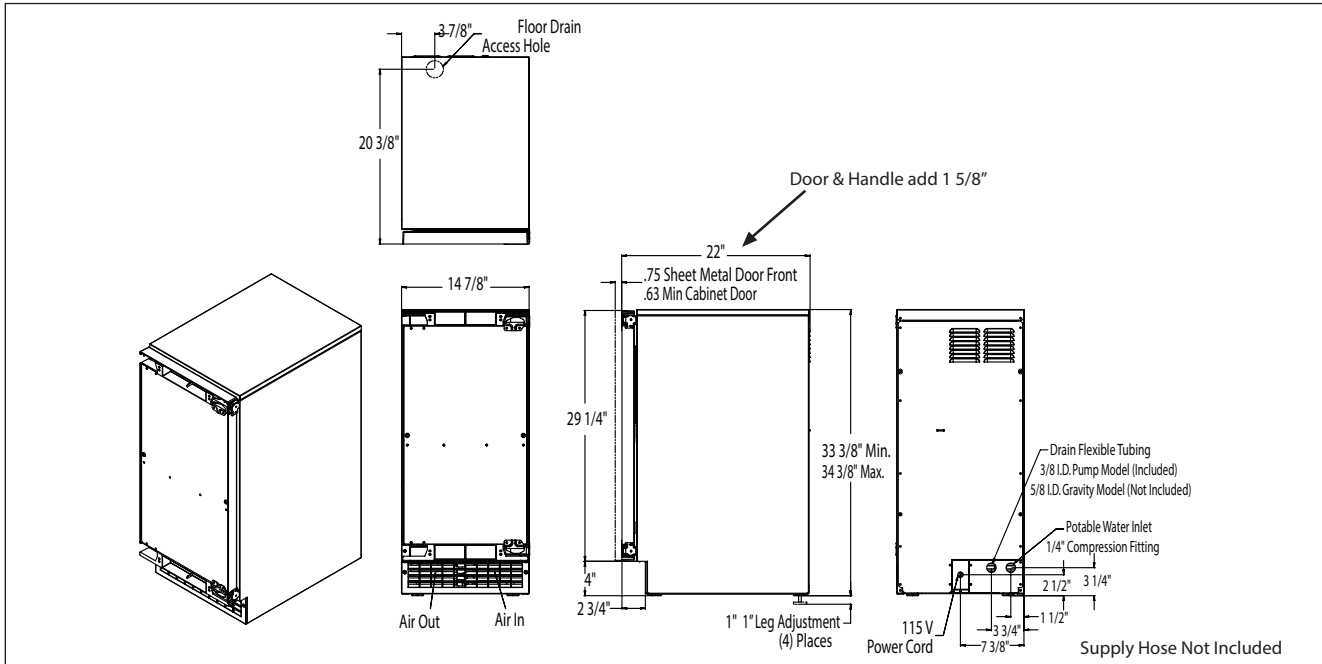

**All Models**

24 Hour Ice Production:  
(70 deg. Air / 50 deg. Water)  
65 lb / 30 kg

(90 deg. Air / 70 Deg. Water)  
50 lb / 23 kg

Bin Storage Capacity:  
26 lb / 12 kg

Condenser Type:  
Air

Basic Electrical:  
(Volts/Hz/Phase)  
115/60/1

Amps:  
5

Maximum Fuze Size:  
15


Refrigerant:  
R-134A

Dimensions (W x D x H):  
Unit (without legs adjusted):  
14.875" x 22" x 33.375"  
(37.8 x 55.9 x 84.78 cm)

Shipping Carton:  
18" x 28" x 38"  
(45.7 x 71.1 x 96.5 cm)

**Specifications**

	Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
Indoor	SCCG50MA-1SU	Stainless Steel / Unfinished	Gravity	113 / 51
	SCCP50MA-1SU	Stainless Steel / Unfinished	Pump	118 / 54
Outdoor	SCCG50MA-1SS	Stainless Steel / Stainless Steel	Gravity	122 / 55
	SCCP50MA-1SS	Stainless Steel / Stainless Steel	Pump	127 / 58

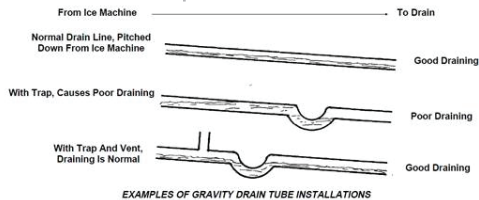

SCCG: Gravity flow drain tube  
SCCP: Built-in pump to expel drain water which includes 10' drain tube

**Accessories**

Model	Description	Shipping Weight lb / kg
KDFB	Black door front kit	12 / 5.5
KDFW	White door front kit	12 / 5.5
KDFS	Stainless Steel door front kit	12 / 5.5
KDFWS	White front with Stainless Steel handle kit	12 / 5.5
KDFBS	Black front with Stainless Steel handle kit	12 / 5.5
KKPF	Kick plate filler kit	1 / 0.45
KATB	Anti-tip bracket kit	2 / 0.9
KDFR	Retro-fit door front kit	8 / 3.6
KSSKP	Stainless Steel Kick Plate Cover	5 / 2.3

**Operating Requirements**

	Minimum	Maximum
<b>Air Temperatures</b>	50°F (10°C)	100°F (38°C)
<b>Water Temperatures</b>	40°F (4.4°C)	100°F (38°C)
<b>Water Pressures</b>	20 PSIG (1 bar)	80 PSIG (5 bar)
<b>Electrical Voltage</b>	-10%	+10%

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Scotsman products, except model SCCG50MA-1SS & SCCP5050MA-1SS, are not designed for outdoor installations nor for installation where air temperatures fall below 50°F, or exceed 100°F, nor where water temperatures fall below 40°F, or exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.