T24UR920DS







PROFESSIONAL SERIES HANDLE





Also Available:

T24UR910DS - With Masterpiece® Series Handle T24UR900DP - Custom Panel-Ready

FEATURES & BENEFITS

- Customizable cooling modes Fridge, Pantry and Bar
- SoftClose® drawers for ultra-smooth closing
- Customizable drawer dividers and shelving
- Quick Chill
- LED Lighting
- Drawer mats keep items from sliding and remove for easy cleaning
- Touch electronic controls for temperature management

GENERAL PROPERTIES	
SoftClose® Drawers	Yes
Lighting	LED Lighting
Customizable Aluminum Dividers / Shelving	Yes
Removable Drawer Mats	Yes
Full Extension Drawers	Yes
Drawer Open Alarm	Yes
Quick Chill	Yes
Touch Electronic Controls	Yes
STAR-K Certified Sabbath Mode	Yes
CAPACITY	
Total Capacity (cu. ft.)	5.0 cu. ft.
TEMPERATURE RANGES	
Refrigerator	33°F (0.5°C) to 58°F (14.5°C)
Pre-Set Cooling Modes	Refrigerator 37°F (3°C) Pantry 53°F (12°C) Bar 34°F (1°C)
Quick Chill	Refrigerator 33°F (0.5°C) for approximately 24 hours
TECHNICAL DETAILS	
Watts (W)	150 W
Current (A)	15 Amp
Volts (V)	115 V
Frequency (Hz)	(0.11
requeries (112)	60 Hz
Power Cord Length (in.)	64"
Power Cord Length (in.)	64"
Power Cord Length (in.) Plug Type	64"
Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT	64" 120V 3-Wire
Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.)	64" 120V 3-Wire 34 1/4"* x 23 7/8" x 24"
Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.)	64" 120V 3-Wire 34 1/4"* × 23 7/8" × 24" 35" × 24 3/16" × 24 9/16"
Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs.)	64" 120V 3-Wire 34 1/4"* × 23 7/8" × 24" 35" × 24 3/16" × 24 9/16"
Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs.) EFFICIENCY	64" 120V 3-Wire 34 1/4"* × 23 7/8" × 24" 35" × 24 3/16" × 24 9/16" 160 / 174 lbs.

Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect

2 Year

Limited Warranty for Sealed Refrigeration System*; Parts and Labor 3rd to 6th Year

Limited Warranty for Sealed Refrigeration System*; Parts Only

7th to 12th Year

Page 1 of 3 08 / 18

^{*}Height adjustable + 1/2" (13 mm) with legs fully extended

 $[\]hbox{**Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and}\\$ connection tubing


T24UR920DS

UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR

PROFESSIONAL SERIES HANDLE




DOUBLE DRAWER REFRIGERATOR PRODUCT DIMENSIONS

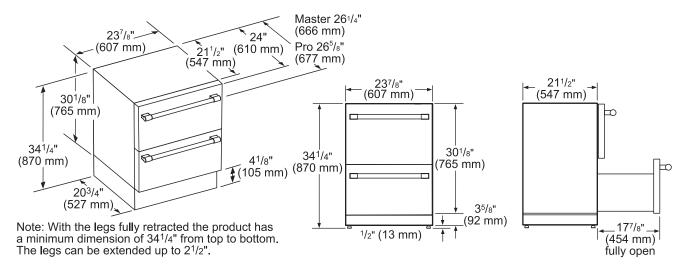


measurements in inches (mm)

DOUBLE DRAWER REFRIGERATOR CUTOUT DIMENSIONS




Thermador double drawer under counter top dimension. (Unit door flushed with the cutout)




measurements in inches (mm)

DOUBLE DRAWER REFRIGERATOR SIDE-BY-SIDE INSTALLATION



DOUBLE DRAWER REFRIGERATOR

CLEARANCE DIMENSIONS

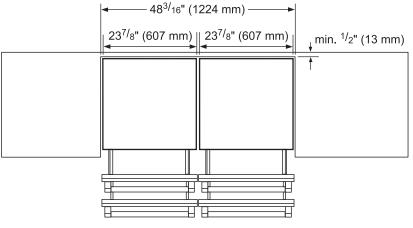


measurements in inches (mm)

Page 2 of 3 08 / 18

T24UR920DS UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR PROFESSIONAL SERIES HANDLE



DOUBLE DRAWER REFRIGERATOR CUTOUT DIMENSIONS & ELECTRICAL LOCATION

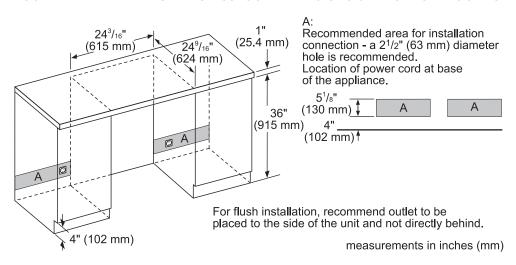

ACCESSORIES (OPTIONAL)

HANDLES

NOTE: Choose one handle for each glass door model, choose 2 handles for each double drawer model.



PR20HNDL20

20-Inch Professional Series Handle

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 3 of 3 08 / 18