

30-INCH INDUCTION PRO RANGE

HIPR30S | HERITAGE COLLECTION





AVAILABLE MODELS

HIPR3OS 30" Heritage Induction Pro Range - Stainless Steel

HIPR3OS-C 30" Heritage Induction Pro Range - Stainless Steel Canada

HIPR30C 30" Heritage Induction Pro Range - Color Match

HIPR30C-C 30" Heritage Induction Pro Range - Color Match Canada

FEATURES & BENEFITS

- → Exclusive Four-Part Pure Convection heating element, air baffle, fan and filter to precisely distribute heat for superior cooking results.
- → Large oven capacity 5.2 cu. ft.
- > 5 Powerful Induction Coils with BOOST
- → Bridge Element for Griddle and Long Cookware
- → Smooth Capacitive Glass Touch Control Cook Top
- → LED Tilt-Vue[™] Glass Touch Control for Oven
- → Soft Close Oven Door
- → Pro Style Bullnose, Handle

 	$N \cap A \cap A$	TURES


CLEANING TYPE	SELF CLEAN GREENCLEAN™
TYPE OF SURFACE	SMOOTH CERAMIC
CAVITY	BLACK ENAMEL COATING
RACK POSITIONS	6
LIGHTING	HALOGEN


GENERAL PROPERTIES		
OVEN CAPACITY (CUBIC FEET)	5.2 CU FT.	
COOKING MODES	PURE CONVECTION™ CONVECTION BAKE CONVECTION BROIL CONVECTION ROAST BAKE BROIL	
OVEN PERFORMANCE		
BAKE ELEMENT	3,000W - 8 PASS	
BROIL ELEMENT	3,500W - 8 PASS	
CONVECTION ELEMENT	2,300W - 2 PASS	
INDUCTION PERFORMANCE		
TOTAL NUMBER OF INDUCTION COILS	5 COILS + 1 BRIDGE ELEMENT	
LEFT FRONT (WATTS)	8" ROUND 1850W (3000W BOOST)	
LEFT REAR (WATTS)	8" ROUND 1850W (3000W BOOST)	
RIGHT FRONT (WATTS)	8" ROUND 1850W (3000W BOOST)	
RIGHT REAR (WATTS)	7" ROUND 1400W (2200W BOOST)	
CENTER (WATTS)	9" ROUND 2300W (3700W BOOST)	
BOOST MODE	YES	
ADDITIONAL MODES		
KEEP WARM	N/A	
PROOF	N/A	
TEMPERATURE PROBE	YES	
DEHYDRATE	N/A	
SABBATH	YES, OVEN ONLY	
CONTROL FEATURES		
LED (WHITE)	YES, TILT-VUE TOUCH	
NUMBER OF KNOBS	N/A	
CONTROL METHOD	LED GLASS TOUCH CONTROL	
ILLUMINA™ BURNER KNOBS	N/A	
HIGHLIGHTING COLOR	N/A	
CLOCK	YES	
DELAY START	YES	
KITCHEN TIMER	YES, 2	
TIME OF DAY (12 HR/24 HR) TEMPERATURE (F/C)	YES YES	
CHILD LOCK	YES	
SOUND ON/OFF	YES	
TECHNICAL DETAILS		
CIRCUIT BREAKER (A)	FO AMP	
VOLTS (V)	50 AMP 240 V	
FREQUENCY (HZ)	60 HZ	
ENERGY SOURCE	ELECTRICAL	
GAS TYPES	N/A	
DIMENSIONS & WEIGHT		
APPLIANCE DIMENSIONS (H X W X D) (IN.)	36 1/4" X 29 7/8" X 27"	
REQUIRED CUTOUT SIZE (W X D) (IN.)	30" X 24"	
WARRANTY		
LIMITED, PARTS AND LABOR	1 YEAR	



APPLIANCE DIMENSIONS		
30"		
A (WIDTH)	29 7/8" (75.9CM)	
B (DEPTH)	27" (68.6CM)	
C (HEIGHT)	36 1/4 TO 37 1/2 (92.0 TO 95.3CM)	

Product tolerances: +/- 1/6" (+/-1.6MM)






CABINET CUT-OUT DIMENSIONS		
RANGE MODEL	F	G
HIPR3OS	36" (91.4 CM)* 30" (76.2 CM)**	30" (76.2 CM)**

- * Recommended
- ** Minimum

Cutout tolerances: +1/16" (+1.6 mm), -O unless otherwise stated

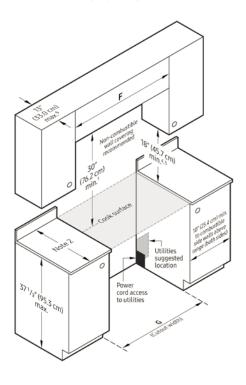

ACCESSORIES (INCLUDED)	
GLIDERACK™	2
STANDARD RACK	1
TEMPERATURE PROBE	1
CONVECTION FILTER	1

ACCESSORIES (OPTIONAL)	
COOKIE SHEETS (SET OF 3)	ACSRO303
BAKING STONE	ABS16
BROIL/ROASTING PAN W/GRILL & V RACK	AORPVR