


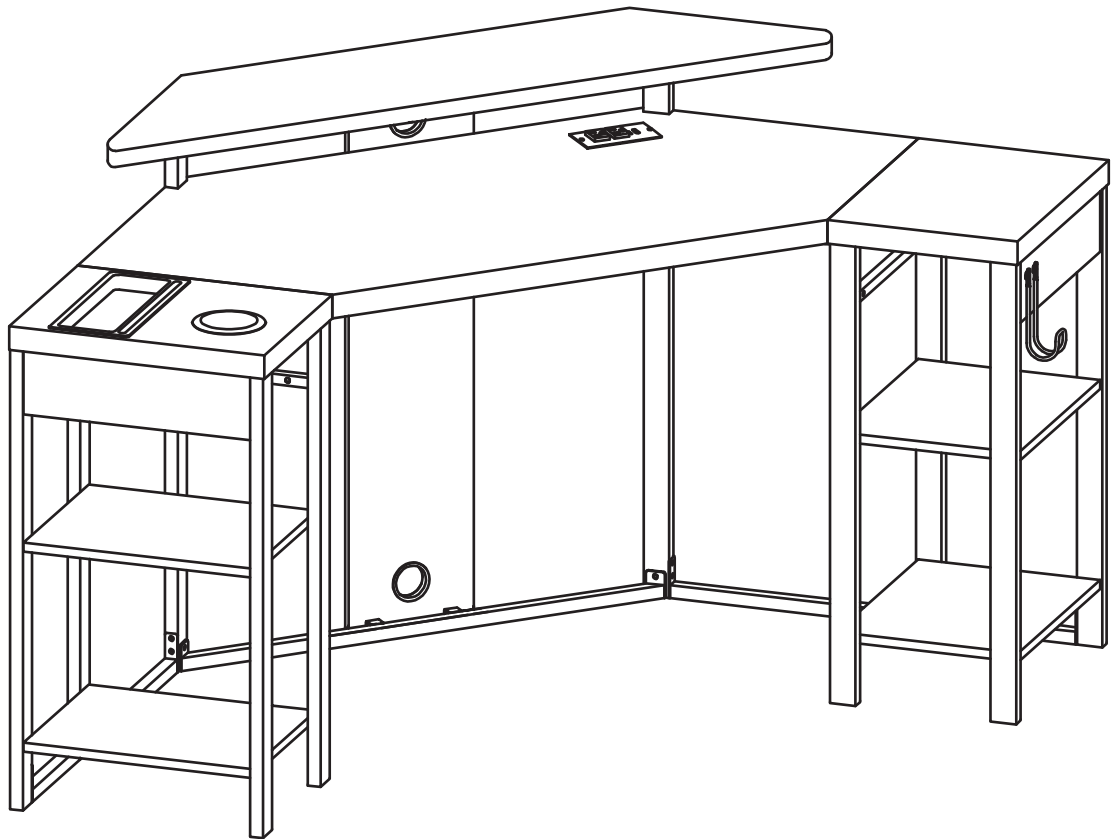

WARNING

1. Use this product only one person at a time.
2. Do not use unless all bolts, screws, and knobs are securely tightened.
3. Check that all bolts, screws, and knobs are tight every three months or as needed.
4. Dispose of packing material properly. Do not use plastic cover as head covering as it may cause suffocation.
5. Do not use this product as a stepladder.
6. Use this product for its intended purpose only.
7. Use only mild detergent for cleaning.

OSP FURNITURE LIMITED PRODUCT WARRANTY


Design Lab Products

- 3 years on gaming desks and chairs
- Upholstery is not warranted against routine scratching and scuffing

*All warranties are limited to the original purchaser for normal commercial usage defined as a standard forty hour work week by persons weighing 250 lbs. or less. This warranty will not cover labor, freight or damage from misuse, abuse, negligence, alteration, accident, vandalism, rusting, acts of nature or any other event beyond the control of Office Star Products. The warranty does not cover cosmetic damage that may result from normal use. Liability for incidental or consequential damages is excluded. The user assumes all risk of injury resulting from use of this product. When usage is more than 40 hours per week, a two year warranty on all parts applies. Fabric and foam is warranted for one year. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

It is the customer’s responsibility to prepay freight on any components returned to the factory. Return freight on components covered by warranty will be paid by Office Star Products.

Our quality standards are among the highest in the industry. Sometimes, no matter how hard we try, there are times when parts are damaged or missing. Our Parts Department will do everything possible to promptly remedy the problem. Contact us via e-mail parts.department@officestar.net by Fax 1-909-930-5629, or toll free parts number 1-800-950-7262, Monday through Friday 8:00 a.m. - 3:30 p.m. Pacific Time.

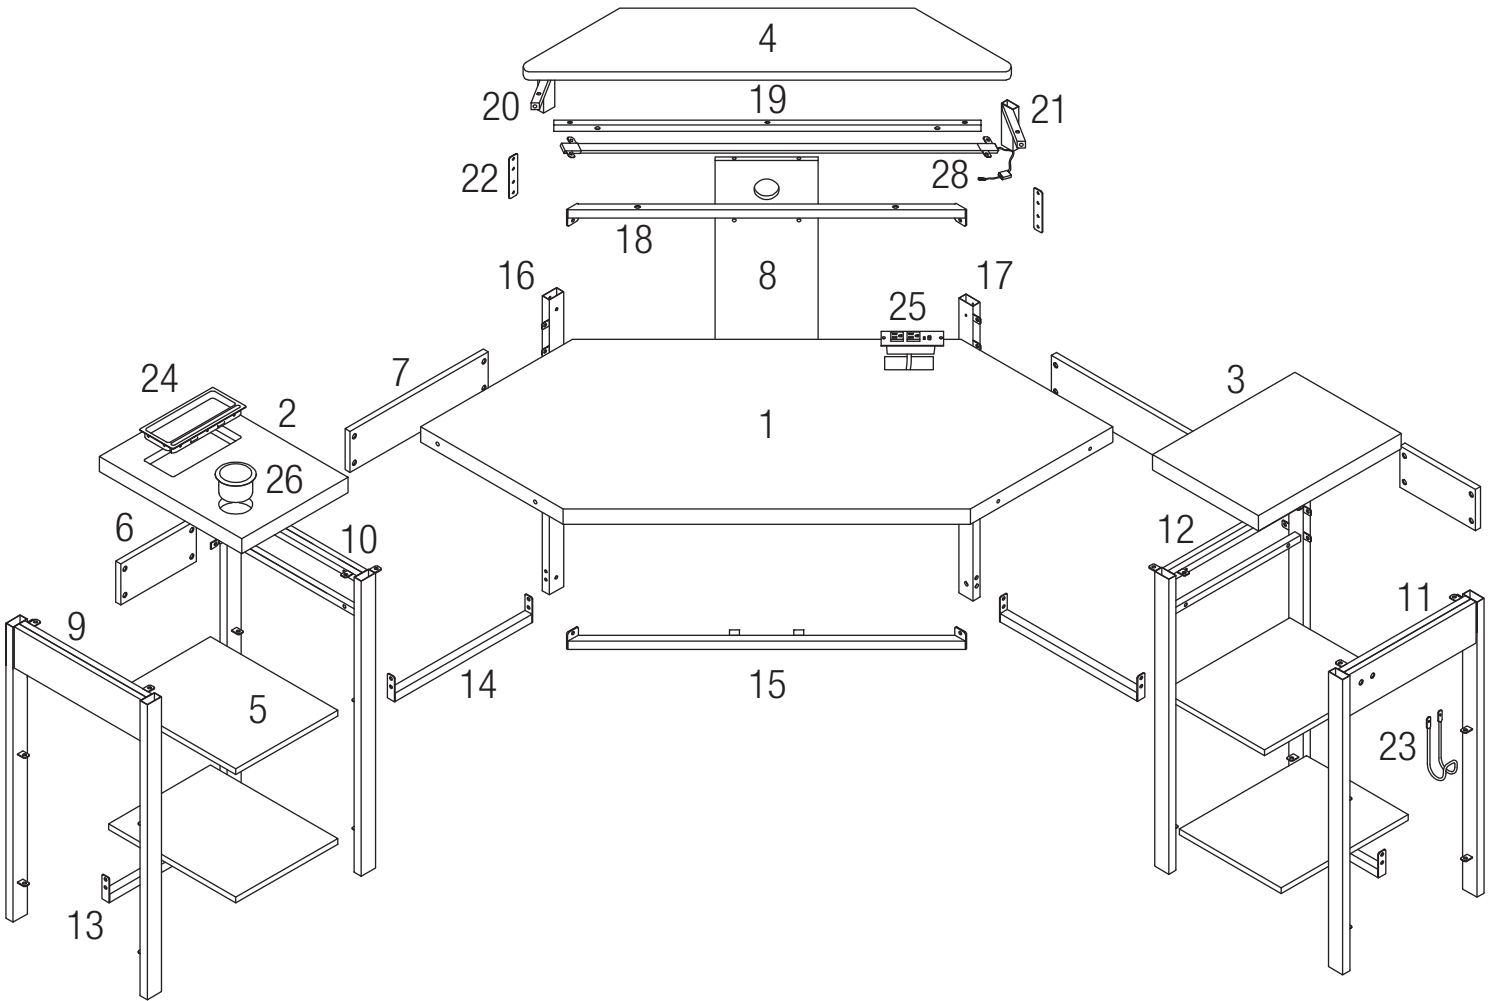

FCC INSTRUCTIONS

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for the Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interferences in a residential installation. This equipment generates, uses and can radiate frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Instructions shall caution users that modifications not approved by part responsible for compliance could void user's authority to operate the equipment.

BLUETOOTH LED – RGB INSTRUCTIONS

STEP 1

Scan QR Code or go to your app store and download the duoCo Strip app.

STEP 2

Start the app and select the menu at the top left of the app.

STEP 3

Select “My Devices” and your device name will show below. Make sure the link icon is not broken next to the device name. If it is, then just select the device name and refresh until the link icon shows a solid link.

Device linked
to Bluetooth



Broken link:
Device NOT linked
to Bluetooth



STEP 4

Select the menu again to return to the “Adjust” screen and toggle the ON/OFF switch to turn on the LED lights.

STEP 5

Select the settings icon in the top right and select “Guide” for more detailed instructions.

Click to show “My Devices”
Change Color Wheel



Settings
ON/OFF

Brightness

Preset Color Options


Function Options




Product Specifications:

Bluetooth:	BLE V4.2
Input Voltage:	4.5–26V
Working Temp:	-25C to 75C
Size:	43 x 22 x 11 mm
Weight:	30g
Max Power:	144W (24V)


PARTS




(1) Center Panel (1 Pc)




(2) Left Panel (1 Pc)




(3) Right Panel (1 Pc)




(4) Top Panel (1 Pc)




(5) Shelf Panel (4 Pcs)




(6) Small Back Panel (2 Pcs)




(7) Connecting Panel (2 Pcs)




(8) Back Panel (1 Pc)




(9) Left Leg Frame (1 Pc)




(10) Left Inner Frame (1 Pc)




(11) Right Leg Frame (1 Pc)




(12) Right Inner Frame (1 Pc)















(13) Short Connecting Bar (2 Pcs)




(14) Long Connecting Bar (2 Pcs)




(15) Bottom Connecting Bar (1 Pc)

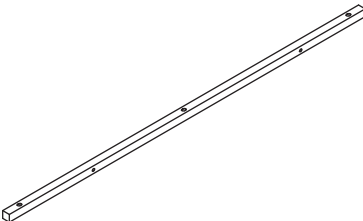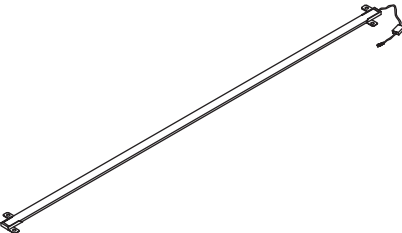PARTS		
 (16) Left Rear Leg (1 Pc)	 (17) Right Rear Leg (1 Pc)	 (18) Top Connecting Bar (1 Pc)
 (19) Top Support Bar (1 Pc)	 (20) Left Connecting Bar (1 Pc)	 (21) Right Connecting Bar (1 Pc)
 (22) Metal Connector (2 Pcs)	 (23) Hook (1 Pc)	 (24) Plastic Tray (1 Pc)
 (25) Power Outlet (1 Pc)	 (26) Cup Holder (1 Pc)	 (27) LED Power Supply (1 Pc)
 (28) LED Strip (1 Pc)		

STEP 14


26		x1
24		x1

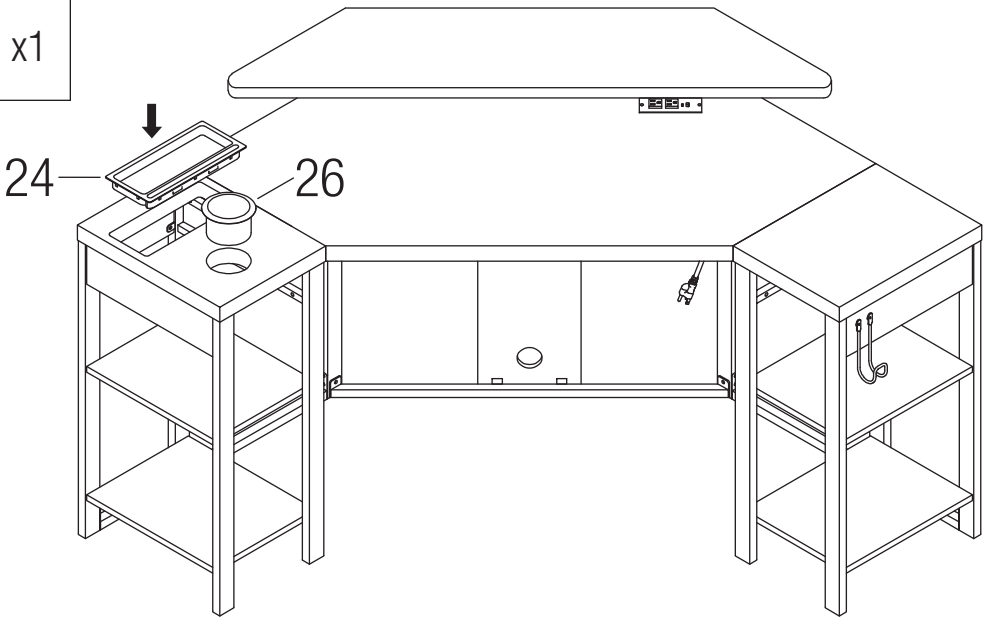

Insert Cup Holder (26) and Plastic Tray (24) into holes as shown.

STEP 15


I		x2
---	---	----

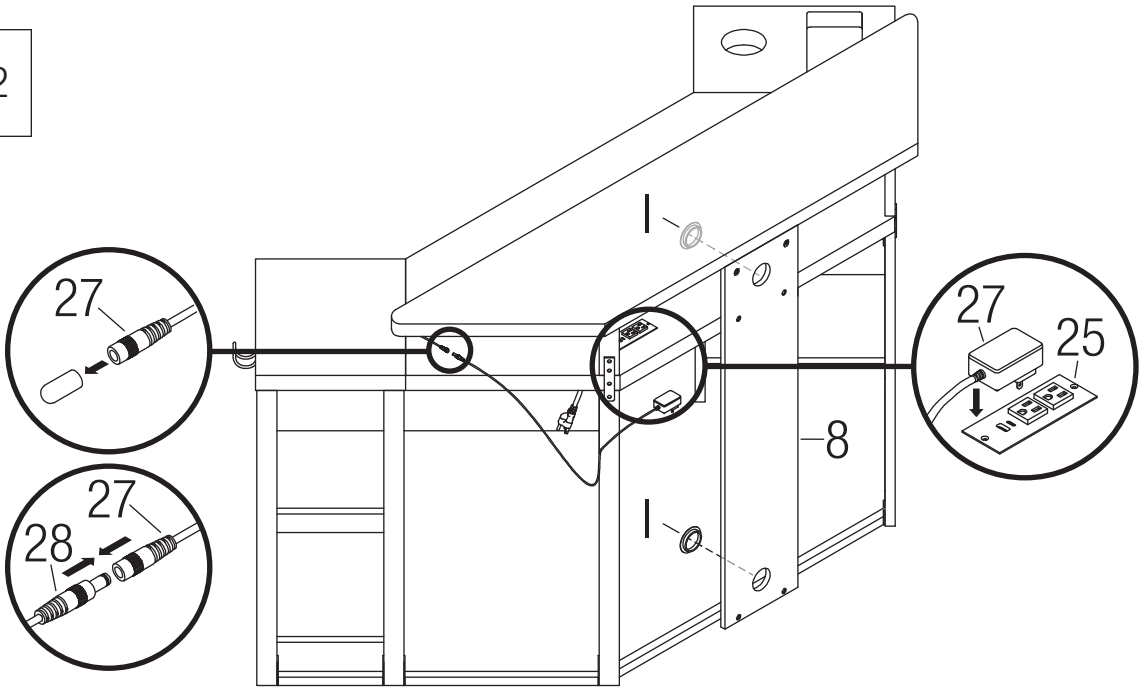

Remove cap from LED Power Supply (27) and connect to LED Strip (28). Plug LED Power Supply (27) into Power Outlet (25). Insert two Plastic Rings (I) into holes in Back Panel (8).






STEP 13

D		x2
A		x8

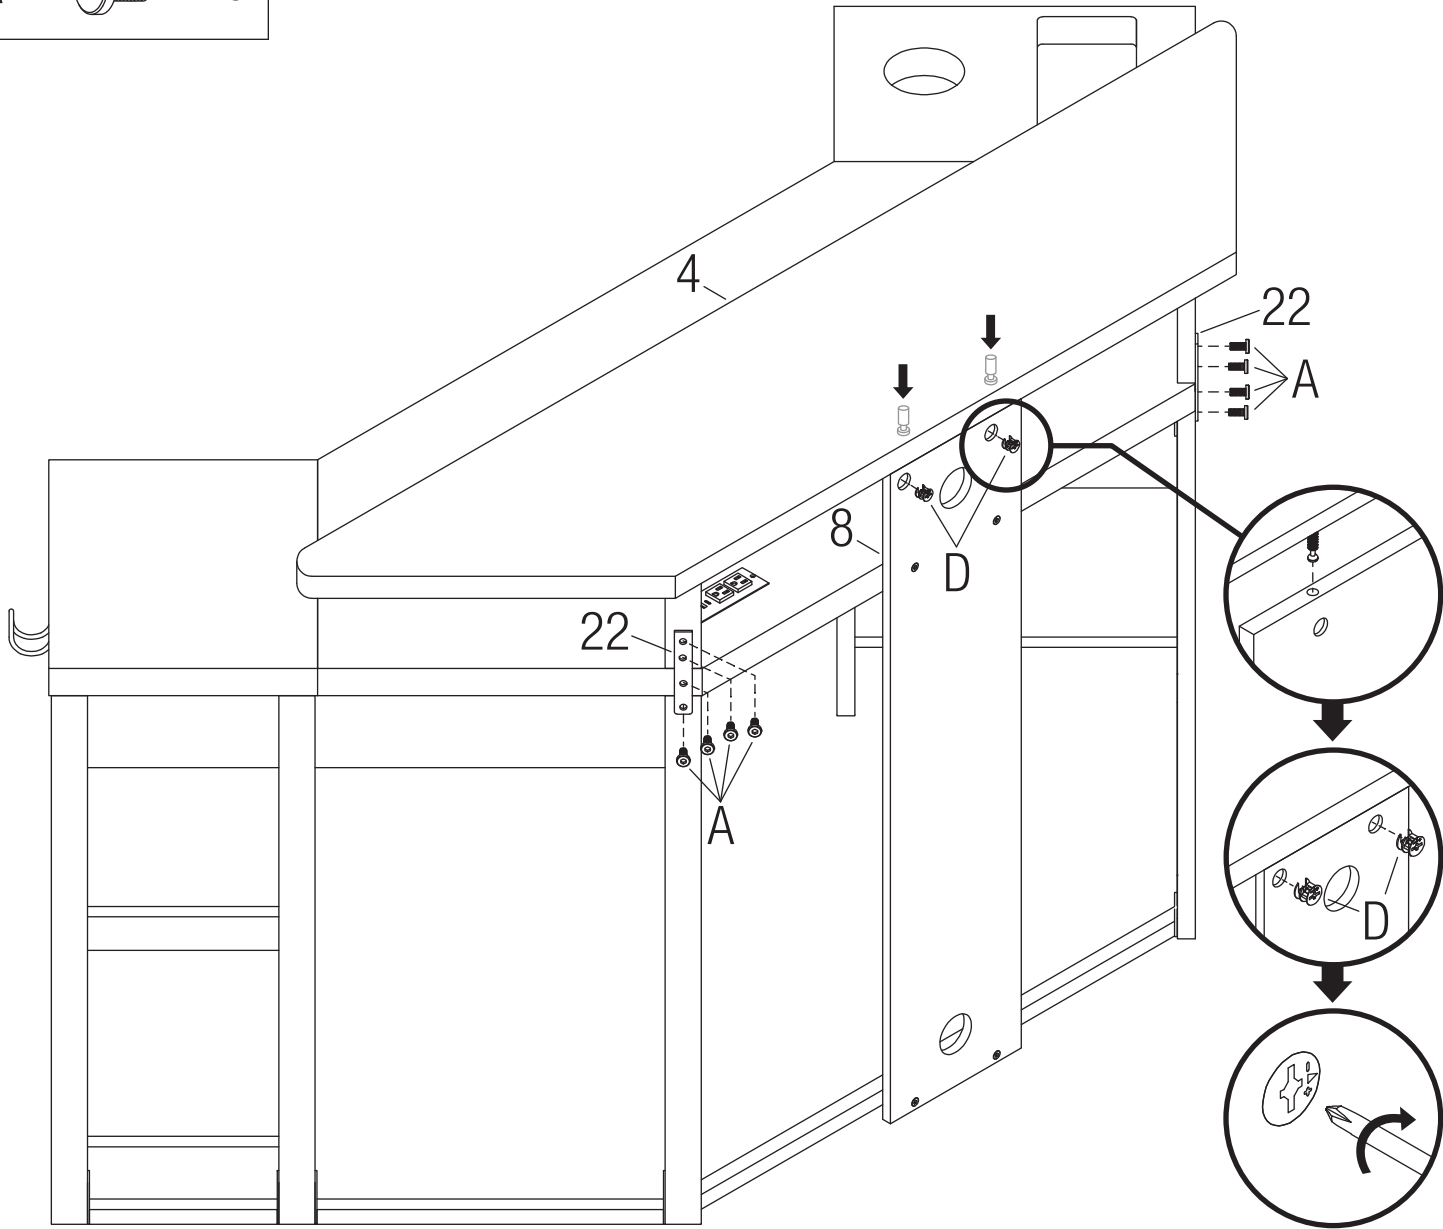


Insert two Cam Bolts on Top Panel (4) (from step 11) into holes in Back Panel (8) and attach using two Cam Locks (D). Secure Top Panel using two Metal Connectors (22) and four Allen Bolts (A) for each Metal Connector.


HARDWARE

NO	DRAWING	DESCRIPTION	QUANTITY
A		Allen Bolt - M6 x 10mm	72 Pcs + 4 extra
B		Wood Dowel	4 Pcs
C		Cam Bolt	2 Pcs
D		Cam Lock	2 Pcs
E		Allen Bolt - M6 x 30mm	13 Pcs + 1 extra
F		Allen Key	1 Pc
G		Phillips Screw	2 Pcs
H		Phillips Screw	4 Pcs
I		Plastic Ring	2 Pcs


CAM LOCK INSTRUCTIONS:



Screw Cam Bolt so it's flush with panel. Do not overtighten, and do not leave gap.





Align hole in panel with Cam Bolt and attach.





Insert Cam Lock into hole and turn clockwise until you feel Cam Lock securely fasten to Cam Bolt.

STEP 1

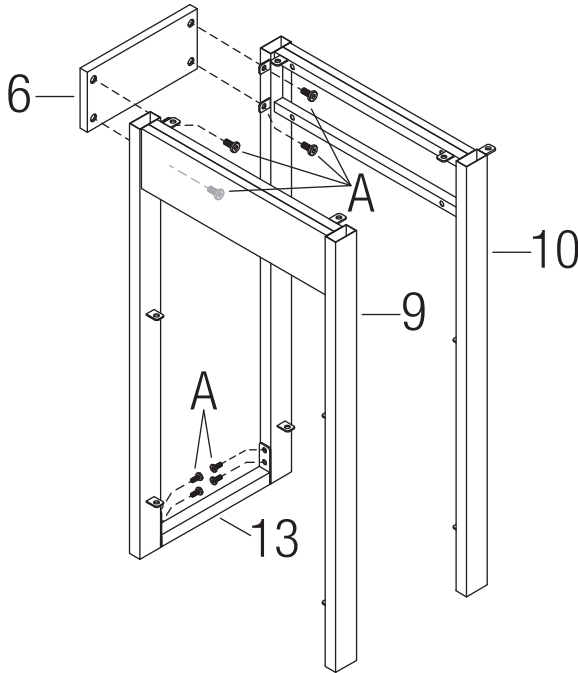



Remove all parts from carton, separate by part numbers indicated on parts list, and verify part quantities.
IMPORTANT: ASSEMBLE DESK ON A SOFT, NON MARRING SURFACE.
Attach Small Back Panel (6) to Left Leg Frame (9) and Left Inner Frame (10) using four Allen Bolts (A). **DO NOT FULLY TIGHTEN BOLTS.** Attach Short Connecting Bar (13) using four Allen Bolts (A). **DO NOT FULLY TIGHTEN BOLTS.**

STEP 2

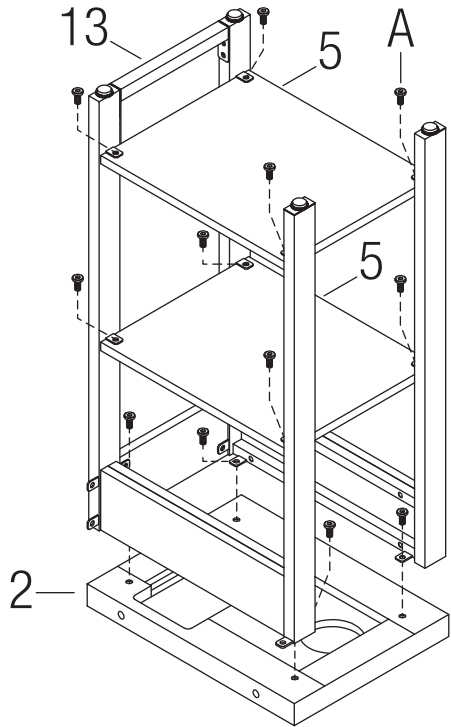



Turn assembly over with Short Connecting Bar (13) facing the rear. Attach two Shelf Panels (5) using four Allen Bolts (A) for each Panel. **DO NOT FULLY TIGHTEN BOLTS.** Attach assembly to Left Panel (2) using four Allen Bolts (A). **FULLY TIGHTEN ALL BOLTS IN STEPS 1 & 2.**

STEP 11

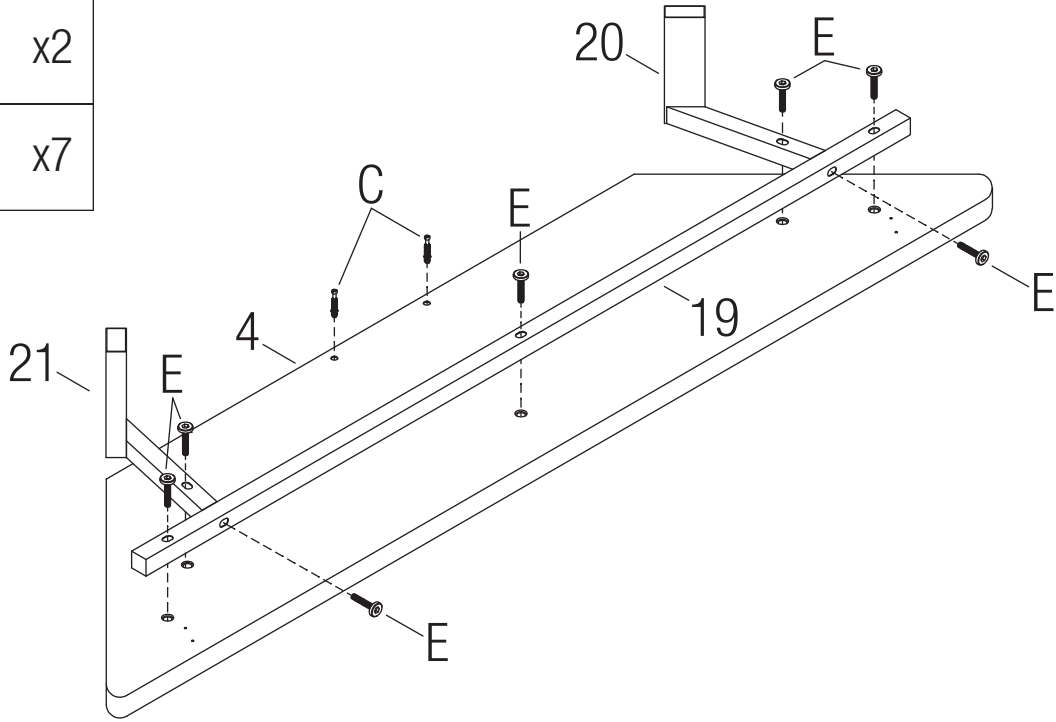


Attach two Cam Bolts (C) to Top Panel (4). **DO NOT OVERTIGHTEN.** Attach Left and Right Connecting Bars (20 & 21) to Top Support Bar (19) using one Allen Bolt (E) for each Bar. Attach Bar assembly to Top Panel (4) using four Allen Bolts (E). **FULLY TIGHTEN ALL BOLTS (E).**


STEP 12

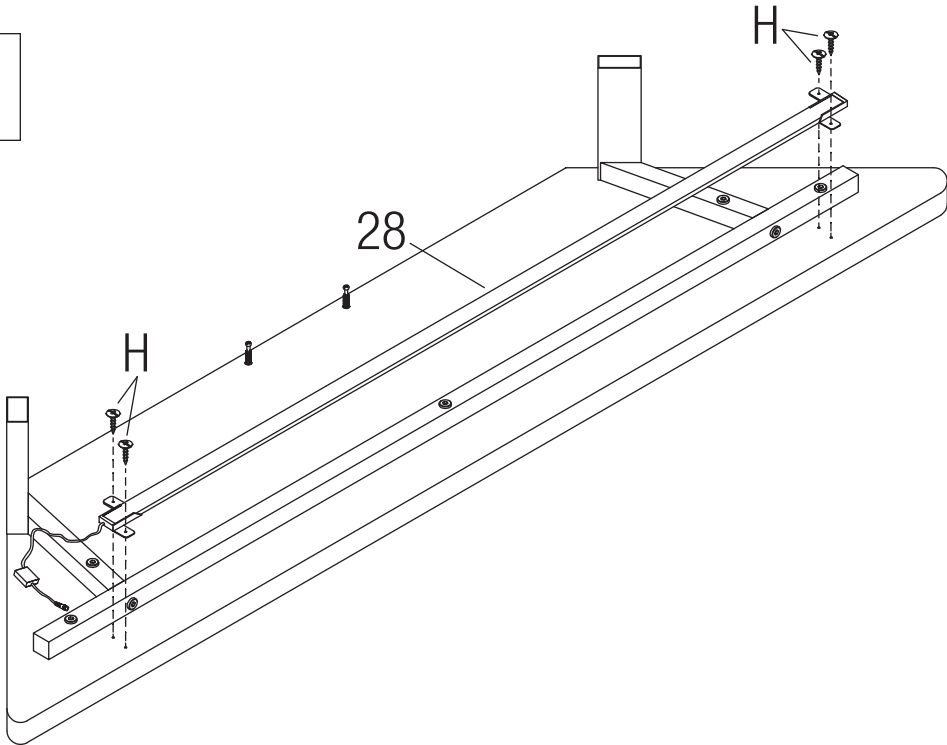

Attach LED Strip (28) to Top Panel using four Phillips Screws (H). **FULLY TIGHTEN ALL SCREWS.**


STEP 9


E		x2
B		x2
A		x4

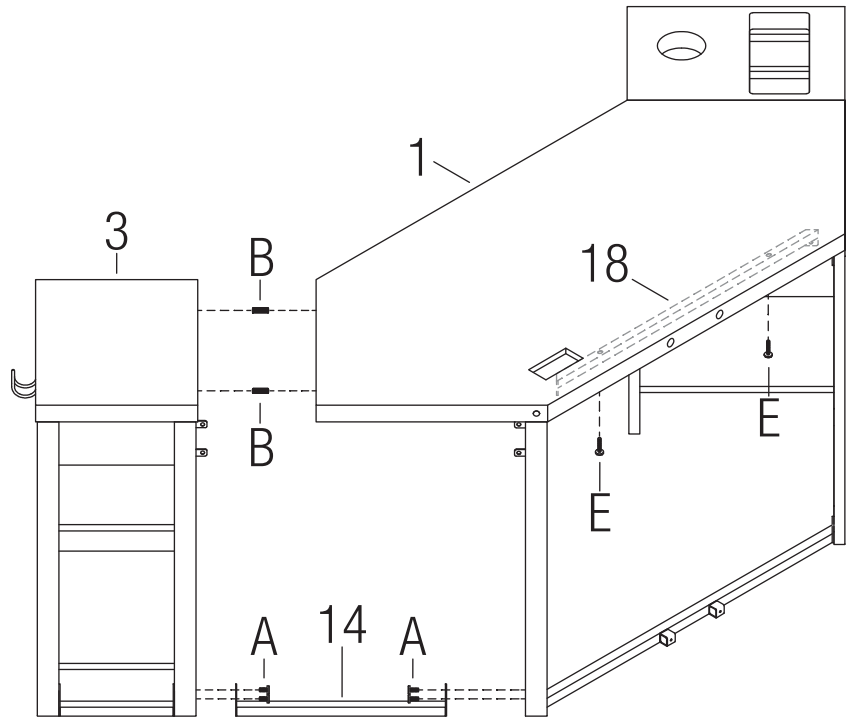

Insert two Wood Dowels (B) into holes Center Panel (1) and attach Right Panel (3). Attach Long Connecting Bar (14) using four Allen Bolts (A). **FULLY TIGHTEN ALL BOLTS.** Attach Center Panel (1) to Top Connecting Bar (18) using two Allen Bolts (E). **FULLY TIGHTEN ALL BOLTS.**


STEP 10


G		x2
E		x4
A		x5

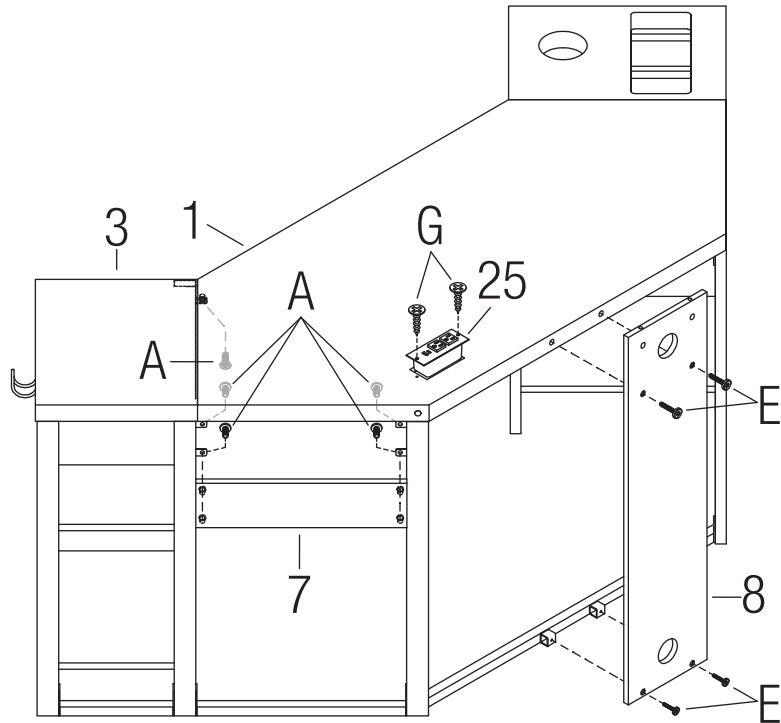

Attach Connecting Panel (7) using four Allen Bolts (A). Attach Center Panel (1) to Right Panel (3) using one Allen Bolt. **FULLY TIGHTEN ALL BOLTS.** Attach Back Panel (8) using four Allen Bolts (E). **FULLY TIGHTEN ALL BOLTS.** Attach Power Outlet (25) using two Phillips Screws (G). **FULLY TIGHTEN ALL SCREWS.**

STEP 3


A		x8
---	---	----

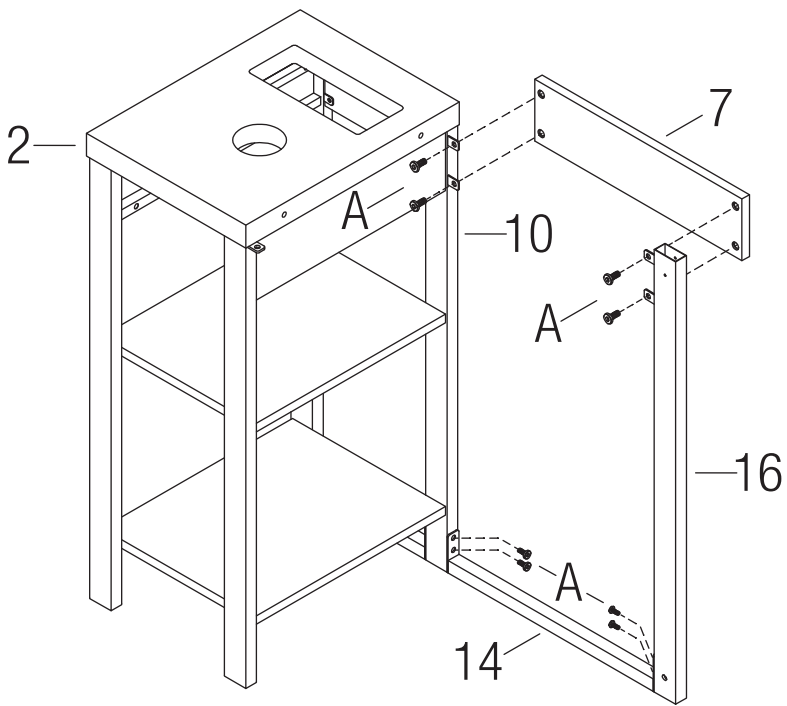

Turn assembly over. Attach Connecting Panel (7) to Left Inner Frame (10) and Left Rear Leg (16) using four Allen Bolts (A). **DO NOT FULLY TIGHTEN BOLTS.** Attach Long Connecting Bar (14) using four Allen Bolts (A). **FULLY TIGHTEN ALL 8 BOLTS.** Place assembly aside.



STEP 4

A		x10
---	---	-----

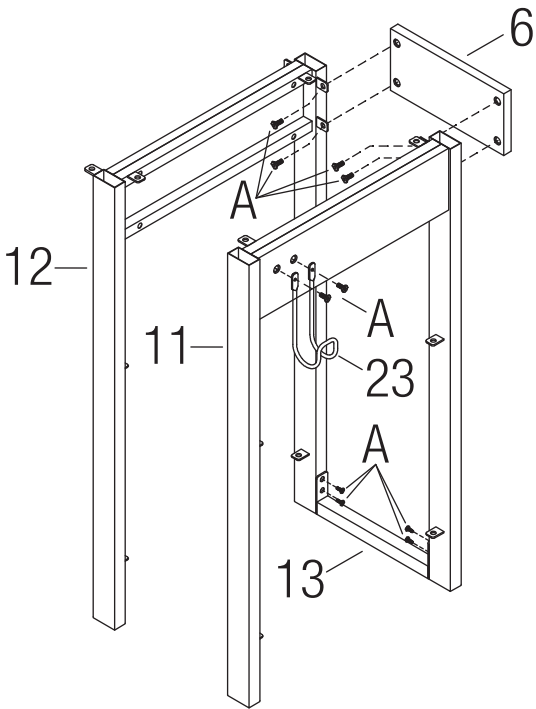



Attach Small Back Panel (6) to Right Leg Frame (11) and Right Inner Frame (12) using four Allen Bolts (A). **DO NOT FULLY TIGHTEN BOLTS.** Attach Short Connecting Bar (13) using four Allen Bolts (A). **DO NOT FULLY TIGHTEN BOLTS.** Attach Hook (23) using two Allen Bolts (A).

STEP 5

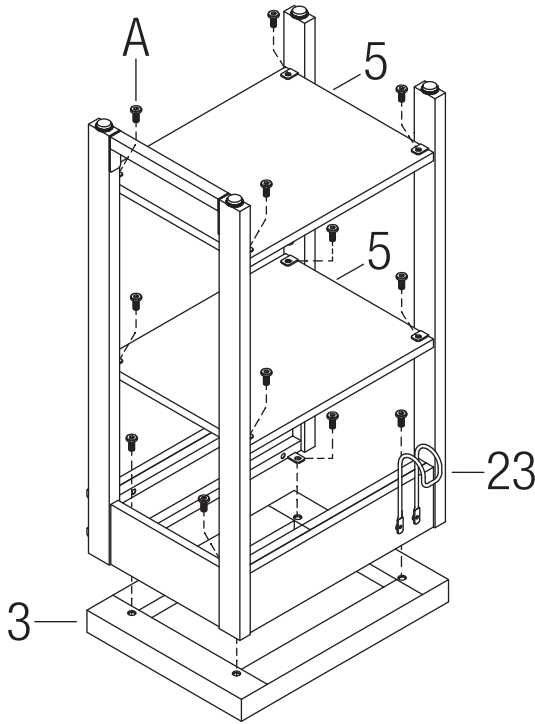



Turn assembly over with Hook (23) facing the front. Attach two Shelf Panels (5) using four Allen Bolts (A) for each Panel. **DO NOT FULLY TIGHTEN BOLTS.** Attach assembly to Right Panel (3) using four Allen Bolts (A). **FULLY TIGHTEN ALL BOLTS IN STEPS 4 & 5.** Place assembly aside.

STEP 6

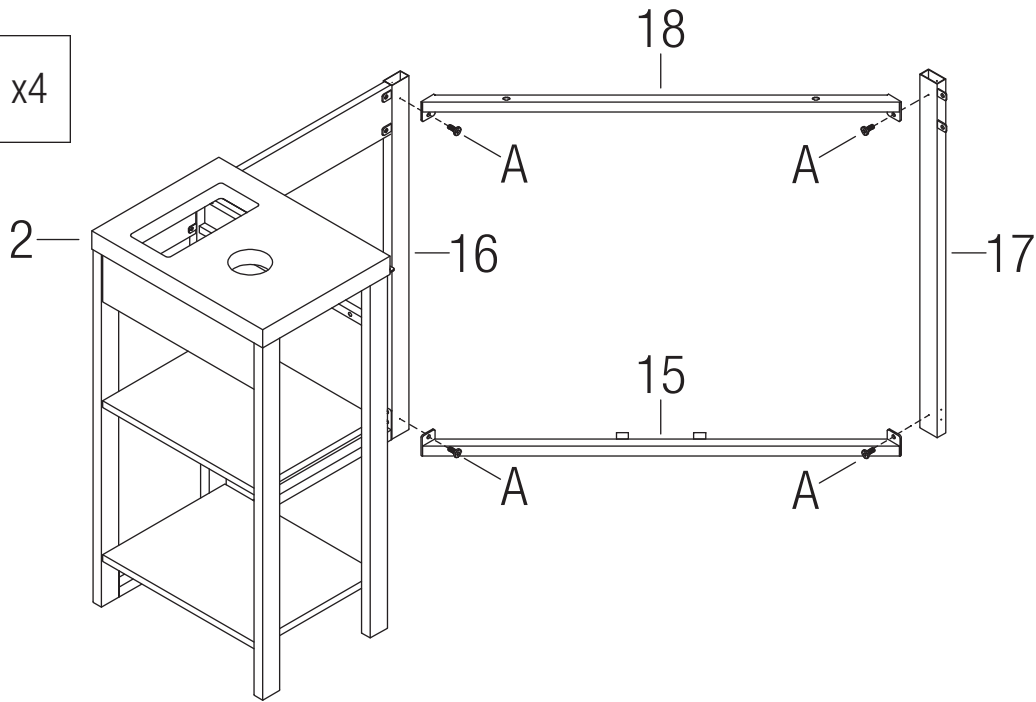



Take assembly from Step 3 and attach Top and Bottom Connecting Bars (18 & 15) to Left Rear Leg (16) and Right Rear Leg (17) using four Allen Bolts (A). **FULLY TIGHTEN ALL BOLTS.**

STEP 7

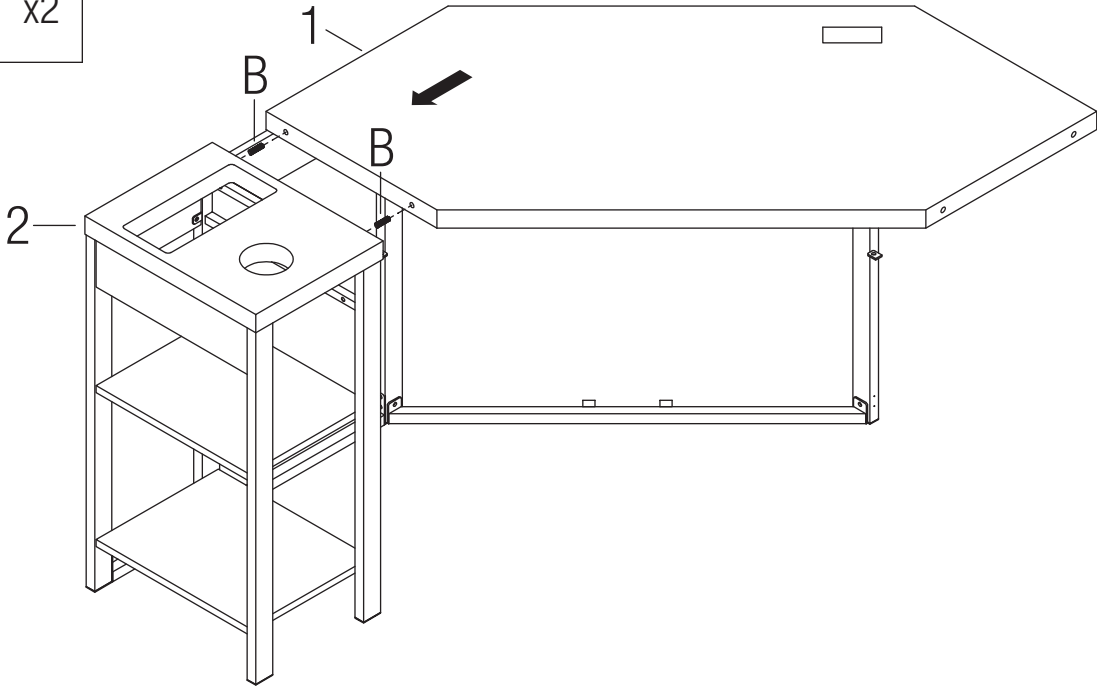

Insert two Wood Dowels (B) into holes in Center Panel (1) and attach Left Panel (2).

STEP 8

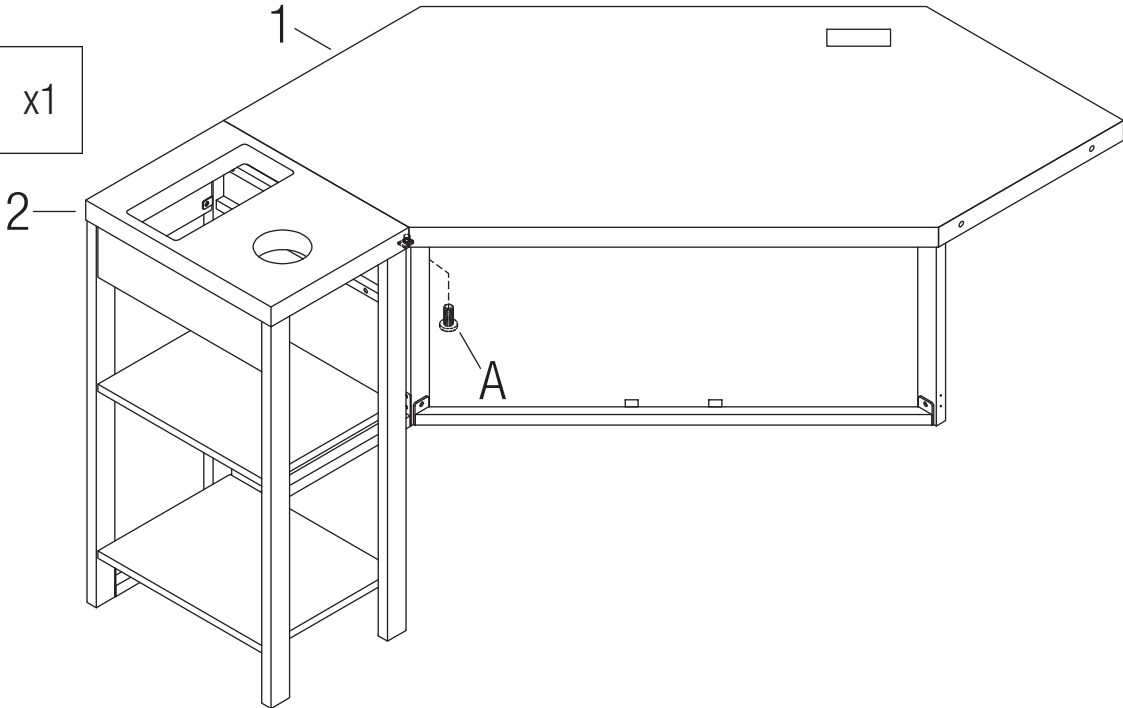

Attach Left Panel (2) to Center Panel (1) using one Allen Bolt (A). **FULLY TIGHTEN BOLT.**