
Purview 5.0



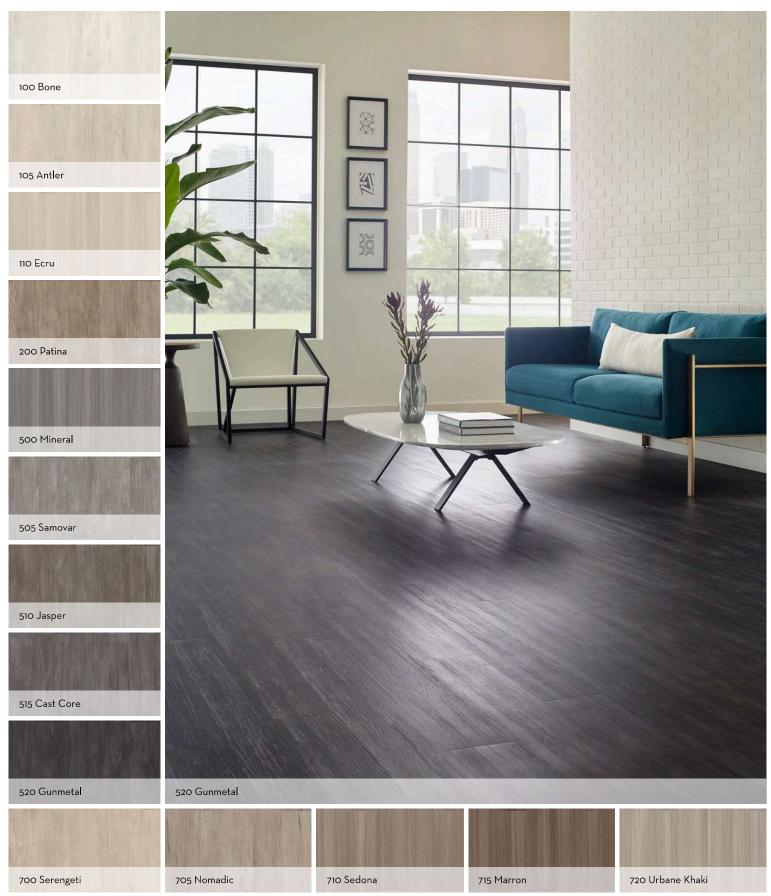

Purview 5.0

Style Name Purview 5.0
Style Number 5037V

Construction High Performance Luxury Vinyl Tile

Class / ASTM F1700 Class III Printed Film Vinyl Tile, Type B (embossed)

Finish ExoGuard+®

U.S. Metric

 Nominal Dimensions
 6 in w, 48 in l
 15 cm w, 122 cm l

 Actual Dimensions
 5.96 in w, 48 in l
 15.14 cm w, 121.92 cm l

Wear Layer Thickness 20 mil (0.02 in) 0.51 mm
Overall Thickness 0.197 in 5 mm

Installation Direct Glue

Recommended /

Required Adhesive Shaw 4100 or \$150

Packaging

Pieces per box 11 pcs

 Area per box
 21.85 sq ft
 2.03 sq m

 Weight per box
 37.13 lbs
 16.84 kg



Recommended Installation Method









Herringbone

Stagger

Performance Testing

Residual Indentation (ASTM F1914)

Resistance to Heat (ASTM F1514)

Resistance to Light (ASTM F1515)

Resistance to Chemicals (ASTM F925)

Radiant Panel (ASTM E648)

Slip Resistance (ASTM D2047)

Passes

Passes, Class I

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient Resilient 15 Year Commercial Limited

Environmental

Indoor Air Quality
Recycled Content

FloorScore® Certified

Pre-consumer - 0%, Post-consumer - 0%

floor score



Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

