


FEATURES

- Four design options: framed, overlay, flush inset and stainless steel.
- Electronic microprocessor constantly monitors entire unit to ensure proper food storage environment.
- Advanced water filtration system.
- Illuminated touch control panel.
- Bright interior lighting throughout, including storage drawer area.
- Adjustable wire shelves and door shelves.
- Easy-access flip-up grille.
- Automatic ice maker with max ice feature temporarily increases production.
- ENERGY STAR® qualified.



Model BI-36F

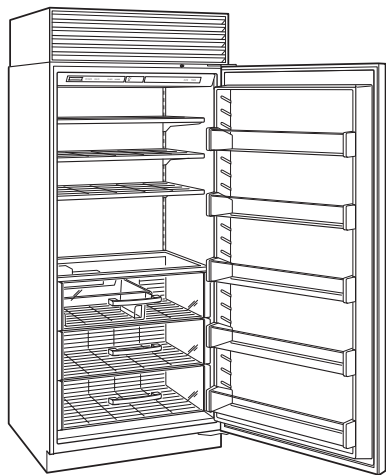

MODEL OPTIONS

Overlay (framed, flush inset)	BI-36F/O
Stainless (tubular handle)	BI-36F/S/TH
Stainless (pro handle)	BI-36F/S/PH

Specify RH or LH door.

INTERIOR FEATURES

- FREEZER**
- 3 Adjustable wire shelves
 - 1 Stationary glass shelf
 - 3 Storage drawers with dividers
 - 5 Adjustable door shelves

ACCESSORIES

- Grilles for 83" or 88" finished height (84" is standard).
- Framed front panel in white or stainless steel.
- Flush inset and dual flush inset panels in stainless steel with tubular or pro handle.
- Custom front panel mounting kit.
- Side panel in white or stainless steel.
- Stainless steel tubular and pro handles.
- Full-length standard and extended framed handles.
- Stainless steel kickplate.
- Dual installation kit with or without dual wide grille—84" finished height.
- Retrofit kit for 600 series panels.
- Replacement water filter.


Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.

SPECIFICATIONS	
PRODUCT	
Dimensions	36"W x 84"H x 24"D
Door Clearance	37 ³ / ₄ "
Weight	406 lb
CAPACITY	
Freezer	22.7 cu ft
ELECTRICAL	
Supply Service	115 VAC, 60 Hz 15 amp circuit
PLUMBING	
Supply Pressure	1/4" OD copper, braided stainless steel or PEX tubing 35-120 psi

Specifications are subject to change without notice. Visit subzero.com/specs for the most up-to-date information.


Dimensions may vary ±1/8" (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS

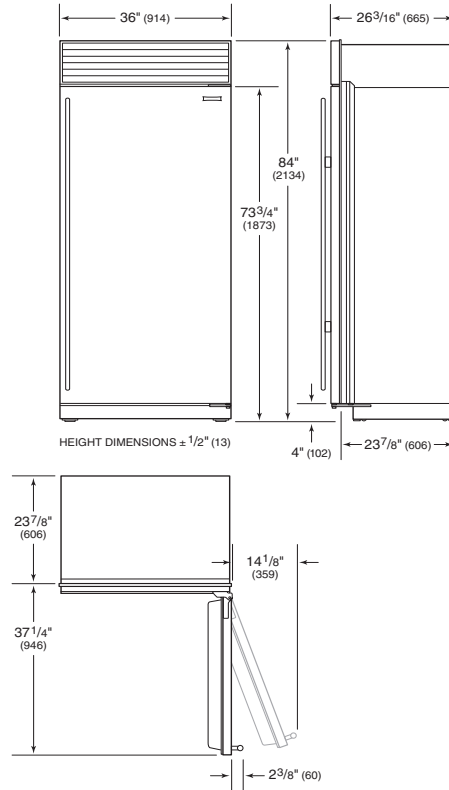


Dimensions based on stainless steel model. For flush inset, add 1/2" (13) to door clearance dimensions.


ELECTRICAL



PLUMBING




STANDARD INSTALLATION

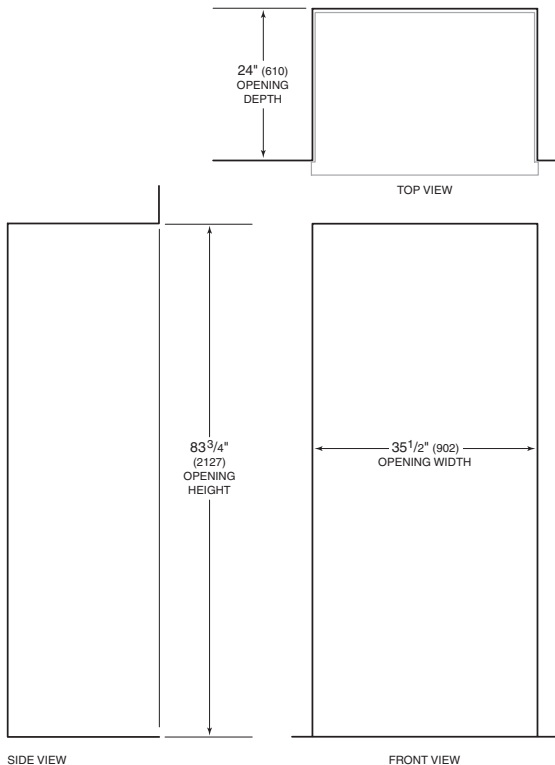

NOTE: Shaded line represents profile of unit.

FLUSH INSET INSTALLATION

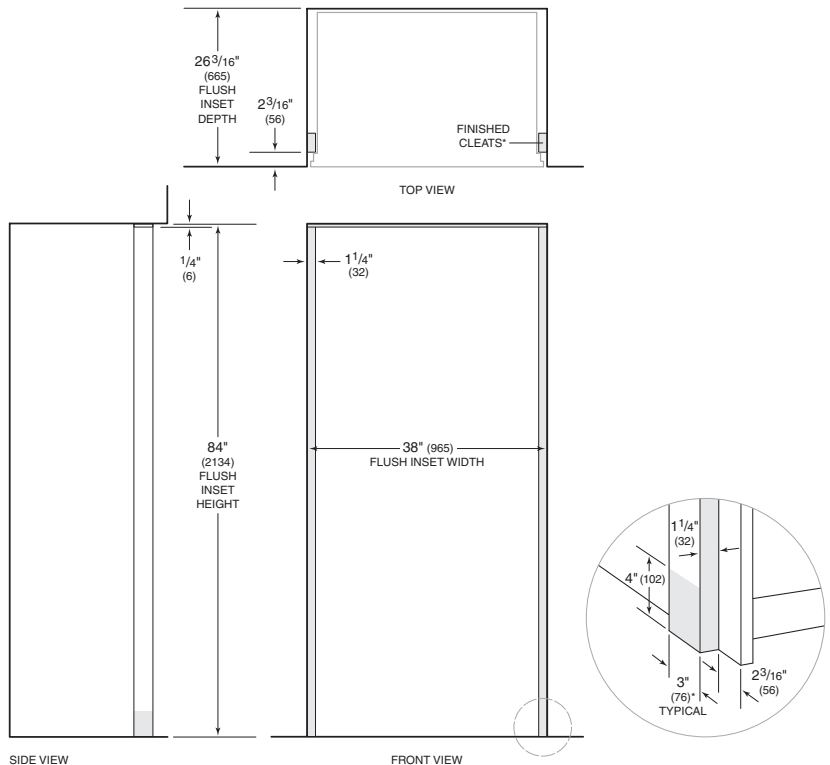

*3" (76) typical depth. Shaded areas will be visible and should be finished to match cabinetry.
NOTE: Shaded line represents profile of unit with 3/4" (19) panel.