


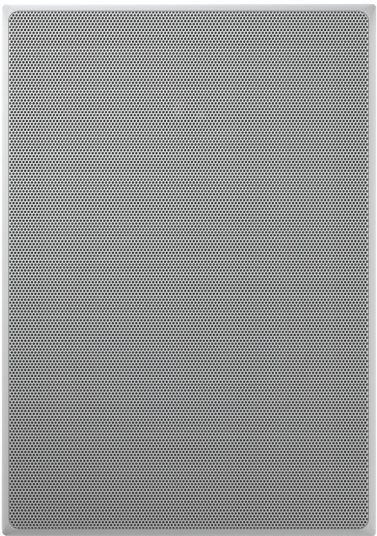

See nothing, hear everything

The CWM663 features a blue Aramid Fibre bass/midrange driver housed in a die-cast chassis which provides the extra rigidity to provide a cleaner, faster bass. Its aluminium tweeter also incorporates a Nautilus™ tube to absorb unwanted sonic radiation. The CWM663 also utilises a three-position high frequency switch to fine tune the sound. The speaker is incredibly easy to install incorporating QuickDogs™ and plug-and-play functionality.

Technical Specifications

Description	2-way in-wall system
Drive units	1x ø25mm (1in) Nautilus™ tube loaded aluminium dome tweeter 1x ø150mm (6in) blue Aramid Fibre cone bass/midrange
Frequency Range (-6dB)	45Hz – 50kHz
Maximum Amp Power	25 – 150w
Sensitivity SPL (2.83V, 1m)	88dB
Impedance Nominal (min)	8Ω (4.5Ω)
Frame height	315mm (12.4in)
Frame width	221mm (8.7in)
Cut-out height	279mm (11in)
Cut-out width	183mm (7.2in)
Depth behind surface	95mm (3.7in)
Protrusion	4mm (0.2in)
Pre-mount Kit	PMK W6
Back Box	BB 6W