

# RangeVault

**GVRV100BK22**





# The Leader in Responsible Firearm Storage


Since 1990, **GunVault** has been an industry leader and innovator of quick access personal safes. We pride ourselves on our commitment to manufacture firearm storage solutions that provide the highest level of quality and security that you need. At **GunVault**, we understand that in a time of crisis you rely on quick access and unbeatable security.

We are honored that you have selected our products and welcome to the **GunVault** family.

## Index

|                                                    |   |
|----------------------------------------------------|---|
| »» <b>Product Features</b> .....                   | 3 |
| Battery Installation                               |   |
| Programming                                        |   |
| Opening Your Safe                                  |   |
| »» <b>Safety Features</b> .....                    | 4 |
| Resetting Passcode                                 |   |
| Turning the Keypad Sound On / Off                  |   |
| Low Battery Warning Indicator                      |   |
| Security Sleep Mode                                |   |
| Clearing All Codes                                 |   |
| »» <b>Security Cable Instructions</b> .....        | 5 |
| »» <b>Warnings</b> .....                           | 6 |
| »» <b>GunVault Exclusive 5 Year Warranty</b> ..... | 7 |
| »» <b>Warranty Registration</b> .....              | 8 |

# Product Features

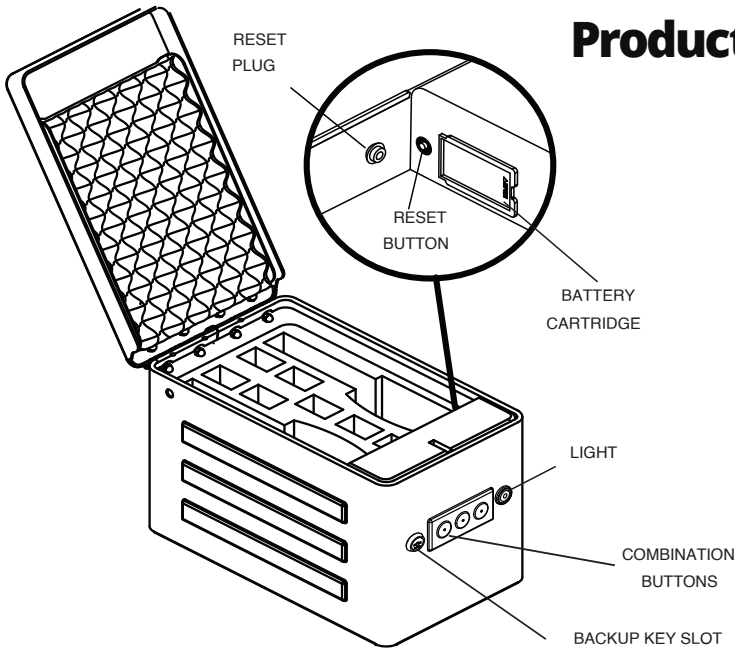

## » Battery Installation

**STEP 1** - Open the unit by inserting key into the lock and turning clockwise until the cover automatically opens

**STEP 2** - press the tab on the battery cartridge and remove it from the safe. Install 4 "AAA" alkaline batteries into the cartridge noting proper + and - locations. Reinsert the cartridge while being careful not to pinch the wires..

\* GunVault highly recommends the use of either Duracell or Energizer "AAA" alkaline batteries with an expiration date of 5 years in the future.

## »» Programming

An access code is a series of entries on the keypad. An entry is a single press of one button. Leave the unit door open while you program your safe.

**STEP 1** - Remove the plug covering the reset button, then use a small screwdriver or other tool to gently press and release the reset button. The Blue light will flash 2X with beep 2X.

**STEP 2** - Within 5 seconds, enter your 3-8 button Security Code. The green light will flash and a beep will occur with each button pressed.

**STEP 3** - Within 5 seconds, confirm your new code by pressing the reset button and releasing it. The blue light will flash 2X with beep 2X.

**STEP 4** - Replace reset plug.

**STEP 5** - Confirm your combination was entered correctly. Turn the key counter-clockwise to the locked position (the lid may remain open). Enter your complete Security Code. If your code was accepted: The green light will flash 2X with beep 2X.

**NOTE:** If your code was rejected, the red light will flash 3X with beep 3X. If the code does not work, perform programming steps 1 - 5.

**DO NOT SHUT THE LID UNTIL YOU HAVE CONFIRMED THAT YOUR NEW SECURITY CODE HAS BEEN ENTERED AND OPERATES CORRECTLY.**

**ALWAYS KEEP BACKUP KEYS IN A SECURE LOCATION OUTSIDE OF THE SAFE.**

**IMPORTANT:** The factory preset code must be changed prior to using the safe to ensure safety and the security of your valuables. It is the owner's responsibility to maintain the code.

Now you are ready to use your safe.

## »» Opening Your Safe

**STEP 1** - Enter your complete Security Code. If your code was accepted: The green light will flash 2X with beep 2X.

**NOTE:** If your code was rejected, the red light will flash 3X with beep 3X. If the code does not work, use backup key to gain entry and perform programming steps 1 - 5.

## »» Resetting Passcode

**STEP 1** - Open the unit by using either your backup keys or current access code and locate the reset button.

**STEP 2** - Use steps (3-7) in the Programming section to change your current combination.

**STEP 3** - Now you have successfully reprogramed your safe. Test your access code to confirm that your unit has been properly programmed.

**STEP 4** - Your safe is now ready for use.

## Safety Features

### »» Turning the Keypad Sound Off / On

- Your case comes with the "Beep" sound turned on. You can turn off the "Beep" sound of the keypad by pressing middle button and holding for 3 seconds until the light flashes green then purple.

- To turn the "Beep" sound on, press the middle button and hold for 3 seconds until the light flashes green then purple with beep 1X.

### »» Low Battery Warning Indicator

**STEP 1** - When the batteries are low, the light will flash red when the buttons are pushed.  
Replace the "AAA" batteries with new alkaline batteries.

**STEP 2** - Replace your battery by using steps in section labeled "**Battery Installation**".

**\*The low battery indicator only operates when you are in the process of opening your unit.**

## »» Security Sleep Mode

- If an incorrect code is entered 3 times:  
Red light will flash 5x with beep 5X followed by a 1 minute lockout.

- The lockout period expires when the green light flashes 1X with beep 1X

- If after the 1 minute lockout expires, 1 more incorrect code is entered the red light will flash 5X with beep 5X followed by a 5 minute lockout.

- The lockout period expires when the green light flashes 1X with beep 1X

- The case may still be opened using the supplied Key to override failed security code.

- To close the case, push the lid closed until locked.

## »» Clearing All Codes

**Clearing the codes will erase programmed security codes.**

**STEP 1** - Locate the reset button on the inside of the case and press and hold until the green light flashes 10X with beeps 10X.

**NOTE:** Failure to follow instructions will not erase the code.

The recorded security code will be erased. You will need to reprogram your security code. See the programming section of this instruction sheet.


## »» Using The Security Cable

**THE CASE SHOULD ALWAYS BE KEPT OUT OF THE REACH OF CHILDREN.**

NOTE: This case can be secured with the security cable provided. The safe and security cable should be attached to a fixed object.

**STEP 1** - First, loop the end of the security cable through the eye and around a sturdy surface.

**STEP 2** - With the case door open, secure the cable through the wall of the safe and secure using cable clip on inside of the safe.

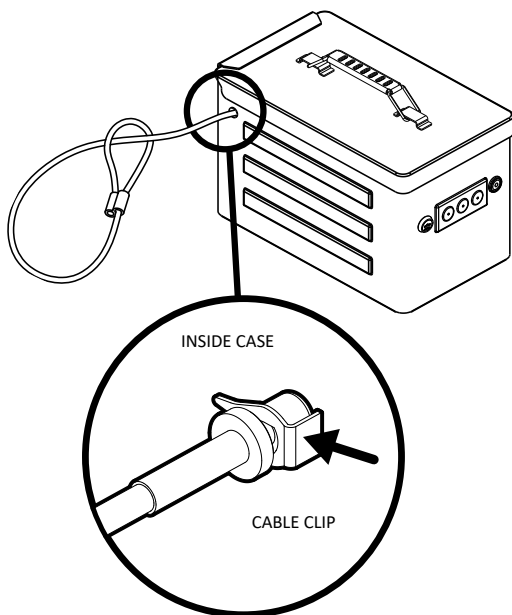

## Safes, Accesories and More!

Loving your new GunVault safe and want to purchase more?

Check out our website [www.GunVault.com](http://www.GunVault.com) for special promotions, product information and more.

### »» SAFE CATEGORIES    »» ACCESSORIES    »» VITAL INFORMATION

- Digital Safes
- Biometric Safes
- AR Safes
- Security cable
- MagVault
- Downloadable manuals
- How-to video tutorials
- Warranty registration
- Frequently Asked Questions
- and MORE

**VISIT OUR WEBSITE FOR FAQ'S, VIDEO TUTORIALS AND MORE.**

## Safety Warnings

- Always keep your safe closed and locked when not in use.
- Children should not play with, around or in any safe at any time.
- Keep backup keys and access code combinations in a secure place away from children.
- Keep the included high-strength steel security cable in a secure place away from children.
- This safe or any other firearm storage device cannot take the place of other safety procedures, including advising children of the dangers of firearms.
- Keep a record of your key number and serial number in a secure place separate from your safe.
- To enjoy the maximum-security benefits of this safe, it must be mounted in place. Use of this product as a storage receptacle without mounting may compromise security of the safe.
- Do not mount any GunVault product with the door facing down. The contents may fall out when the door is opened.

**⚠ WARNING:** This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP) which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to **[P65Warnings.ca.gov](https://www.P65Warnings.ca.gov)**

## Important Notices

- The backup key is for emergency use only in the event of fingerprint failure or forgotten passcode. For replacement keys, visit **[GunVault.com/owner-center/key-replacement-form/](https://GunVault.com/owner-center/key-replacement-form/)** to complete the online key replacement form. To receive a replacement key, you will need to know the key number associated with your unit. You can find this information on the unit engraved on the key port.
- The manufacturer recommends that you lightly coat the door hinge spring and door latch-loop with quality oil at least once a year. Never spray anything into the latch mechanism as it can damage the safe.
- Do not try to remove the key while in the turned position. This may damage the unit or key.

## Firearm Safety

The manufacturer of this product does not recommend, suggest, advise, promote, or otherwise condone the ownership or use of firearms. We at GunVault believe the decision to own or use a firearm is a serious decision that should only be made by an adult who has carefully considered the risks and benefits of such a decision. GunVault recommends that you obtain as much information as possible on firearm safety. Always handle firearms as if they are loaded and ready to fire. Never drink alcohol or use drugs while operating this safe or any firearm. Never grab your firearm by the trigger when removing or placing in to safe. Always keep your firearm safety mechanism engaged while stored inside the safe. Always follow the firearm safety rules set out by the firearm's manufacturer.

# GunVault Exclusive 5 Year Warranty

1. GunVault (the "Company") warrants to the original consumer (the "Purchaser") of any GunVault safe (the "GunVault safe") purchased after January 1, 2014 against any damage caused by fire, burglary or attempted burglary for a period of five (5) years from the date of purchase.
2. The Company warrants to the purchaser that the GunVault safe will be free from defects in workmanship and materials for a period of one (1) year from the date of purchase.
3. These warranties are not assignable or transferable to any other person.
4. Any damage to the GunVault safe as a result of misuse, tampering, abuse, neglect, accident, improper installation, modification, unauthorized service, destruction, or the alteration of the serial number, or use in violation of the instructions furnished by the Company will void this warranty.
5. The sole responsibility of the Company shall be limited to the repair or replacement (in its sole discretion) of any component of the GunVault safe which fails to conform to this warranty at no cost to the purchaser for the period of the warranty.
6. Contact the Company directly to obtain service under this warranty. If it becomes applicable to send a defective product to the Company, a Return Authorization Number must first be obtained from the company. In order to obtain service under this warranty, purchaser must provide the Company with the following items (a) proof of purchase, (b) police or fire department report, (c) photographs of damaged safe, and (d) written testimonial.
7. Products shipped without prior Return Authorization and Return Authorization Number may not be accepted, and the Company will not be responsible for their disposition and/or cost of return to the owner.
8. The Company will not assume any responsibility for any loss or damage incurred in shipping. All return authorized products should include a copy of the original invoice in order for this warranty to be honored.
9. This warranty is not an insurance policy. The Company is not responsible for any manner of damage to or theft of the Purchaser's GunVault safe or its contents.
10. We recommend that the warranty registration be completed online in order to validate this warranty.
11. Any implied warranties that the purchaser may have are limited to the duration of the warranties described above. There are no further warranties that extend or apply beyond the face hereof, and the company expressly disclaims and excludes any and all warranties of merchant ability or fitness for a particular purpose. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.
12. Repair or replacement shall be the sole remedy for the purchaser under this warranty. The company shall not be liable for any direct, indirect, incidental or consequential damages, losses or expense arising from the use or misuse of the GunVault safe. Some states do not allow the exclusion or limitations of incidental or consequential damages, so the limitation may not apply to you.
13. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.
14. This warranty is only valid in the United States. If outside of the U.S. we encourage you to contact your point of purchase for further warranty help.



# GUNVAULT PRODUCT REGISTRATION

To submit your warranty registration, go to  
[www.GunVault.com/owner-center/product-registration/](http://www.GunVault.com/owner-center/product-registration/)  
or call our Customer Service Department at (847) 665-1626.

For key replacement visit the [GunVault.com/owner-center/key-replacement-form/](http://GunVault.com/owner-center/key-replacement-form/) to complete the online key replacement form. In order to receive a replacement key you will need to know the key number associated with your unit. You can find this information on the unit engraved on the keyport.

**PLEASE FILL OUT THE SECTION BELOW AND STORE  
IN A SAFE LOCATION OUTSIDE OF YOUR UNIT.**

**THIS IS NOT A REGISTRATION FORM**

**Safe Model:**

**Purchased from:**

**Date of Purchase:**

**Serial Number: (Select Models Only)**

(This number can be found inside unit)

**Key Number:**

## SAFE QUICK STRONG SMART®



### **Customer Support Hours:**

Monday - Friday 6:00 am - 4:00 pm (PST)

Excluding Holidays \*Hours subject to change

**(847) 665-1626**

© 2022 CANNON SECURITY PRODUCTS

2895 W. Capovilla Avenue Suite 140

Las Vegas, Nevada 89119

GunVault.com